
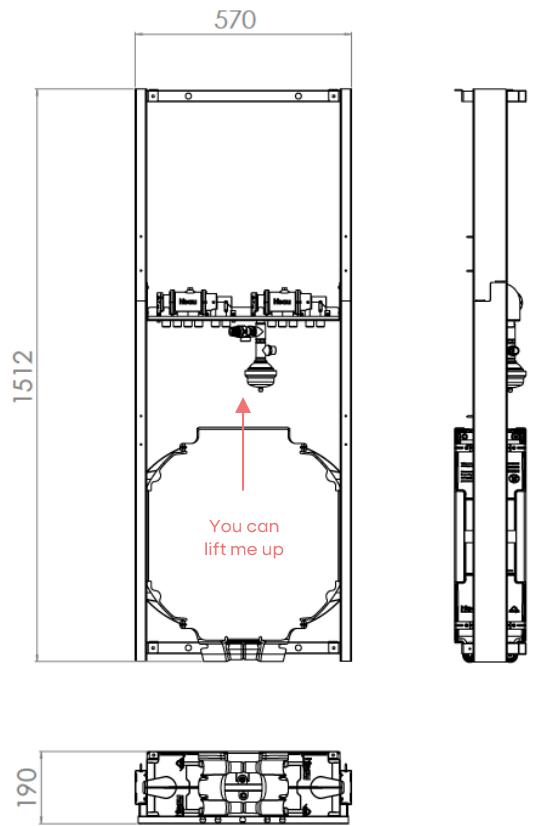


# Therm-eau fix

The universal instant hot water solution compatible with your bathroom design

h<sup>o</sup>eau  
instant hot water

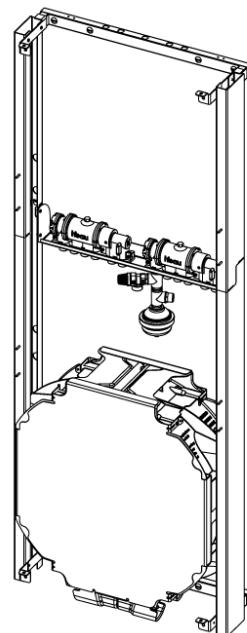

Heau reserves the right to alter, change or modify the product specifications without prior warning.

[www.heau.be](http://www.heau.be) • [info@heau.be](mailto:info@heau.be)

# Therm-eau fix

The universal instant hot water solution compatible with your bathroom design

**h<sup>o</sup>eau**  
instant hot water

## Features

- Instant hot water technology delivered preassembled on a steel frame
- Easy installation via Shower fix frame
- Compatible with your favourite shower style
- Electrical connection via 12V power supply
- Select your shower fixtures from any brand
- Shower niche to keep your bathroom items nicely organized
- Accessibility of all components via soap storage

## Customisation

Combine with your favourite finish and colour

### Handshower

Universal G½" connector to match all brands

### Headshower

Universal G½" connector to match all brands

### Tap

- Blaufoss (Smartbox & Dreambox & Pavilion)
- Hansgrohe (iBox universal 2)
- Grohe (Smartbox)

## Dimensions

Height: 151mm

Width: 570mm

Depth: 190mm

## Check your compatibility

- Min. temperature of hot water inlet: 55°C, according to NEN1006
- Max. 30m of pipes (internal diameter 20mm) between boiler and shower

- Verify by opening the hot water at 100%: If less than 10L of cold water comes out before it turns warm, you can enjoy the instant hot water technology!
- **Shower fix frame required for installation**

## Technical

- **Belgaqua** certified
- **Thermal storage:** The Therm-eau reservoir loses +/- 5°C per 24h at an ambient temperature of 20°C, retaining sufficient heat for at least 3 days. When the water temperature drops to 42°C, the heating element is activated to reheat the water.
- **Usage behavior:** For regular shower use, the system operates passively (no electricity). If the water temperature drops to 42°C (> 2 days without showering) the heating element automatically activates to reheat the water.
- **Self-regulating hydraulic valves**
- **Easy installation** via the Shower fix frame
- **Electrical connection:** via 12V power supply
- **10L water storage in** Therm-eau reservoir (equivalent to 30m of pipes with internal diameter 20mm)
- **Materials:** High-Quality stainless steel valves (614), vacuum insulation
- **Connection** hot & cold water: G½"
- **Operating pressure:** between 2 and 6 bar
- **Recommended flow:** 6 – 25 L/min
- **Temperature** of hot water inlet: between 55°C (according to NEN1006) and 75°C
- **Access:** Reservoir slides upward in internal rail system for easy access
- **Cleanable mesh filters** at inlet of h<sup>o</sup>eau valve
- **Safety against backflow**
- **Weight:** 34,2kg

## Instant hot water technology

by storing heat from the previous shower

