


## SHARK 2 QUAD

AM/FM GSM/UMTS GPS WIFI

EN Multifunction roof mount antenna with shark-fin design, made for reception of AM/FM, GSM/UMTS, GPS and WIFI signals. Compact size and sturdy and high-quality construction materials stand for great reliability and high performance of every function.

IT Antenna da tetto multifunzione a pinna di squalo realizzata per la gestione dei segnali AM/FM, GSM/UMTS, GPS e WIFI.

Le dimensioni compatte, la struttura robusta e l'elevata qualità costruttiva garantiscono grande affidabilità e prestazioni elevate per tutte le funzioni.

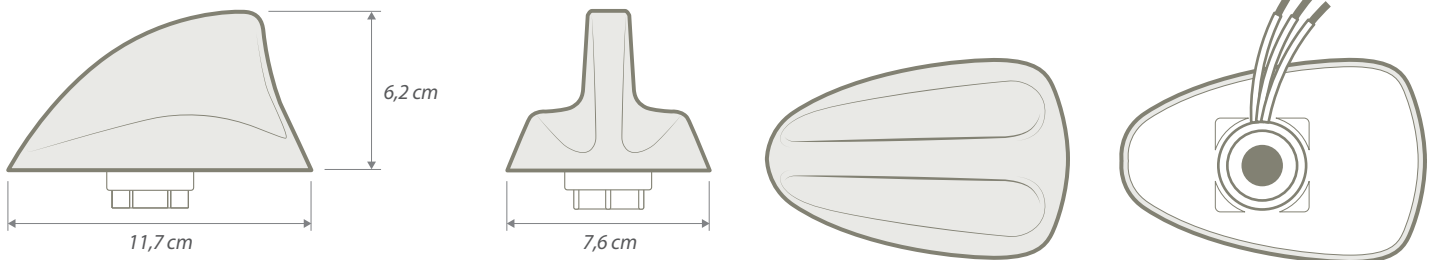

	AM/FM	GSM/UMTS	GPS	WIFI
<b>Connector - Connettore</b>	HC97 F (RAKU 2 F)	FMEF	SMB F	SMA M
<b>Ext. cable - Cavo prolunga</b>	-	(L = 5 mt Z = 50 Ω C = 101 pF/m)	(L = 5 mt Z = 50 Ω C = 100 pF/m)	-
<b>Power Supply - Alimentazione</b>	12V Phantom	-	3÷5V Phantom	-
<b>Consumption - Consumo</b>	50 mA	-	30 mA max	-
<b>Frequency - Frequenza</b>	0,15÷1,71 / 87,5÷108 MHz	890÷960/1710÷1880/1900÷2170 MHz	1575,42±1,023 MHz	2400÷2485 MHz
<b>VSWR - ROS</b>	-	TX < 1,5:1 RX < 2,5:1	< 2:1	< 2,5:1
<b>Gain - Guadagno</b>	-	2,15 dBi	≥ 27 dBi	1 dBi
<b>Max Power - Potenza Max</b>	-	4W	-	8W
<b>Polarization - Polarizzazione</b>	Vertical - Verticale	Vertical - Verticale	RHCP	Vertical - Verticale

<b>Mounting - Installazione</b>	Roof antenna	Antenna da tetto
<b>Coachwork drilling Foro Carrozzeria</b>	Square: 15x15 mm, R: 2 mm Foro quadrato: 15x15 mm, R: 2 mm	Round: 19 mm Foro rotondo: 19 mm
<b>Protection class - Protezione</b>	IP67	
<b>Temperature - Temperatura</b>	-40°C to +95°C	
<b>Weight - Peso</b>	200 g	

Specifications subject to change without prior notice - Specifiche tecniche passibili di modifica senza preavviso

