


# Rubber DAB-DAB+

DAB-DAB+ Band III (170 ÷ 240 MHz)

## DIGITAL RADIO

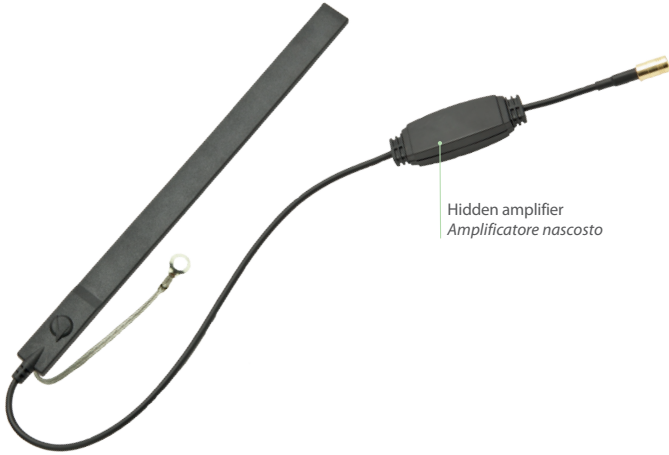

EN High-performance omnidirectional antenna for reception of DAB/DAB+ radio signals.



Thanks to the integration of the low-noise amplifier into its signal cable, the antenna has a thin and flexible body that makes it practically invisible when installed on car windows.

IT Antenna omnidirezionale ad alte prestazioni per la ricezione dei segnali radio digitali DAB/DAB+.

La forma sottile e flessibile, resa possibile dall'integrazione dell'amplificatore a basso rumore nel cavo segnale, rende semplice e discreta l'installazione su qualsiasi vetro del veicolo.

Suggested positions / Posizioni consigliate

Dimensions / Dimensioni

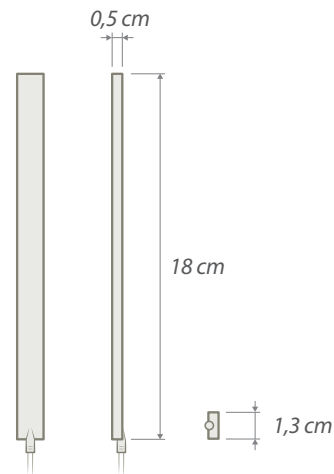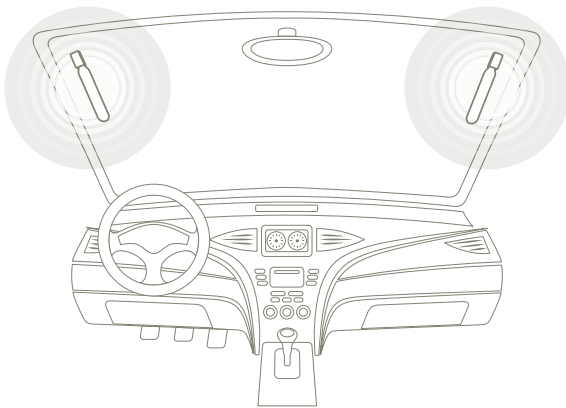

### DAB - DAB+

Connector - Connettore	SMB F 90°
Extension cable - Cavo prolunga	(L = 3,5 mt Z = 50 Ω C = 101 pF/m)
Consumption - Consumo	35 mA max
Power Supply - Alimentazione	12V Phantom
Frequency - Frequenza	III Band = 174 ÷ 240 MHz
VSWR - ROS	1.8 typical
Gain - Guadagno	III Band = 6 dBi
Polarization - Polarizzazione	Vertical - Verticale
Mounting - Installazione	Internal adhesive on-glass - Adesiva interna a vetro
Temperature - Temperatura	- 10° C to + 70° C
Weight - Peso	100 gr

Specifications subject to change without prior notice - Specifiche tecniche passibili di modifica senza preavviso

