




Technical Service Guide:

SD One MF

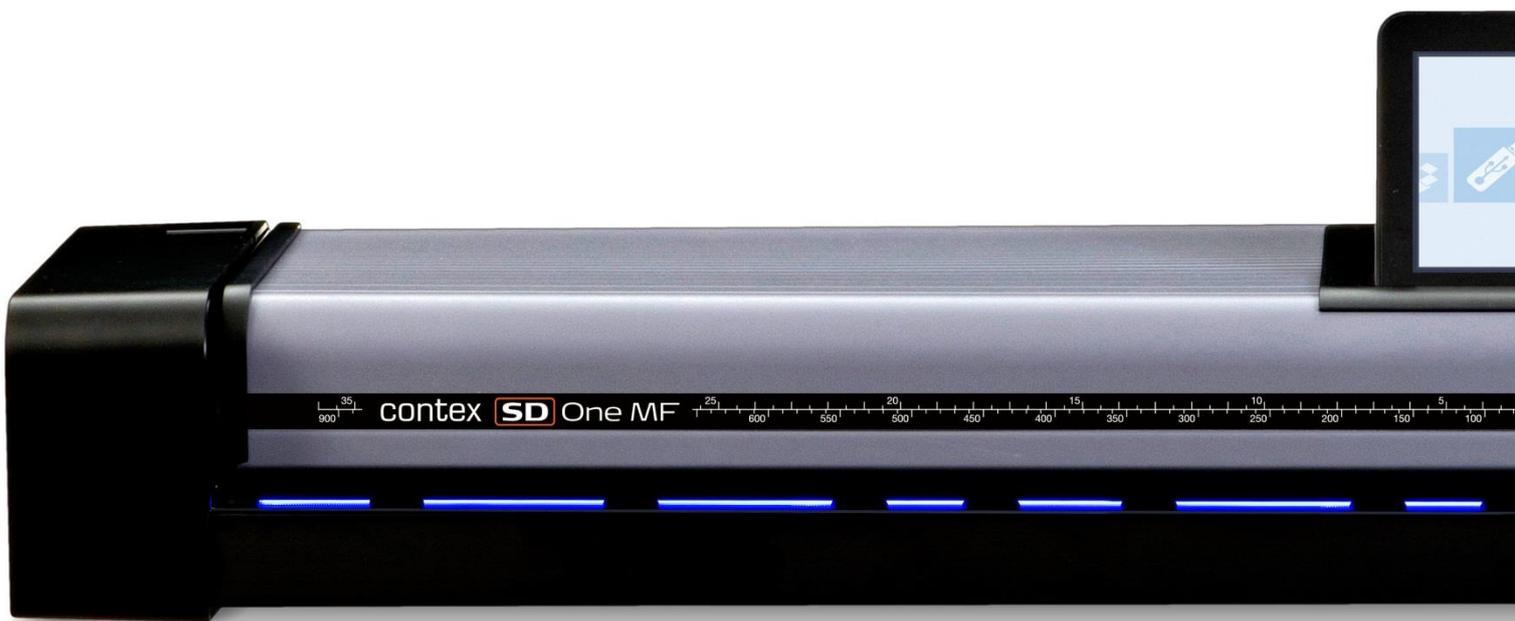

Contents

1. Information	3
Revision Table	3
Scanners covered by this Service Guide:	3
Design	4
Block Diagram	5
Wiring Diagram	6
Scanner Controller Board Layout (SUVA)	8
Power Supply (external).....	8
2. Troubleshooting	9
Troubleshooting Sequence	9
Troubleshooting	10
3. Part Replacement	11
Identifying Parts	12
Parts List	13
Raising CIS Bridge Unit	14
Belt tension (Motor).....	15
RHS & LHS Cover.....	16
Scanner Controller Board (SUVA)	17
CIS Element	21
CIS Cable	23
Paper and Lid Sensors.....	24
Stepper Motor Assy.....	26
Power Switch & Connector	28
Rear Panel Ethernet / USB Cable, Panel mount	30
Pressure Rollers.....	32
Damper for CIS Bridge.....	33
Touch Screen Control Panel	34
4. WIDEsystem Service, walk though	37
Erase Parameter block.....	43
Firmware Download, walk-through	45
5. Scanner Terms.....	48
6. Error Codes	61
7. Scanner License	73
Scanner License System, General	73
Main Board Replacement.....	74
Setting the Serial Number	77
Temporary Board Swap	79
Problem with Activation.....	79

1. Information

Revision Table

1.0	First release.	September 2016	GJV
1.1	Correct information about USB connections	August 2018	GJV
1.2	Corrected typing errors, and added missing information	January 2019	GJV
1.3	Corrected part number for DC Power Adapter '2853D132'	August 2019	GJV
1.4	Changed voltage information on the PSU	December 2019	GJV
1.5	Corrected USB cables part number	January 2021	GJV
1.6	Corrected errors in title and page reference	February 2022	GJV
2.0	Revamped Service Guide	April 2022	GJV
2.1	Add 'Setting the Serial Number' to SU board instructions	March 2023	GJV
2.2	Corrected mistyped SUVA description	February 2026	GJB

Document Title.: SD One MF Technical Service Guide

Doc. No.: FST/TSG/003

Prepared by.: GJB

Distribution.: St Ives, UK

Issue revision date.: 2.2 6th February 2026

Scanners covered by this Service Guide:

- SD One MF 24"
- SD One MF 36"
- SD One MF 44"

This service guide is for the SD One MF, and has been taken from the original SD One Service Guide. Most of the photos will still show the original SD One, as the models shares the same technics for replacing components.

This document is the property of Contex A/S. The data contained herein, in whole or in part, may not be duplicated, used or disclosed outside the Recipient for any purpose other than to conduct technical evaluation. This restriction does not limit the Recipients right to use information contained in the data if it is obtained from another source without restriction.

Design


Electronics.

- Block Diagram.
- Wiring Diagram.
- Circuit Board Layouts.
- Power Supply
- Scanner Controller Board Layout

Adjustments.

- Raising CIS Bridge Unit
- Belt tension.


Block Diagram

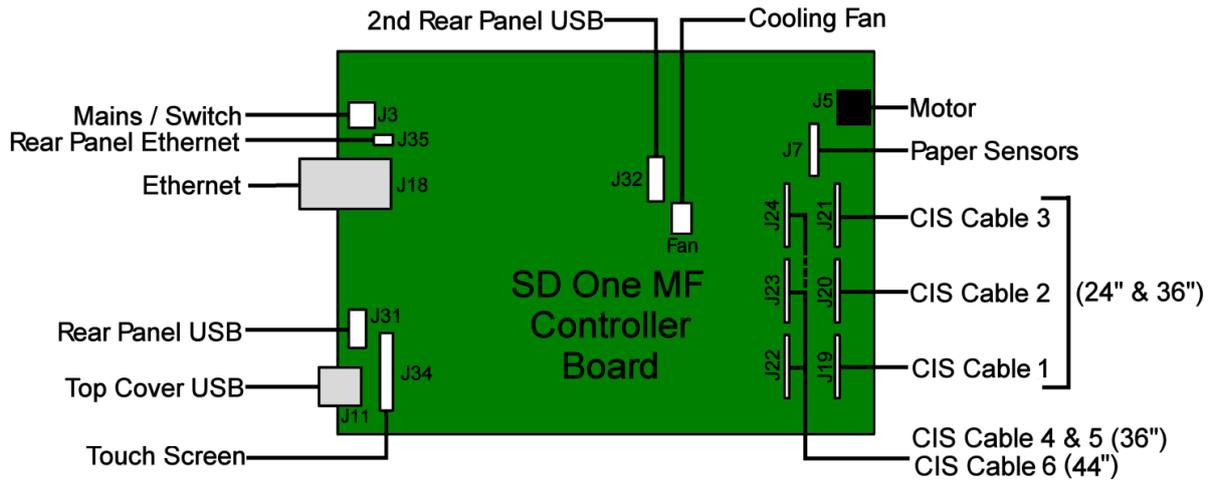

Rear Panel USB's are Type A connectors and used for outputting to a printer or connection to the Wi-Fi adapter.

Wiring Diagram


SD One MF 24

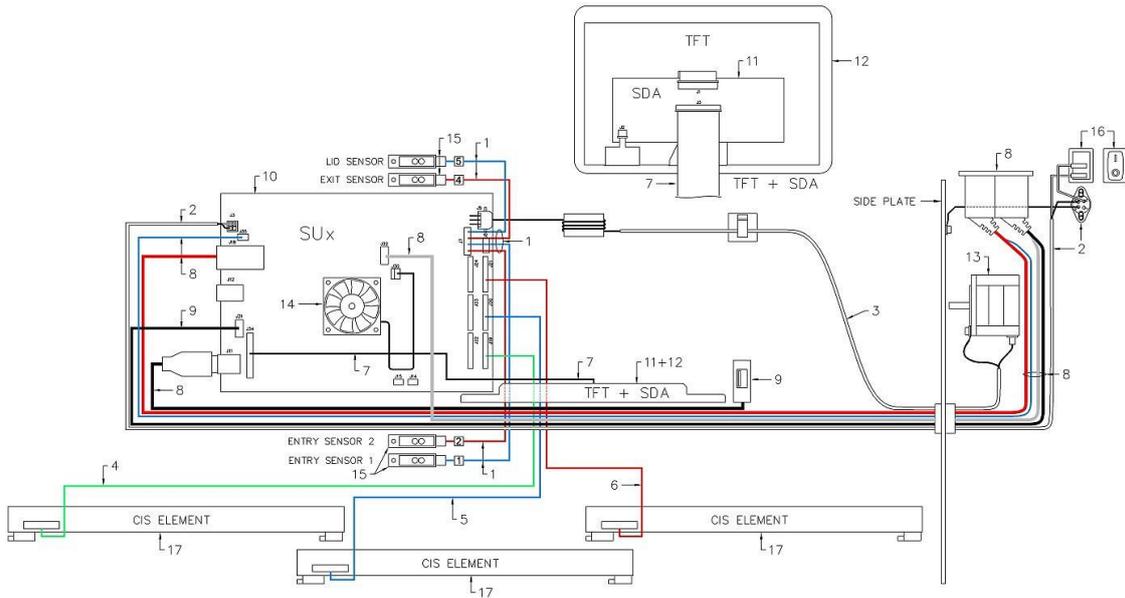

Pos. numbers refer to SWMG/PLS/002

Refer to SWM/INM/006 for further details on cable routing


SD One MF 36

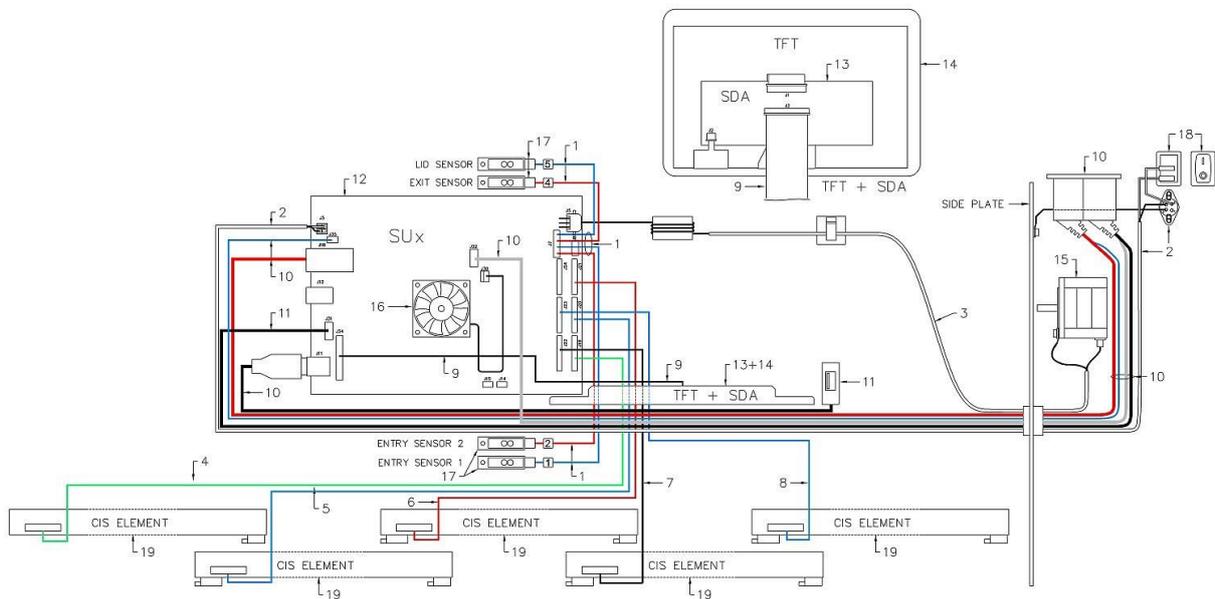

Pos. numbers refer to SWMG/PLS/001


Refer to SWM/INM/006 for further details on cable routing

SD One MF 44

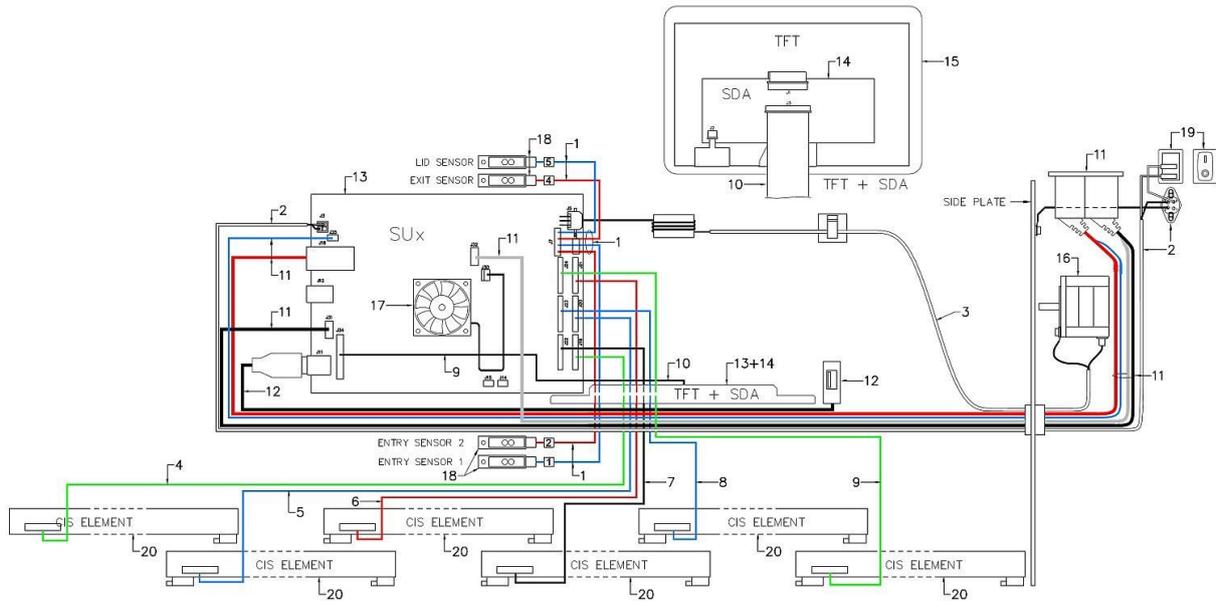

Pos. numbers refer to SWMG/PLS/003

Scanner Controller Board Layout (SUVA)

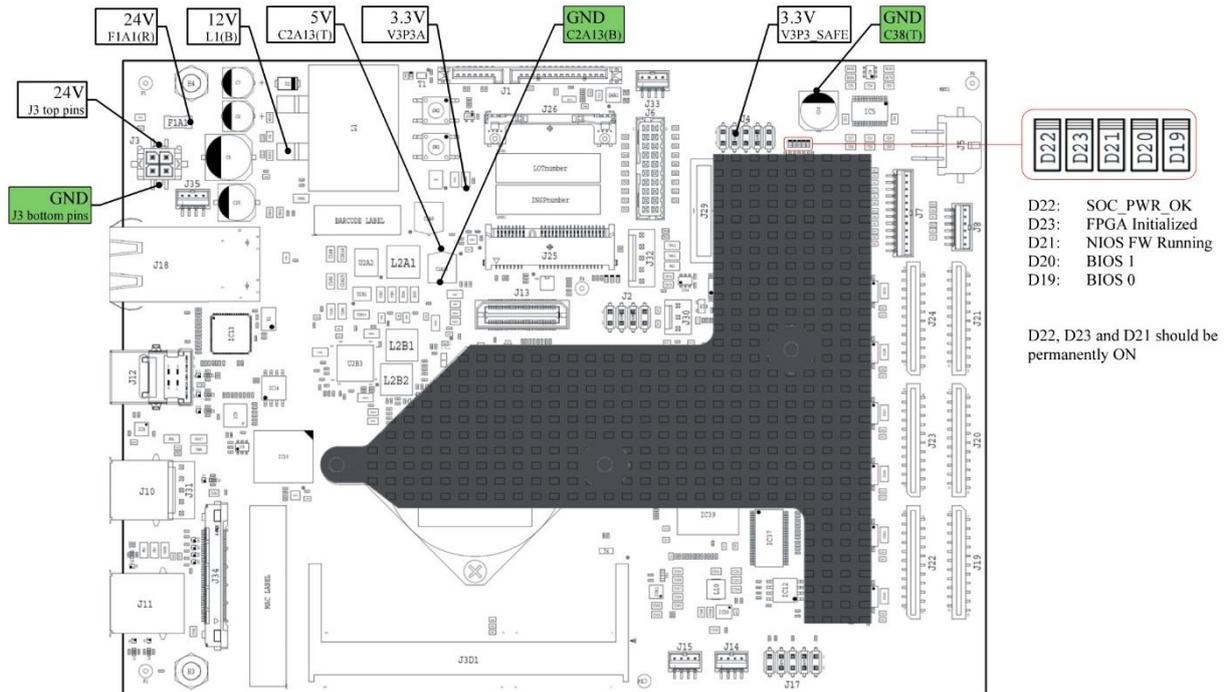

Power Supply (external)

- The External Power Supply has a built in surge protection feature, if the surge protection is triggered it will shut down for about 3 min before it will recover.
- The Power Supply is 19V DC.



2. Troubleshooting

Troubleshooting Sequence.

Image Quality problems.


Dust Related Errors.

Calibration Related Errors.

Crumpled or Folded Originals.


Troubleshooting Sequence

This is a suggested Troubleshooting Sequence and will work in most cases. There are always some grey zones, especially if the problem is related to image quality.

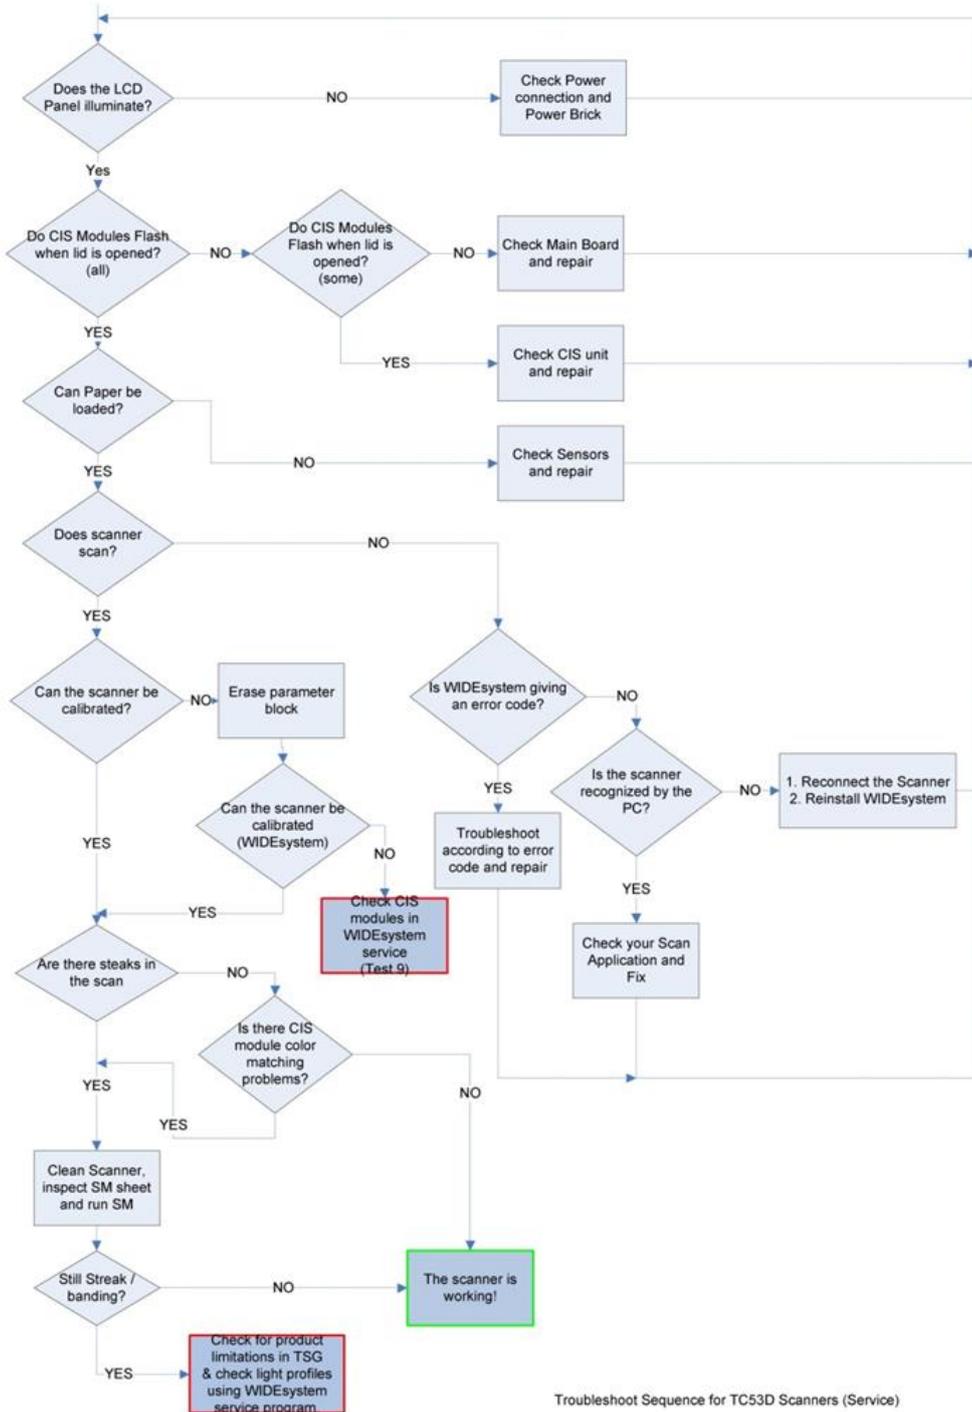

Troubleshoot Sequence for TC53D Scanners (Service)

Troubleshooting

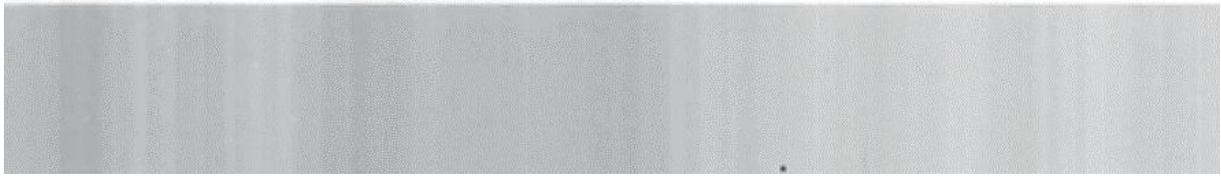

Banding Problems.

- Bad/no grey balance calibration (CIS module to module match).


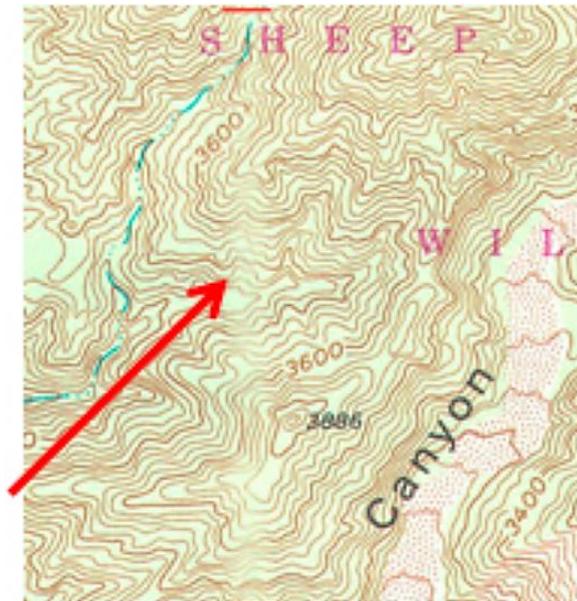



Image Quality Problems.

- Scanning originals that have folds or are crumpled on CIS scanners is often confused as a defect in the scanner, where it is actually a limitation of the technology used. Due to the very short distance from the sensor to the surface of the original, referred to as the "Focal Length", if the document does not stay in contact with the glass plate then it is very likely to be out of focus.

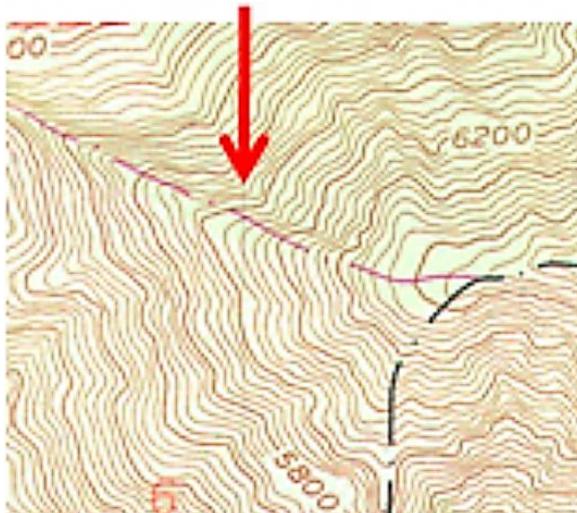

Dust Problems.

- There are image quality problems that are not related to HW errors. These could be due to insufficient cleaning, bad calibration or limitations in the CIS technology. Streaks running in the scan direction which seem to appear and disappear during the scan are most likely caused by dust. Clean the scanner and the original. The streaks are often a darker shade of color.

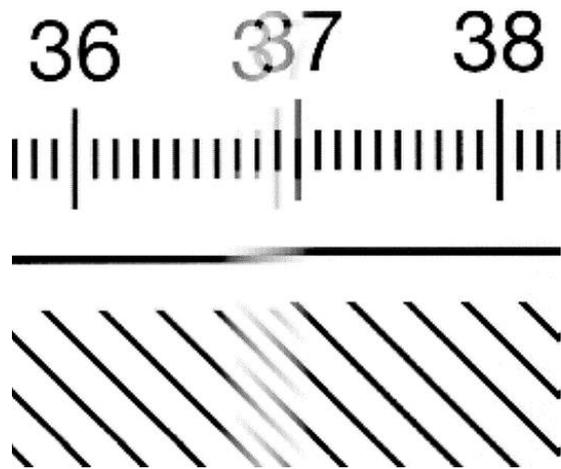

Stitching problem between 2 CIS modules

Stitching Problems.

- Other issues could be that the scanner simply needs to be calibrated, either because the parameter block has been erased, never been calibrated or that the scanner has been moved around.

3. Part Replacement

Identifying Parts.

Parts List.

Raising CIS Bridge Unit

Belt tension (Motor)

Electronics Scanner Controller Board (SUVA).

CIS Element.

CIS Cables.

Stepper Motor Assy.

Paper/ Lid Sensor.

USB Cable and Connector.

Power Switch and Connector.

Mechanics. RHS Cover.

LHS Cover.

Pressure Rollers.

Damper Assy for CIS Bridge.

Top Lid Cover (including Control Panel)

Common Hand Tools. Torx 10 Straight.

Torx 15 Straight.

Torx 20 Straight.

IMPORTANT Note!

Do not use power screwdrivers when working on the SD One MF, as these can operate with too much force and damage the screws and/or threads in panelling. Hand operated screwdrivers are the only ones recommended to use.

Identifying Parts

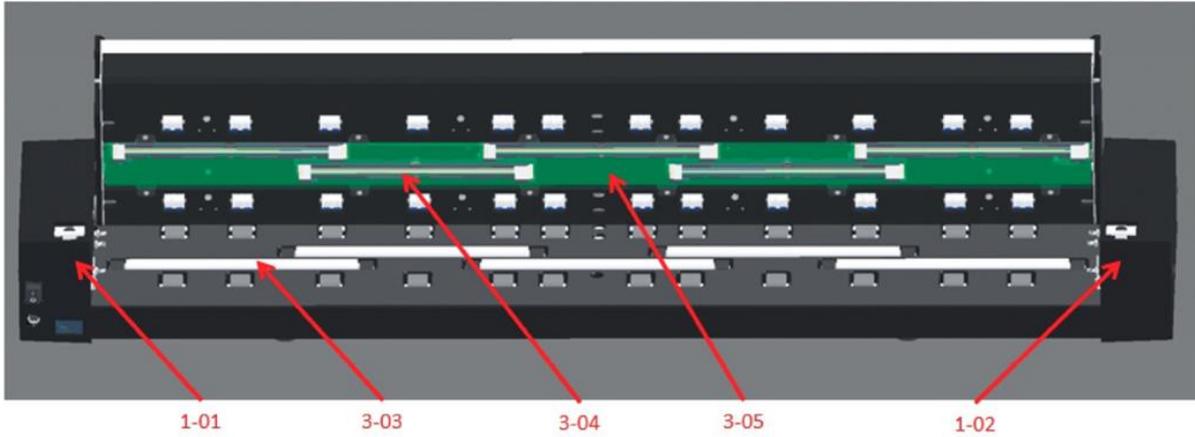


Figure 1
Rear view

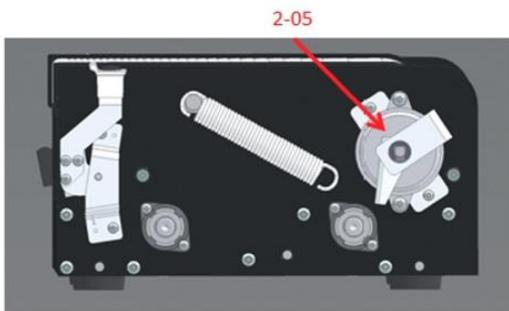
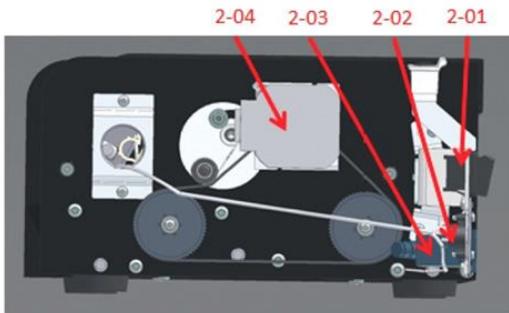


Figure 2
End views

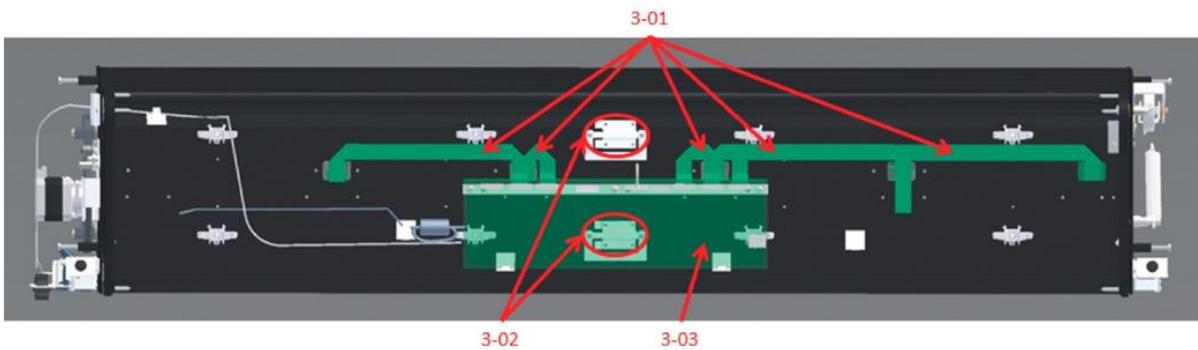


Figure 3
Top view

Parts List

Fig	Part no.	24"	36"	44"	Description
Service Parts					
3-03	2853D130	X	X	X	SUVA Controller Board (SD One MF)
3-02	0075A160R01	X	X	X	Paper/Lid Sensor (1 pcs.)
1-04	2853D105	X	X	X	CIS Element (1 pcs) (LSH1208)
3-01	2853D107	X			Cable Set for CIS Elements (3 pcs)(24")
3-01	2853D106		X		Cable Set for CIS Elements (5 pcs)(36")
3-01	2853D136			X	Cable Set for CIS Elements (6 pcs)(44")
2-01 & 2-02	2853D108	X			Power Inlet Assy, SD One MF 24
2-01 & 2-02	2853D109		X		Power Inlet Assy, SD One MF 36
2-01 & 2-02	2853D139			X	Power Inlet Assy, SD One MF 44
2-03	2853D141	X	X		USB2.0 Cable, Panel Mount
2-04	2853D104	X	X		Stepper Motor, STA-42D2014
2-05	2853D110	X	X		Damper Assy. for CIS Bridge, SD One MF
1-02	2853D111	X	X		LHS Cover, SD One MF
1-01	2853D112	X	X		RHS Cover, SD One MF
-	2853D131	X	X	X	Touch Screen (SD One MF 24, 36 & 44)

Consumable's & Customer replaceable parts					
1-05	5229D014R01	X			Glass Plate, 24"
1-05	5398A008		X		Glass Plate, 36"
1-05	5229A005R01			X	Glass Plate, 44"
1-03	2853D115	X			Pressure Rollers (SD One)(3 pcs)
1-03	2853D116		X		Pressure Rollers (SD One)(5 pcs)
1-03	2853D140			X	Pressure Rollers (SD One)(6 pcs)
N/A	2853D113	X			Calibration Sheet, SD One MF 24
	2853D114		X		Calibration Sheet, SD One MF 36
	2853D144			X	Calibration Sheet, SD One MF 44
	2853D132	X	X	X	DC Adapter, SD One MF

Raising CIS Bridge Unit

- Tools: • T20 Torx Screwdriver.
Prerequisites: • Switch power off.



1. Depress the latch levers at both ends of the scanner.




2. Raise the CIS Bridge Unit.

Note:


Close by pressing down on the CIS Bridge Unit until the latches click shut at both ends

Belt tension (Motor)

- Tools:
- T15 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.
 - Remove RHS cover, see page 16.

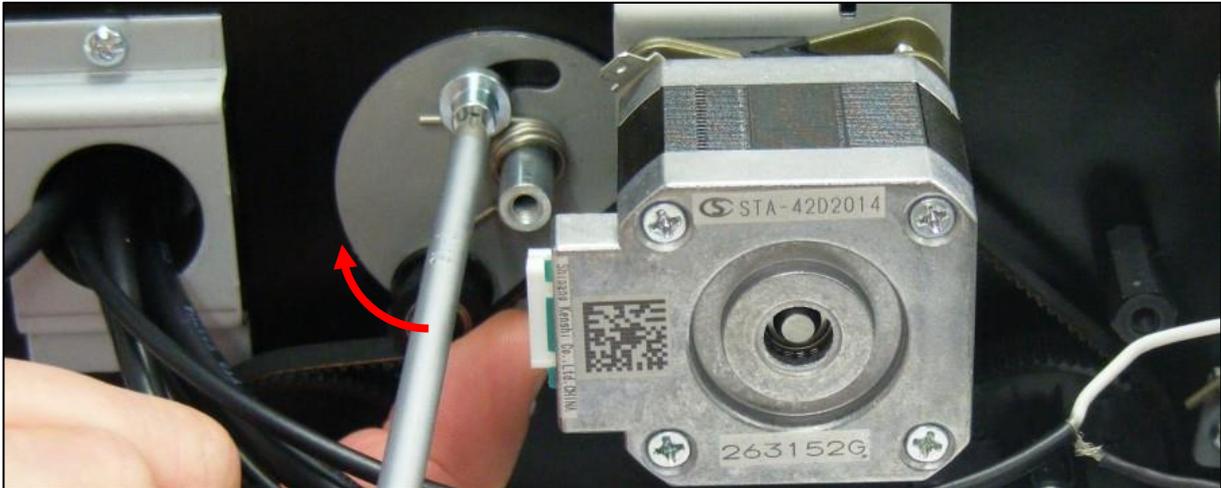

1. To loosen the belt, loosen the Locking screw.
2. Rotate the drive shaft to remove pressure on the belt.
3. Tighten the locking screw.

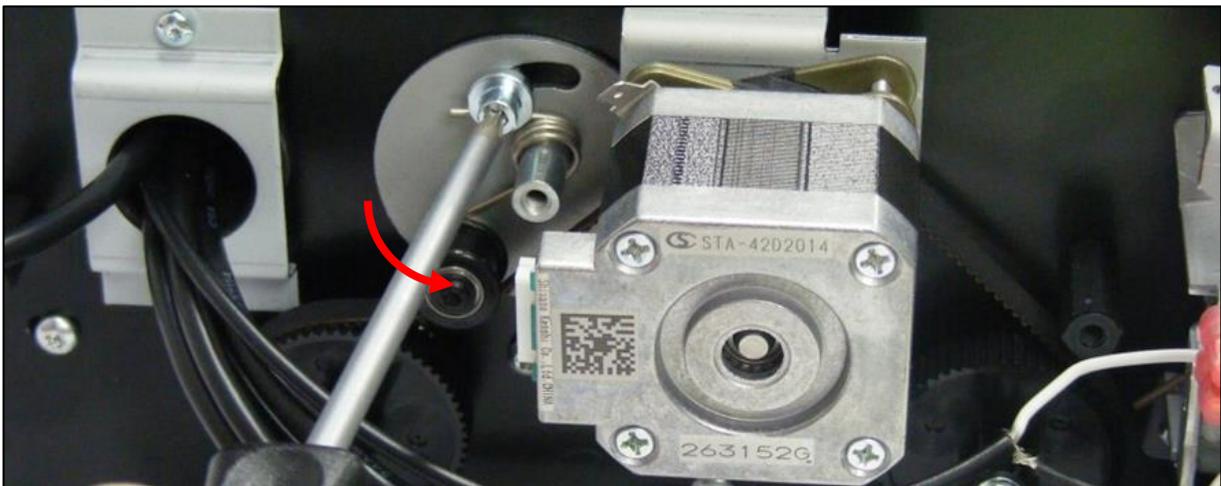


4. To tighten the belt, loosen the locking screw and allow the shaft to take its own position against the belt.
5. Retighten the locking screw afterwards
6. Refit the Cover

RHS & LHS Cover


- Tools:
- T20 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Disconnect the USB & Mains cable.

NOTE:

The procedure of removing the covers is the same for both the Right Hand Side (RHS) & Left Hand Side (LHS).

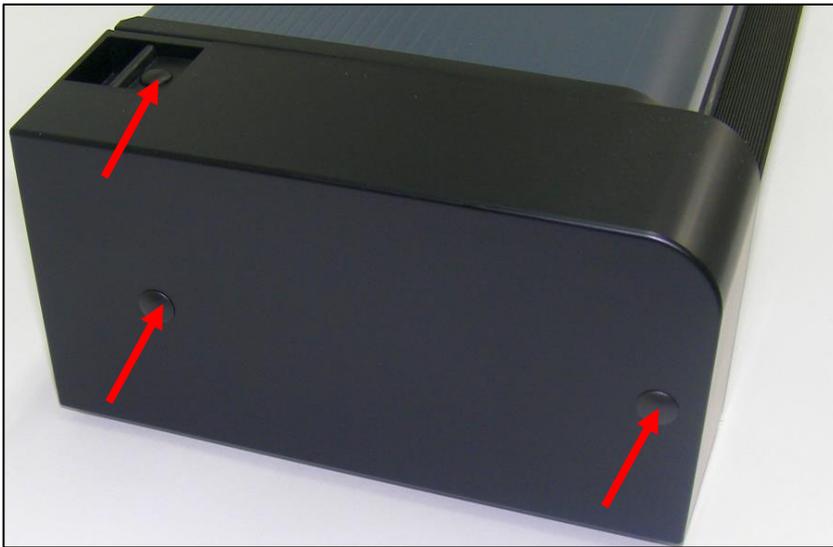

1. Remove plastic screw covers.

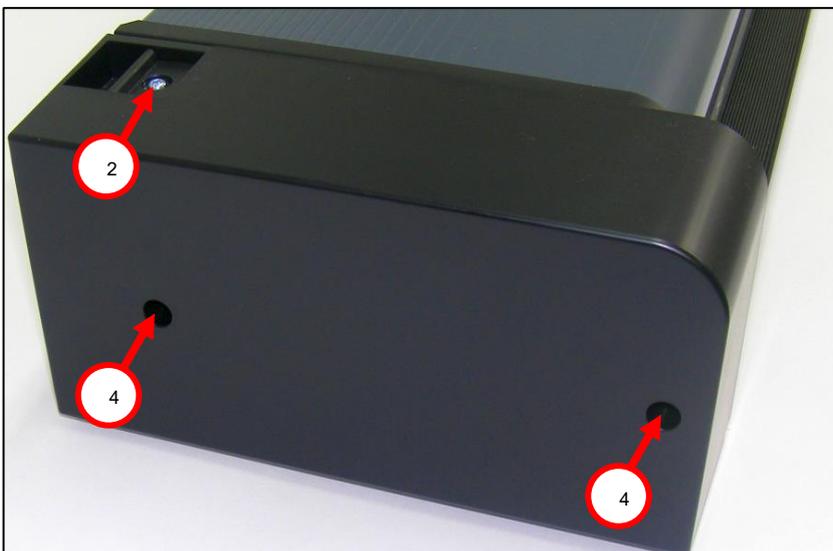


2. Remove handle screw (T20).
3. Remove handle.
4. Remove cover screws.
5. Remove cover.

Scanner Controller Board (SUVA)


- Tools:
- T20 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.




1. Raise the Touch Screen, remove the plastic screw covers, and remove the 2 screws.

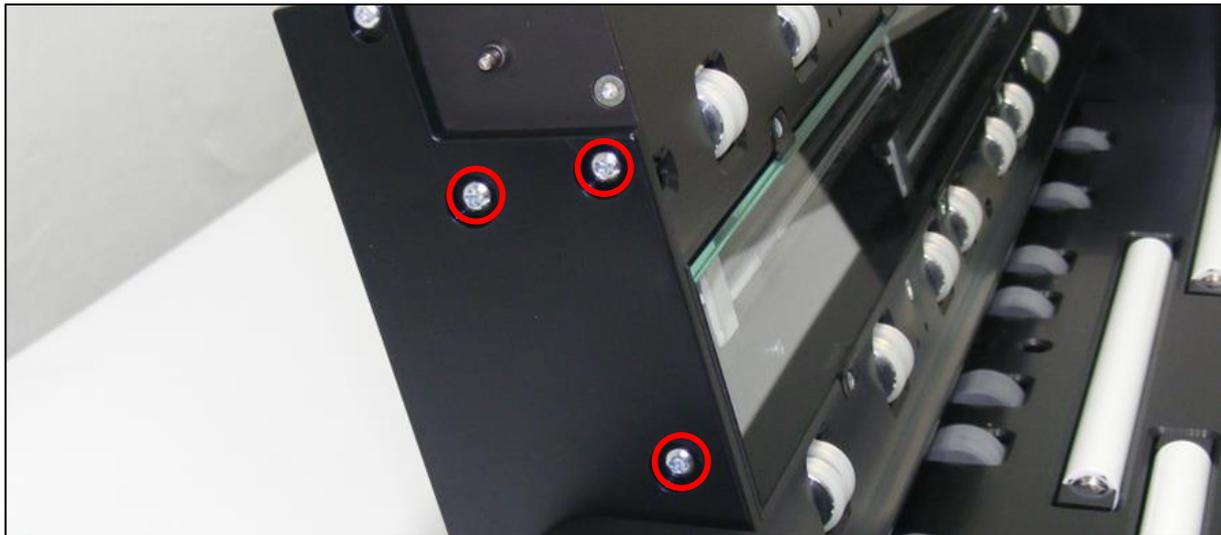


2. Remove screws (3 x T20) in both ends of the CIS bridge.
3. Open the CIS Bridge.

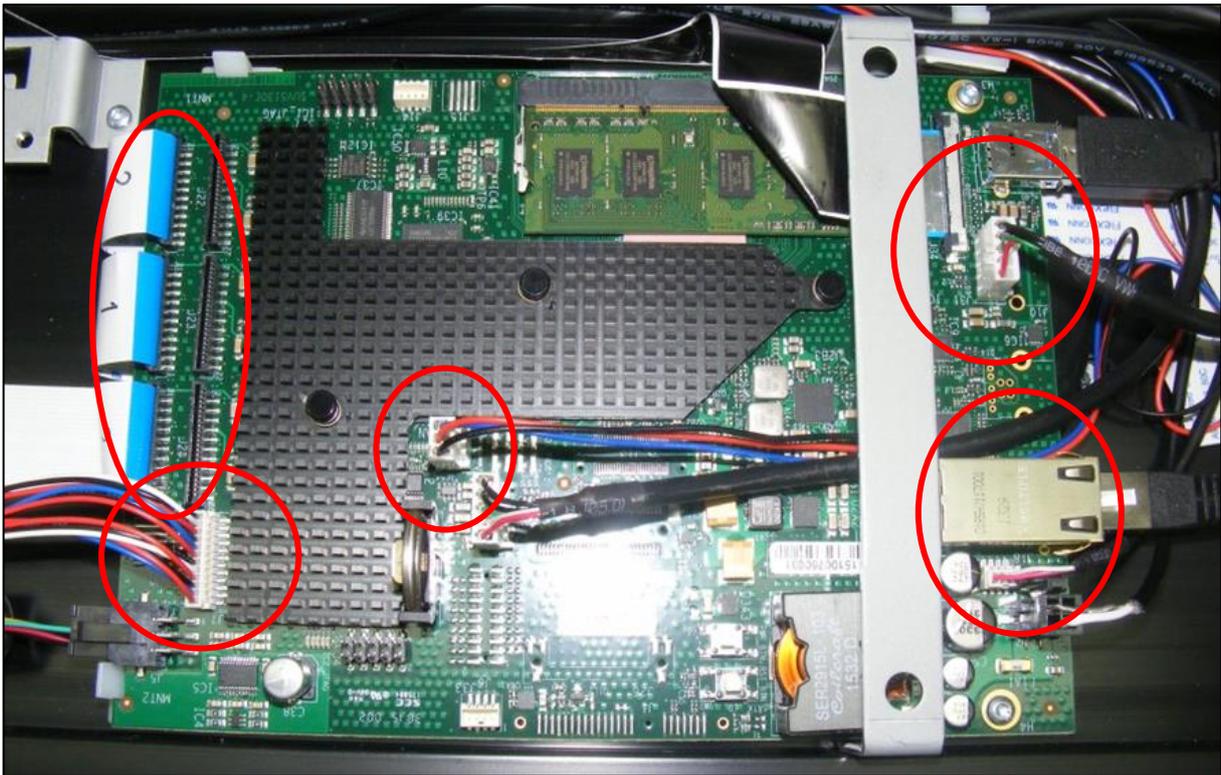


4. Disconnect CIS ribbon cables (see item 7 below).
5. Disconnect the cables.
6. Disconnect the Touch Screen cable (see item 8 below)

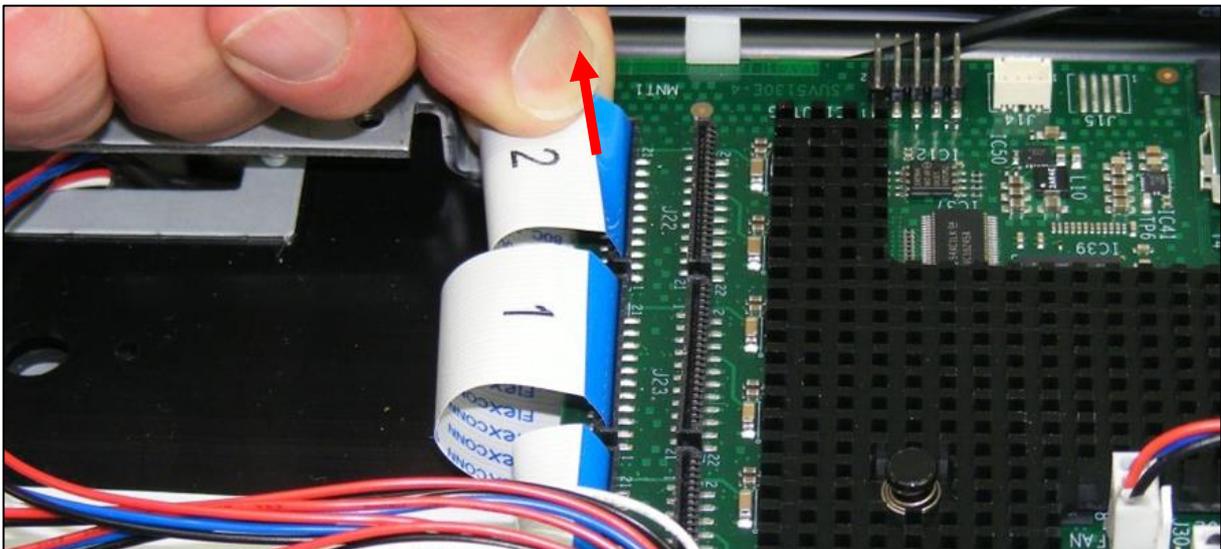


7. Gentle pull the ribbon cable up to remove.

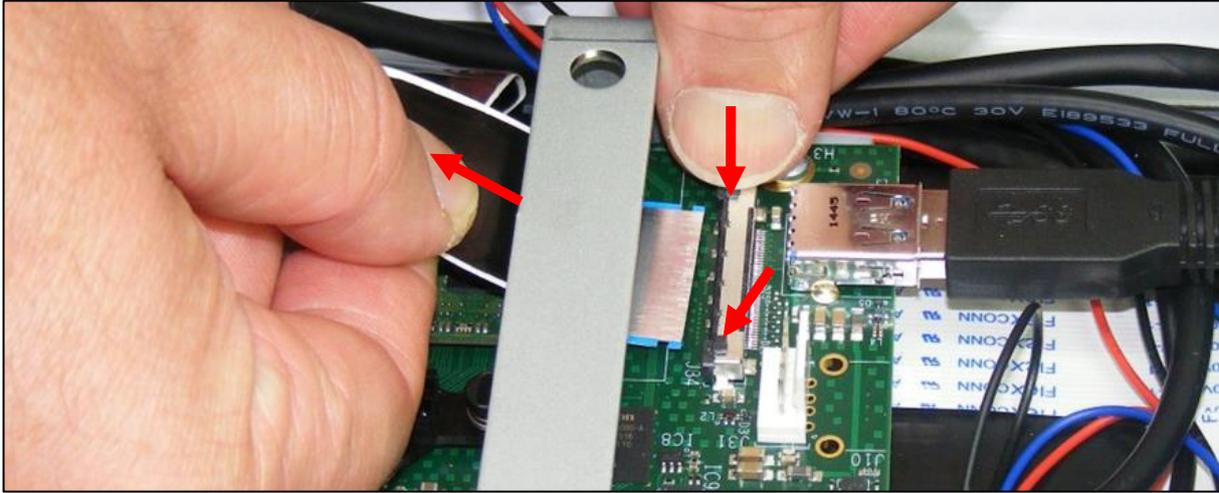

8. To release the Touch Screen ribbon cable, press down on both release buttons on the connector, while pulling the ribbon cable out of the connector.
9. Refit by pushing the ribbon cable into the connector while pressing down on the release buttons. Press in until the cable clicks in place.

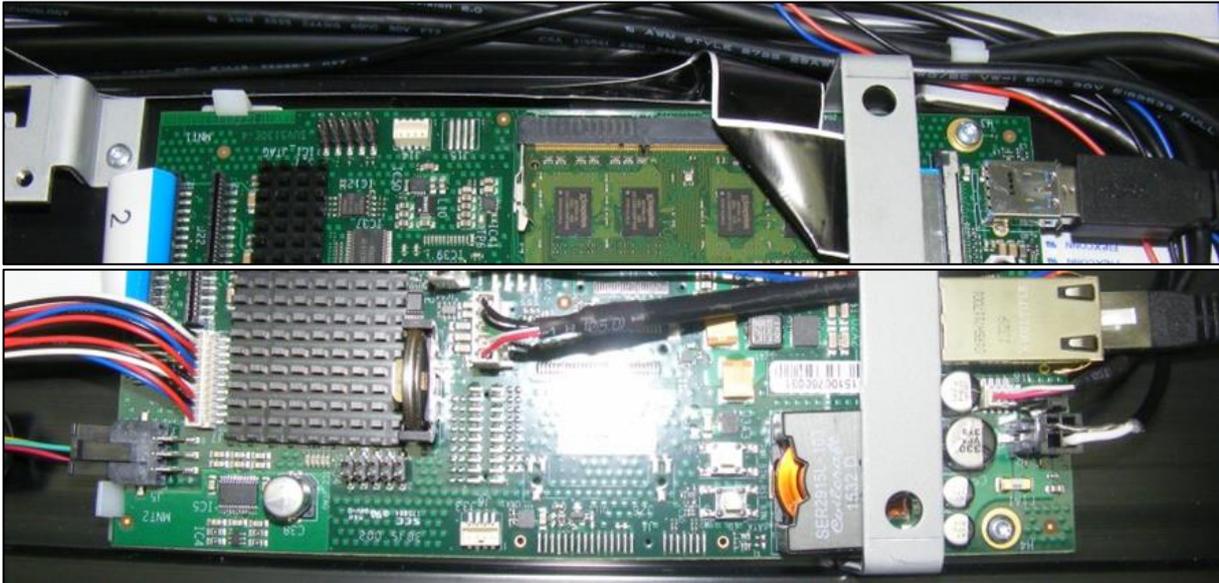


10. Remove the screws (2 x T10).
11. Lift out the board from under the retaining clips, and from under the metal bar.
12. Replace the Scanner Controller board and the reverse the steps, making sure all the cables connectors are correctly positioned and making good contact.

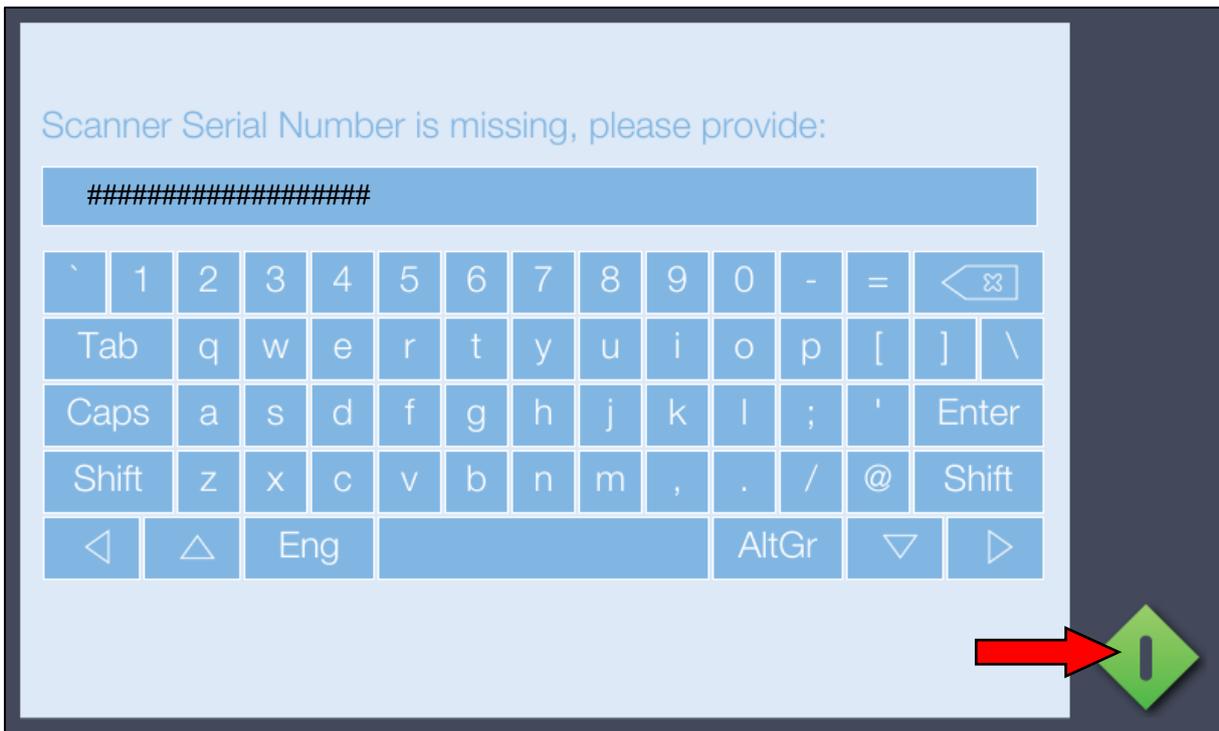


13. If a brand new Controller Board is fitted, enter the serial number that is displayed on the rear of the scanner. Press the Green Scan button after entering the information (DO NOT press return)
14. If a Controller board is being re-used, and is not new, please go to 'Setting the Serial Number' page 77.
15. The Controller board will probably boot up as "Not Activated". See page 74 for further instructions on how to reactivate the scanner.
16. Since it's a new board it does not hold any calibration data and will therefore need to be calibrated.

CIS Element


- Tools:
- T10 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.

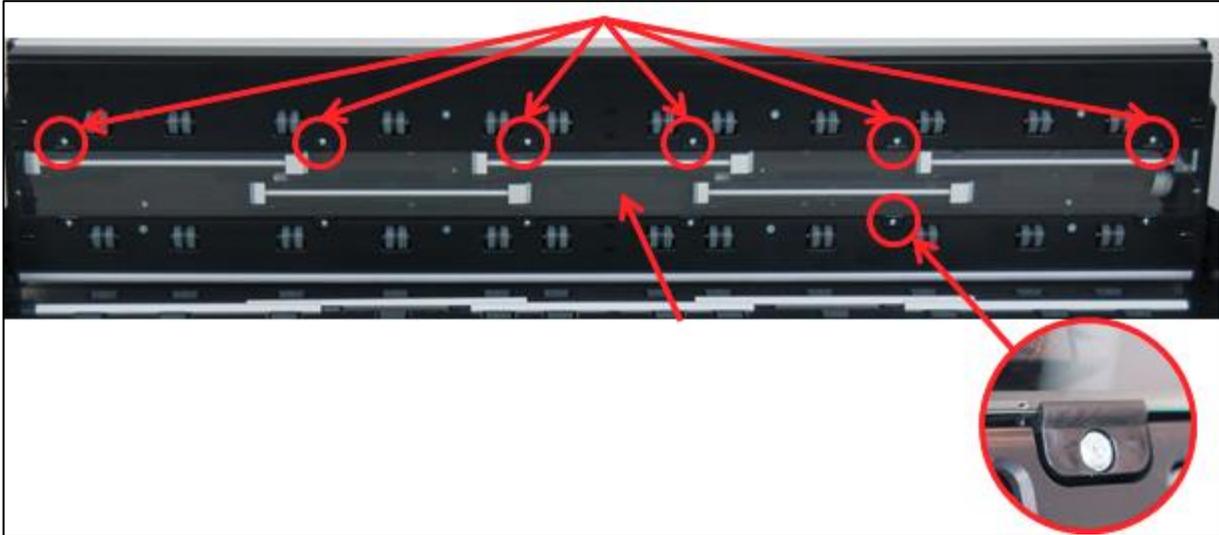

1. Remove screws and bracket.
2. Remove the glass plate by holding on to each end without touching the backside.

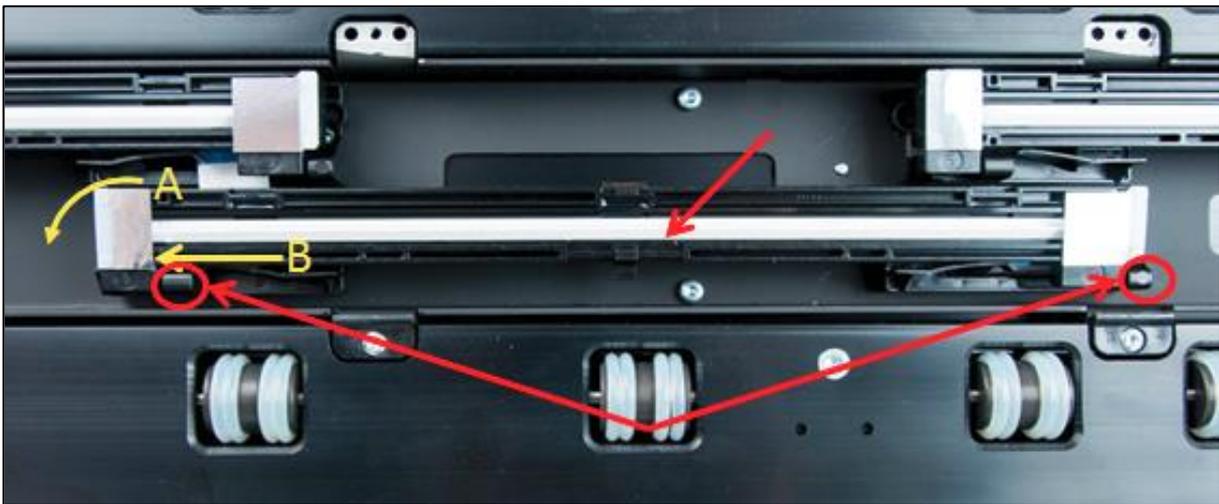

3. Carefully flip the CIS Element forward (A) and slide it to the Left (B).
4. Once free of the hinges lift out the CIS Element.

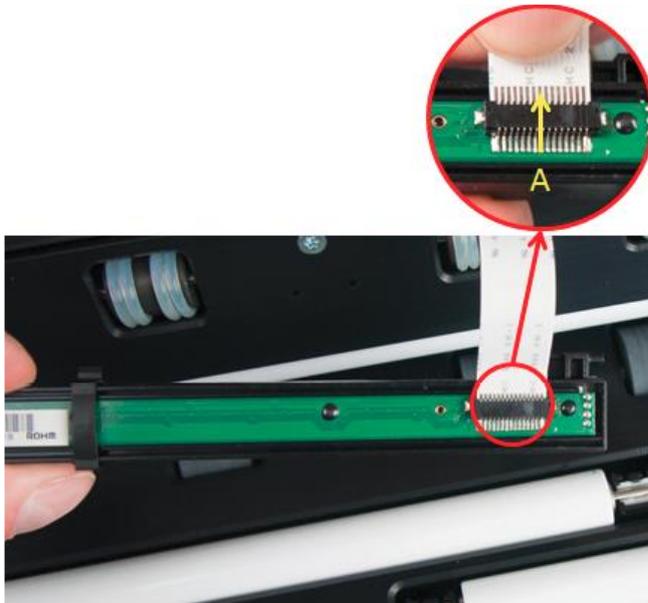

5. Carefully disconnect the ribbon cable by making a straight pull (A) on the cable as close to the connector as possible

6. Replace the CIS Element and cables in the reverse order.

NOTE:


- Do ***NOT*** touch the surface of the CIS Element.
- When re-inserting the glass plate, ensure the edge of the glass is properly seated under the bracket.
- When reconnecting the ribbon cables, make sure to use a straight / aligned push until fully in place.

Post actions:

After replacing CIS element, the scanner needs to be Calibrated

CIS Cable

- Tools:
- T10 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.

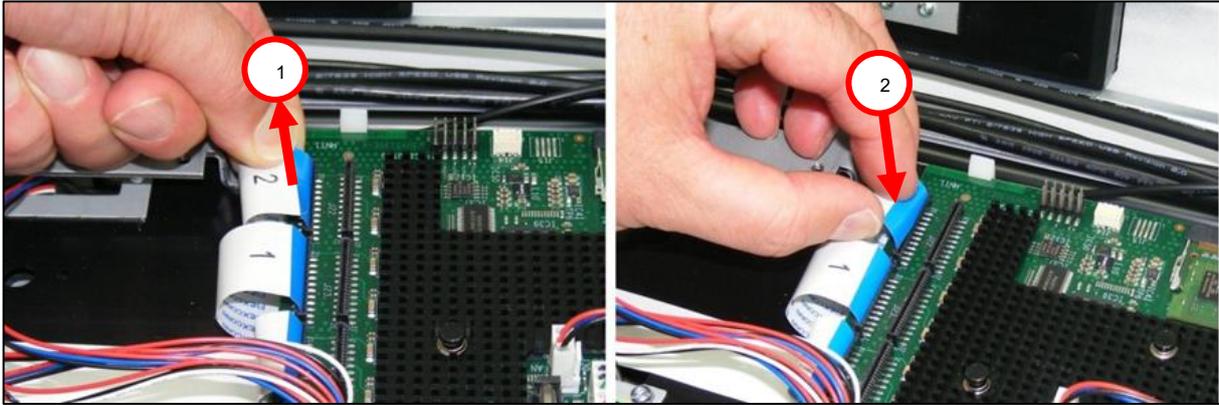


1. To release the ribbon cable, gently pull upwards.
2. To refit the ribbon cable, line the cable the correct way around, centrally to the connector, and press fit in. Do not apply so much pressure that the cable is folded over, as this can damage the wire core.


Paper and Lid Sensors

- Tools:
- T10 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.

For Load and Paper sensors:

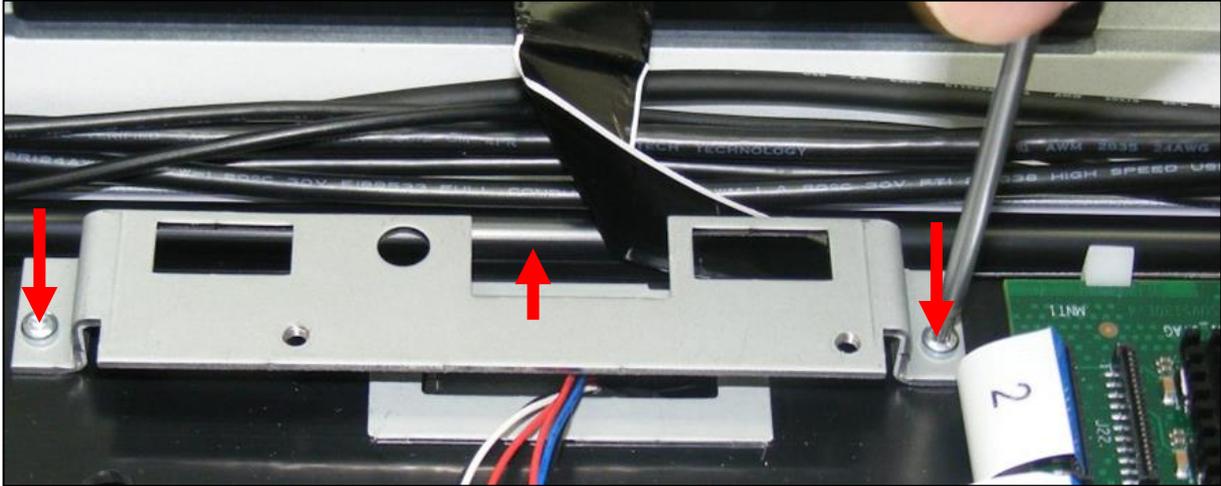

1. Remove the bracket from over the front sensors.

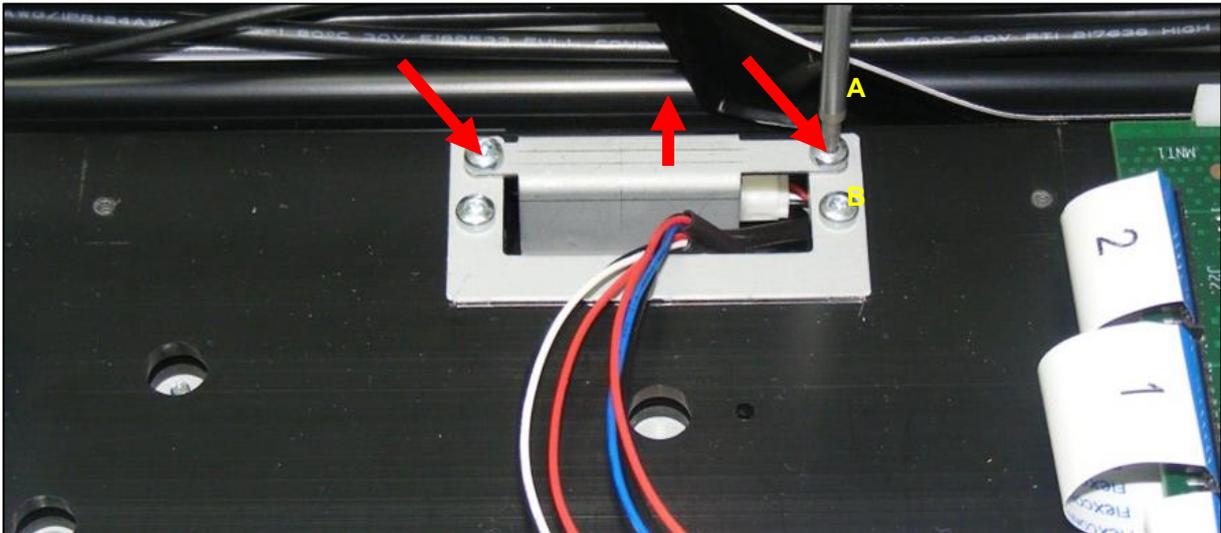


2. Remove screws (2xT10).
3. Lift out sensor bracket.

A = Load Sensor.

B = Paper Sensor.


For Lid and Exit sensor:

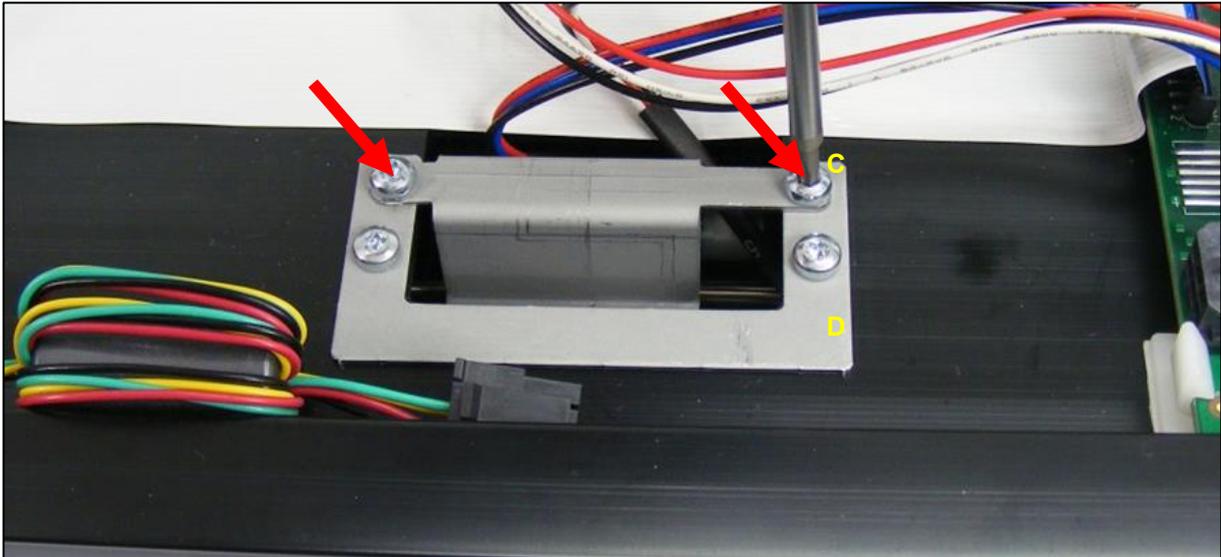

4. Remove screws (2xT10).
5. Lift out sensor bracket.

C = Exit Sensor


D = Lid Sensor

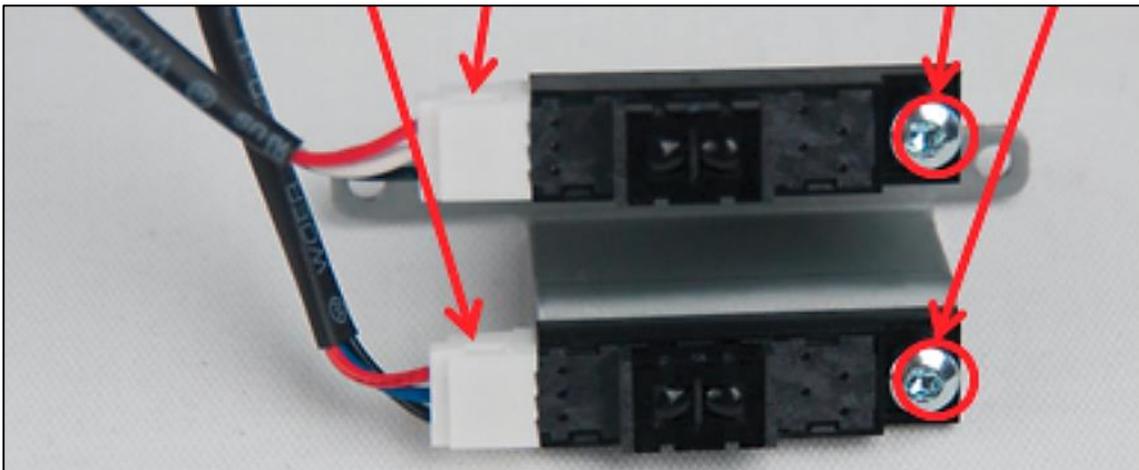

6. Disconnect the sensor cable.
7. Remove the screw and sensor.


Stepper Motor Assy

- Tools:
- T10 Torx Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.
 - Remove RHS cover, see page 16.

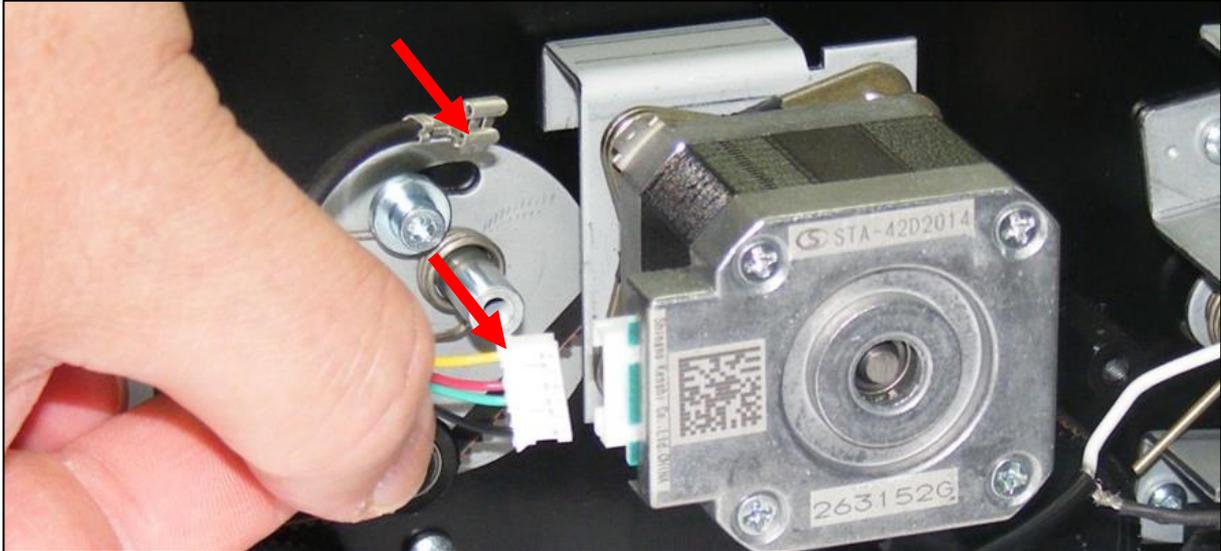


1. Disconnect motor cables.

Release belt tension:

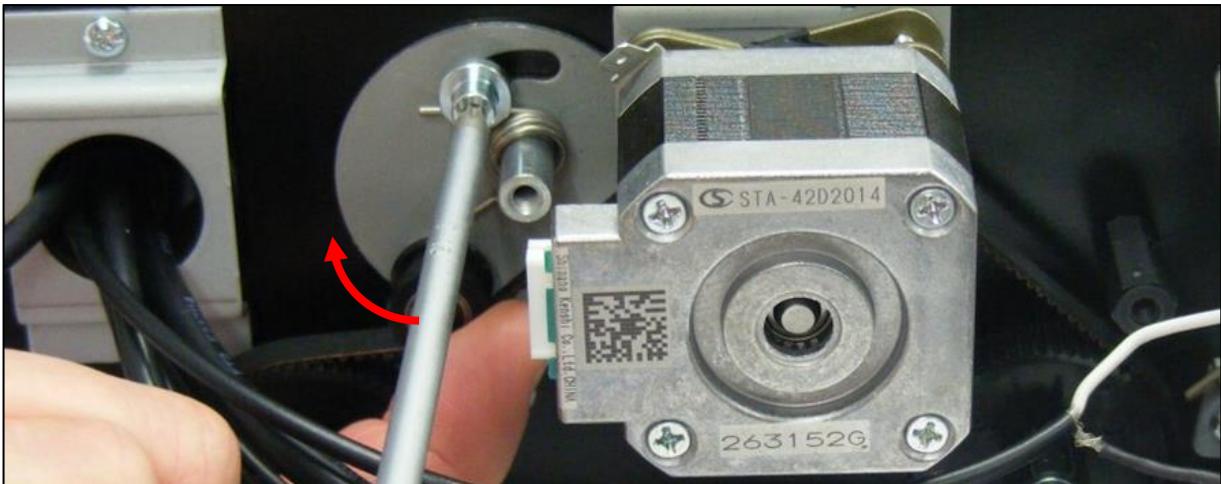


2. Loosen locking screw (don't remove).
3. Push tension wheel upwards.
4. And tighten locking screw again.

Remove Motor Assy:

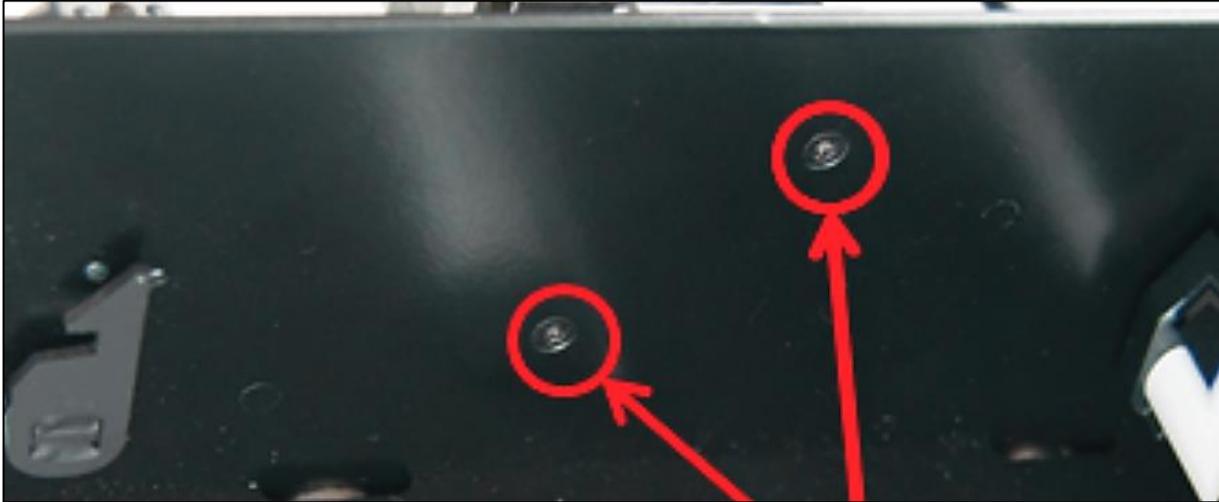

5. Remove screw (2xT10) while holding the Motor Assy.

Remove Motor Bracket:

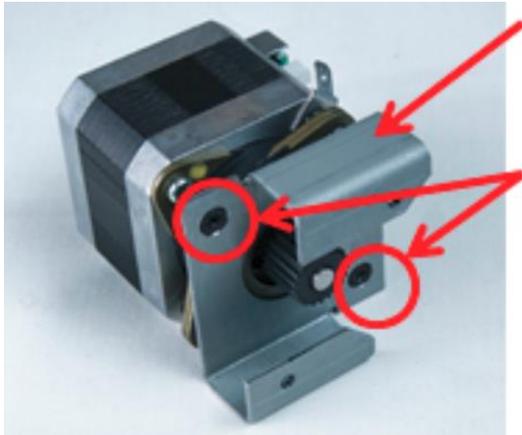

6. Remove screws (2xT10).
7. Remove bracket from assy.
8. Remove screws (2xT10).


9. Replace the motor and reverse order.

Power Switch & Connector


- Tools:
- Flat Screwdriver.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.
 - Remove LHS cover, see page 16.




1. Disconnect the Power cable.

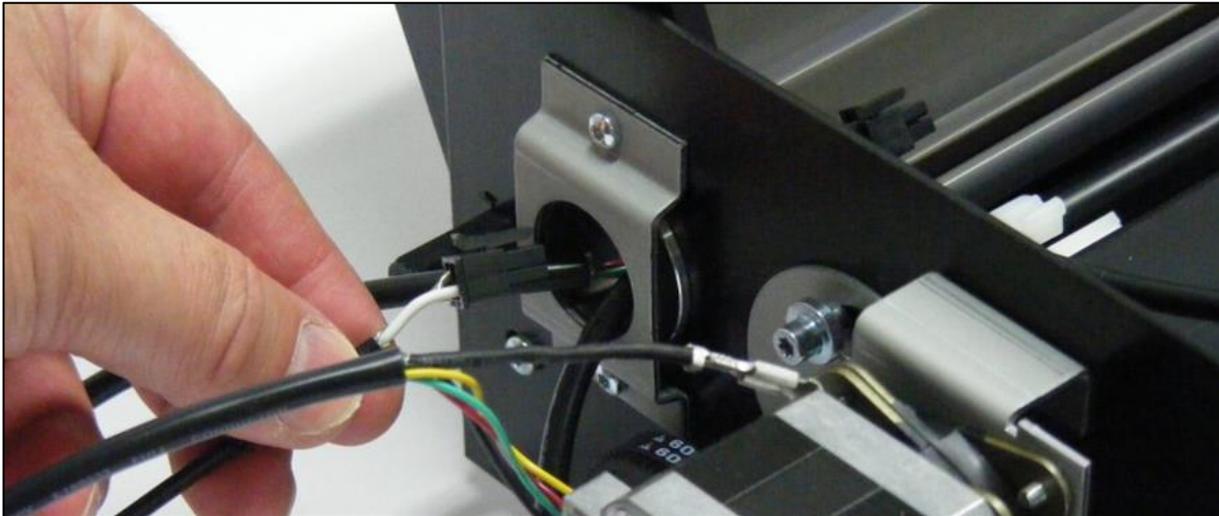

2. Guide the cable carefully out though the hole.

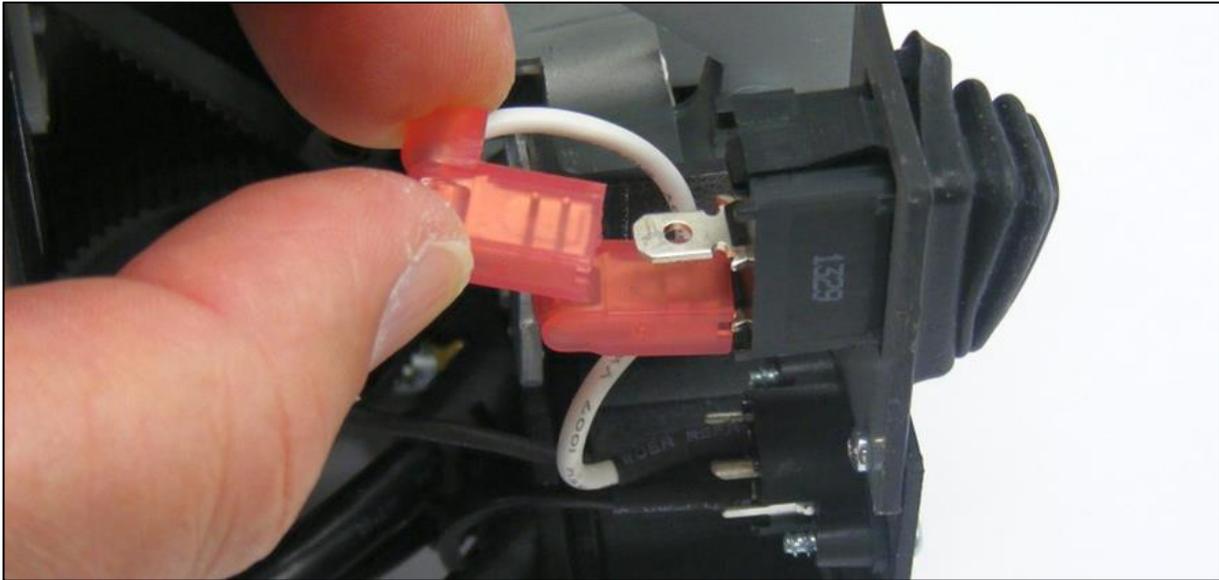

3. Disconnect the cables on the switch.
4. Remove screw for ground cable.
5. Remove screws for power connector (2xT10) and remove the connector.

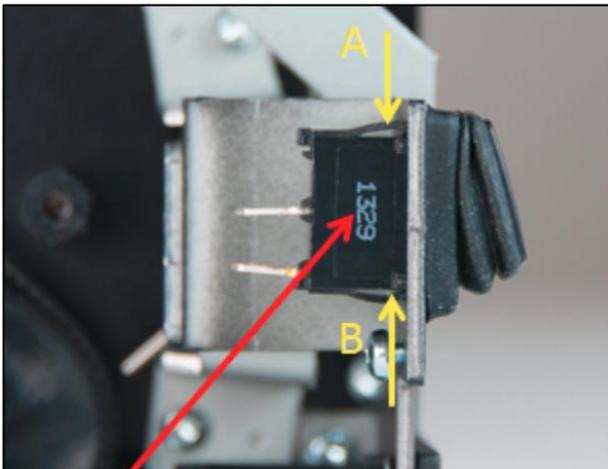

6. Push A and B towards each other and carefully remove the switch out though the back plate.


Note:

Use a flat screwdriver to push the tabs on the power switch if necessary.


7. Replace the switch and connector and reverse the steps.

Rear Panel Ethernet / USB Cable, Panel mount


- Tools:
- None required.
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.
 - Remove LHS cover, see page 16.

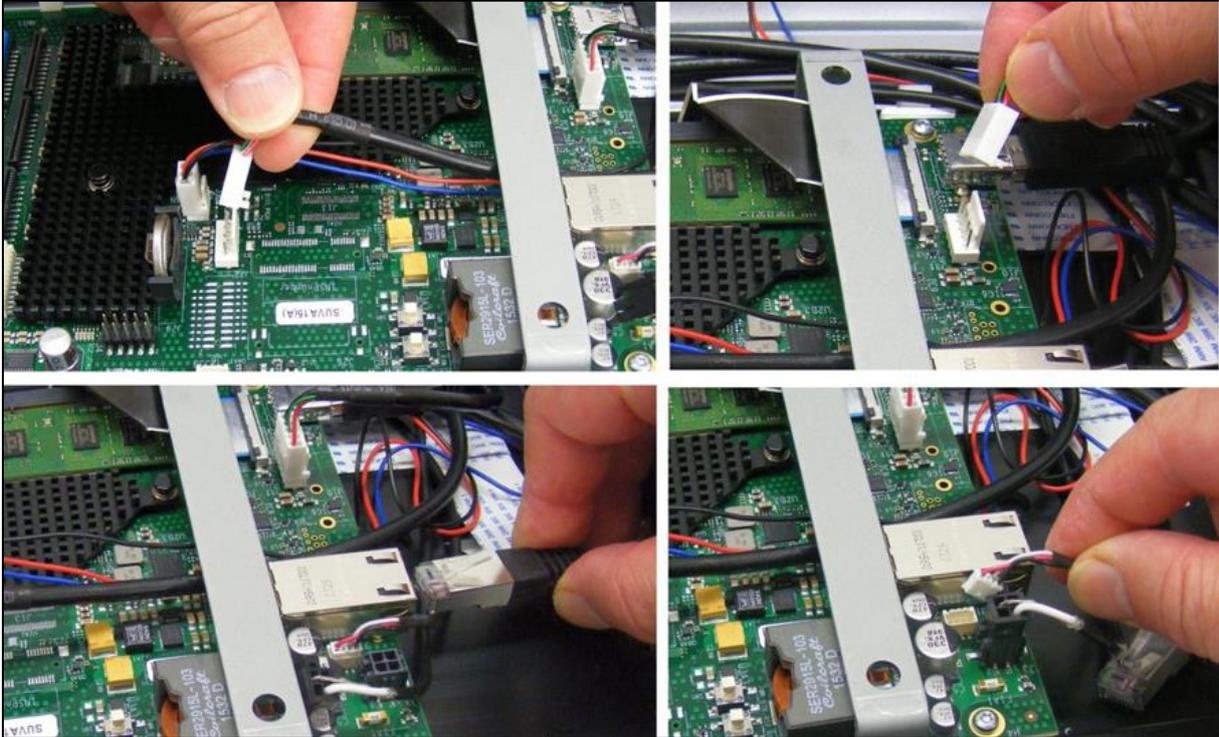


1. Disconnect the 4 cables to the Ethernet / USB cable.

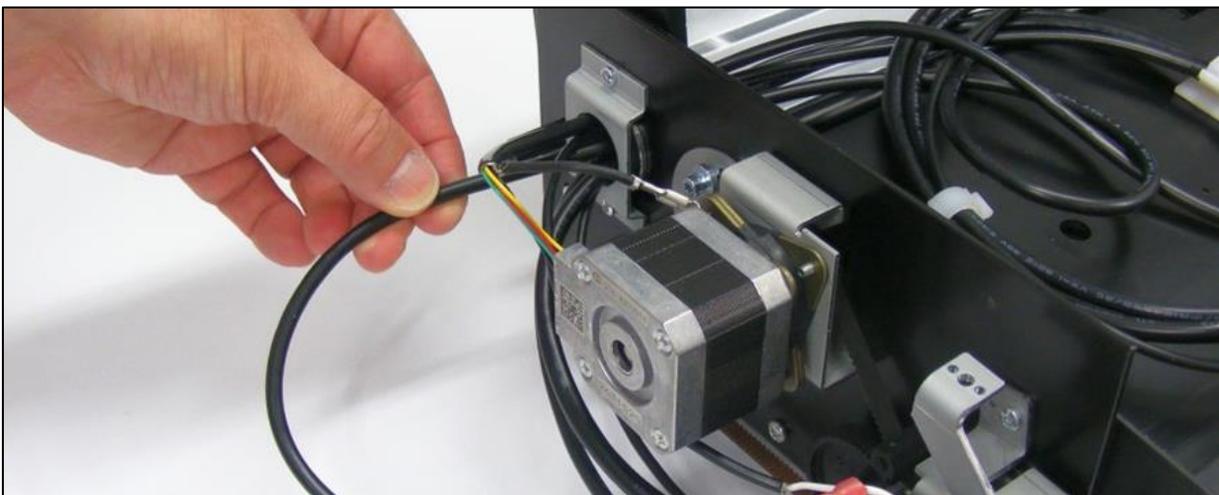

2. Guide the cables carefully out though the hole

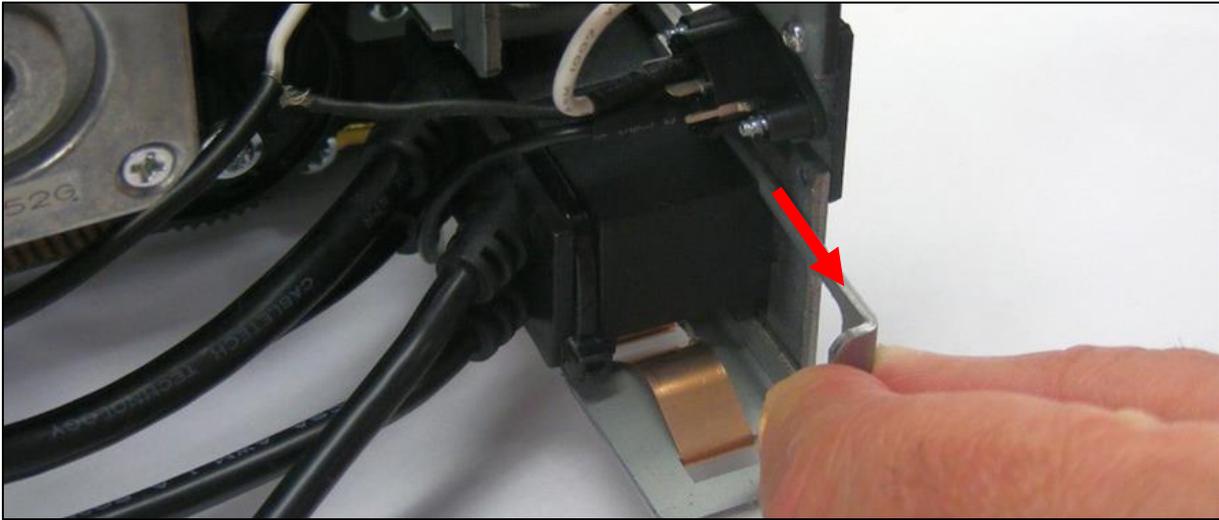

3. Remove the locking bracket from the Ethernet / USB connector by sliding it across and out.

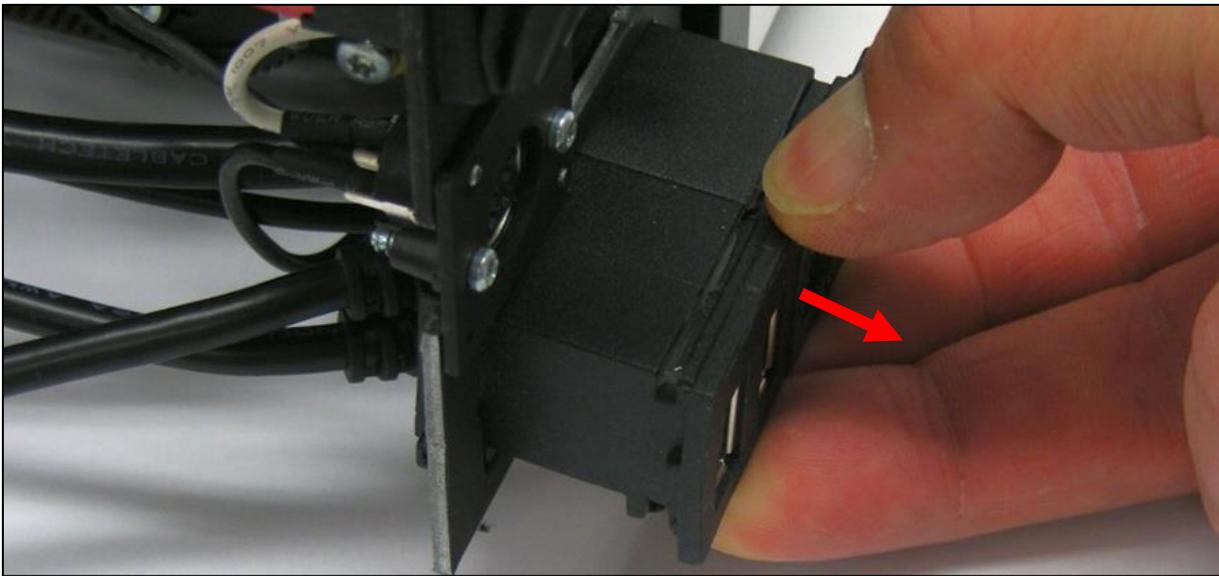

4. Remove the Ethernet / USB connector and cables out through the panel.
5. Replace the Ethernet / USB connector and reverse the steps.

Pressure Rollers

- Tools:
- Flat Screwdriver
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.




1. Use a flat screwdriver to prise the cap off the end of the roller.
2. Repeat at other end and for all Pressure Rollers



3. Carefully use a screwdriver to click pressure roller out of pressure foot.
4. Lift the roller completely out of the chassis
5. Refit in the reverse order.

Damper for CIS Bridge

- Tools:
- T10 Torx Screwdriver
 - T20 Torx Screwdriver
- Prerequisites:
- Switch power off.
 - Raise CIS Bridge Unit as shown on page 14.
 - Remove LHS cover, see page 16.

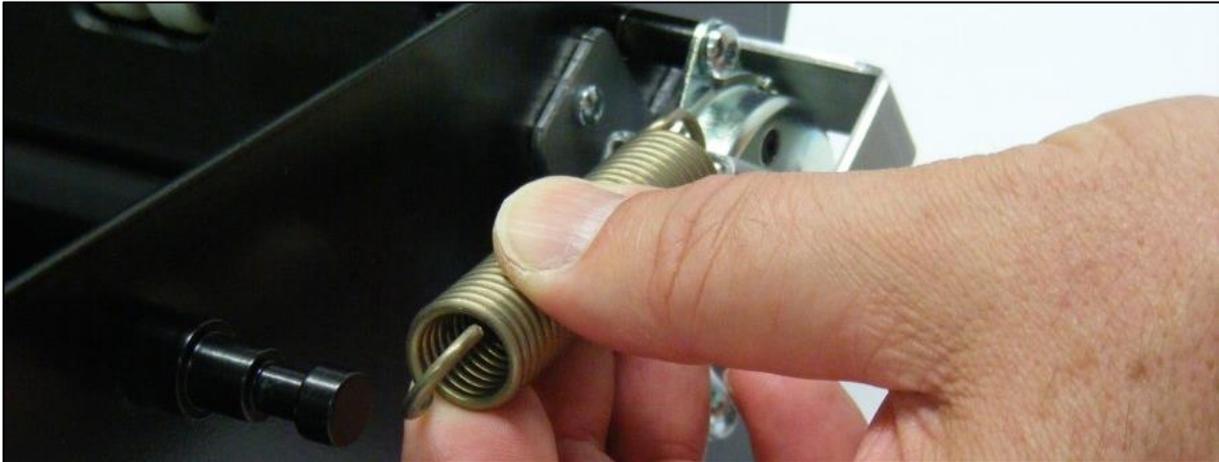

1. Remove the spring.
2. Pull the spring over rod




3. Remove screws to release clamp and remove the clamp.



4. Remove the 2 x T20 screws, and the 2 x T10 screws.
5. Pull out Damper Assy. While holding the CIS bridge cover
6. Replace the Damper Assy in the reverse order. Do not forget to tighten the clamp.

Touch Screen Control Panel


- Tools: • T6 Torx Screwdriver.
- Prerequisites: • Switch power off.

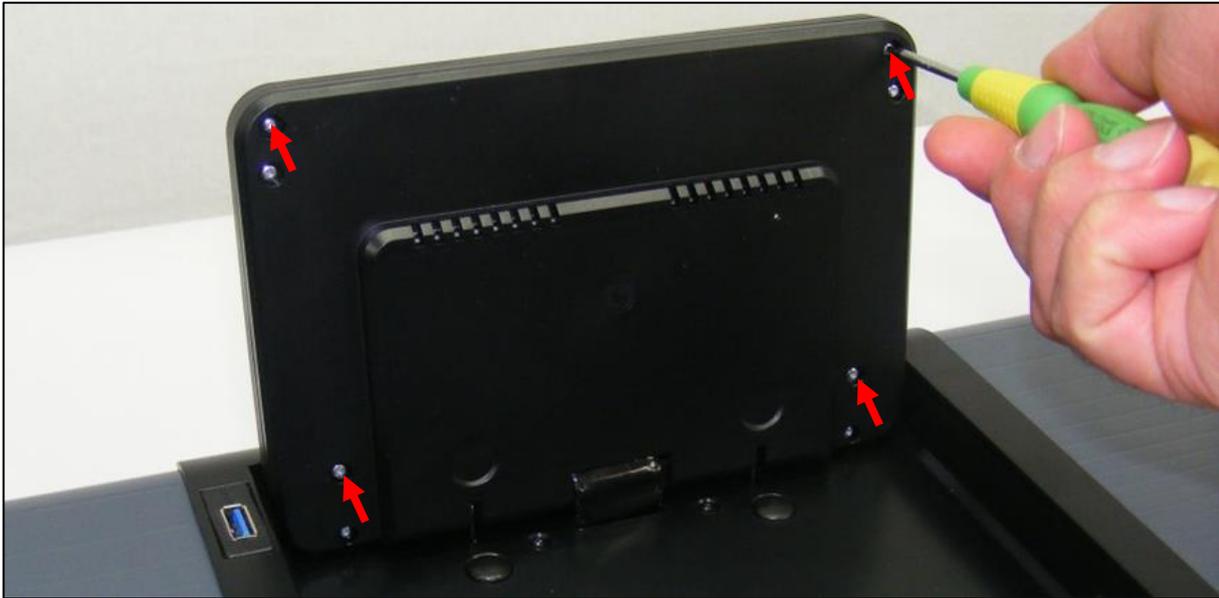


1. Lift the LCD Touch Screen up, and remove the 4 corner (T6) screws.




2. Separate the Touch Screen display from the rear cover.

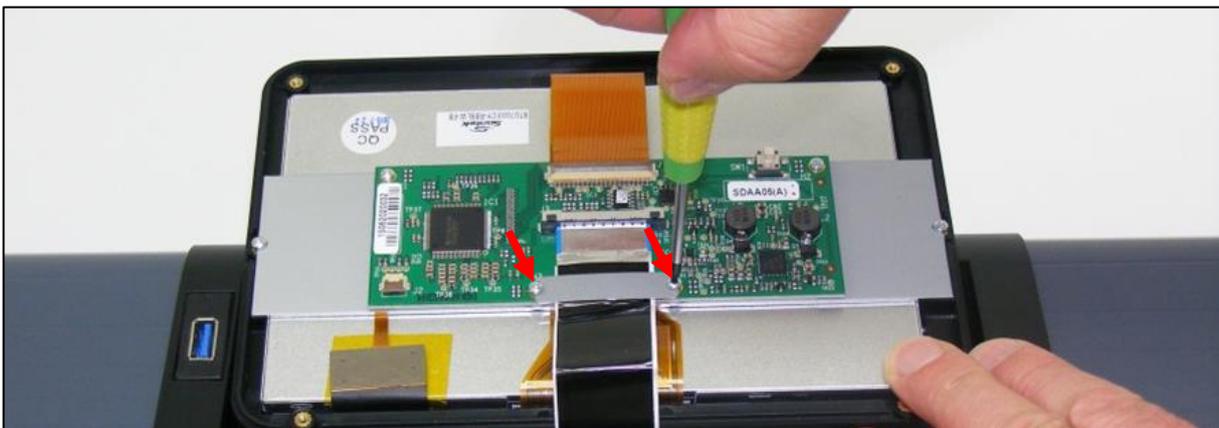


3. Remove the ribbon cable clamp.

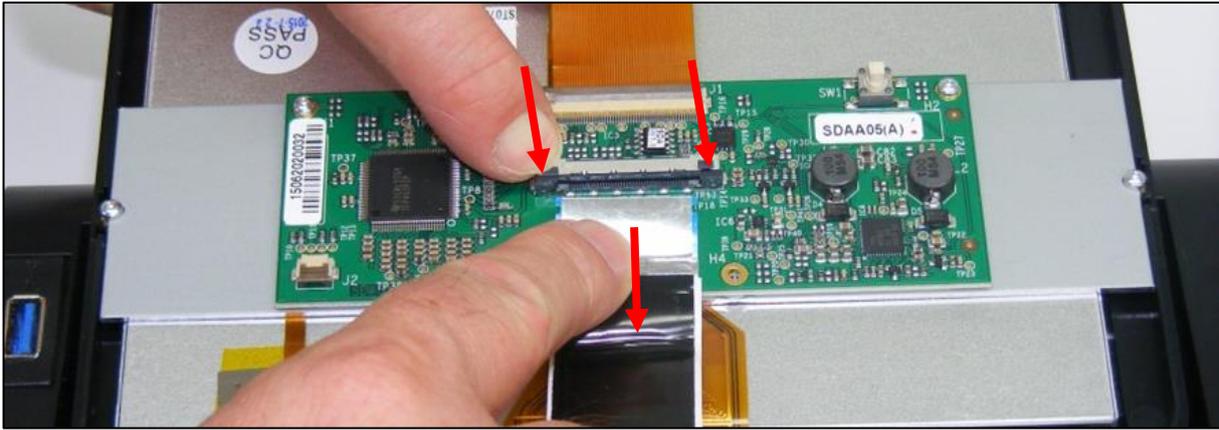


4. Disconnect the Touch Screen ribbon cable by pressing down on the release buttons while pulling the cable out.

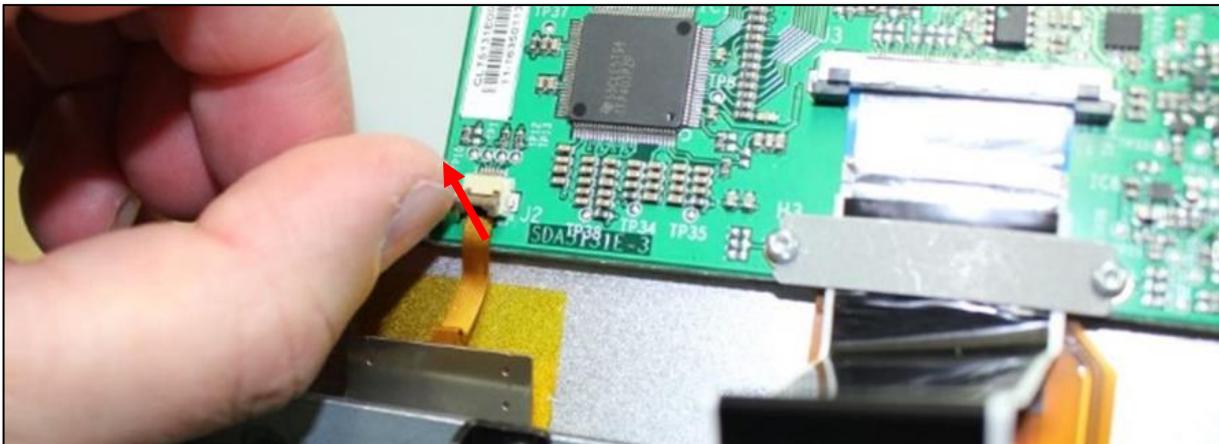


5. To disconnect the Touchscreen flat cable, simply, lift the locking plate up, using fingernail is sufficient, as using a screwdriver could damage this tiny connector.

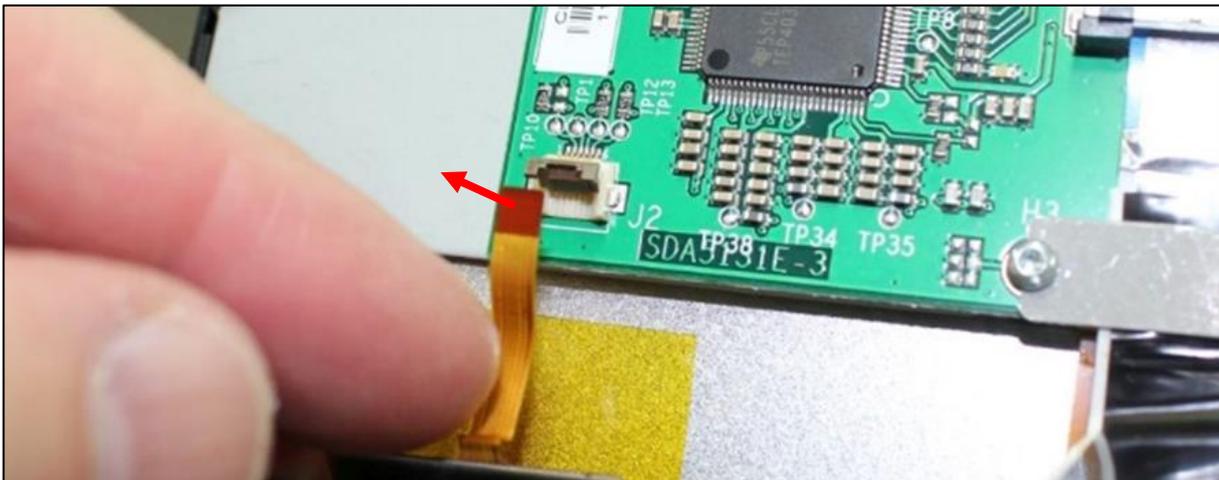

6. Lift the cable out of the connector

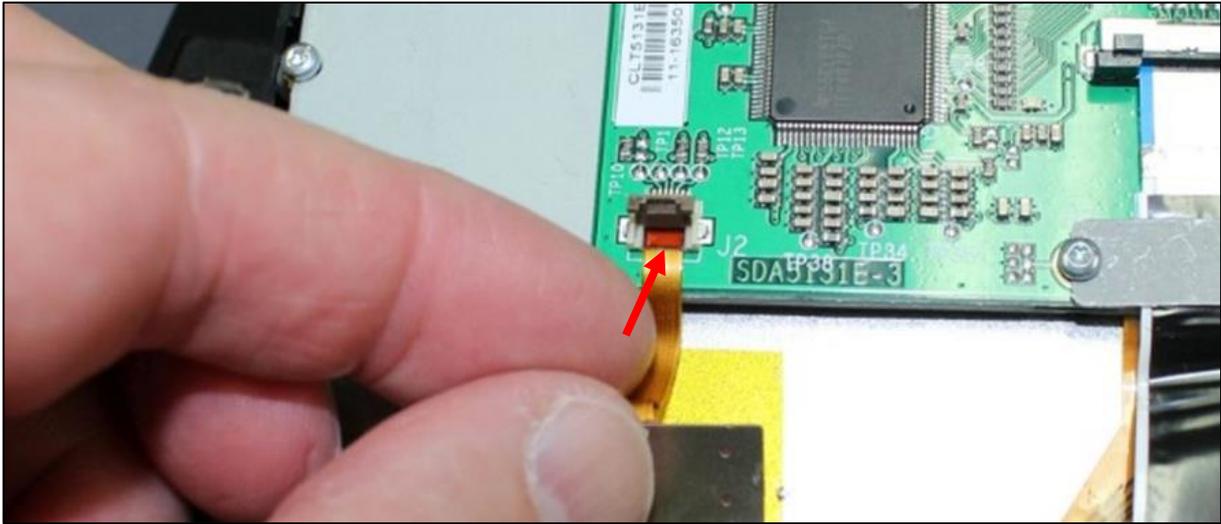

7. Fit the touchscreen flat cable, so that it fits inside the groove of the connector centrally.

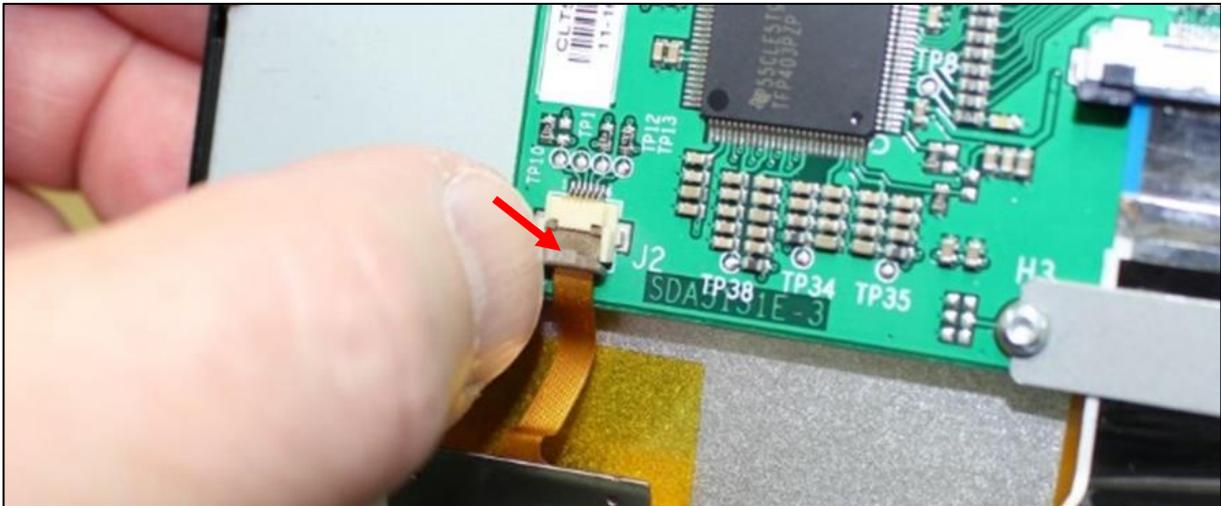

8. Press the locking plate of the connector down until it locks in place, securing the cable.




9. Clip the touchscreen and rear panel back together and replace the 4 x T6 screws.

4. WIDEsystem Service, walk though

- Since this chapter is not scanner specific, some of the illustrations may not apply completely to the scanner you are working on, like number of Cameras and transition areas.
- Widesystem / Service consists of 17 different tests designed to help you service the scanner. These test are divided on 5 different tabs according to what you are doing on the scanner.
 - Paper Path/Handling
 - Image Quality
 - Electrical
 - Utilities
 - Post Replacement

Some of the tests may appear on one or more tab's. Each test is also associated with a number for easy reference.


No.	Name.	Tab.
1	Set Serial no.	(Post Replacement)
6	Motor Test	(Electrical, Post Replacement)
9	Oscilloscope View Cameras	(Image Quality, Post Replacement)
11	Manual Camera (alignment & Stitching)	(Image Quality)
12	Manual Scaling	(Image Quality, Post Replacement)
20	Streak / Noise Test	(Image Quality)
42	Backup Calibration and Statistics	(Utilities)
43	Restore Calibration and Statistics	(Utilities, Post Replacement)
46	Paper Sensor Test	(Paper Path/Handling, Post Replacement)

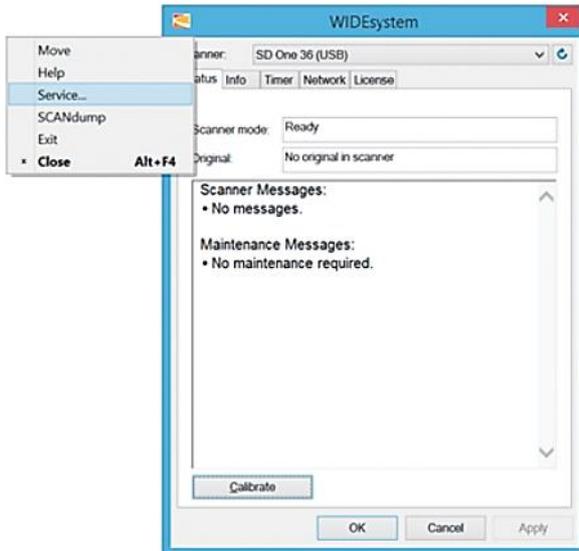


1. Getting access to the Service module in WIDEsystem is done by clicking on the logo in top left-hand corner of WIDEsystem and selecting “Service”.




2. A password is required. (Only available to authorised Technicians)

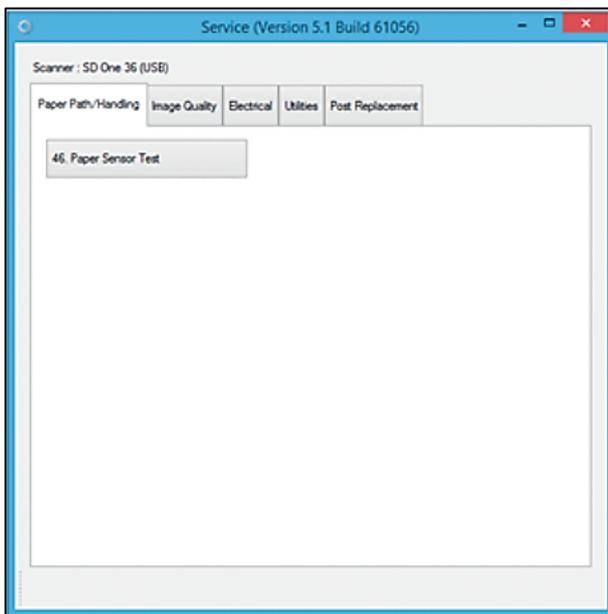


3. The service module defaults to the first tab, “Paper Path / handling”.

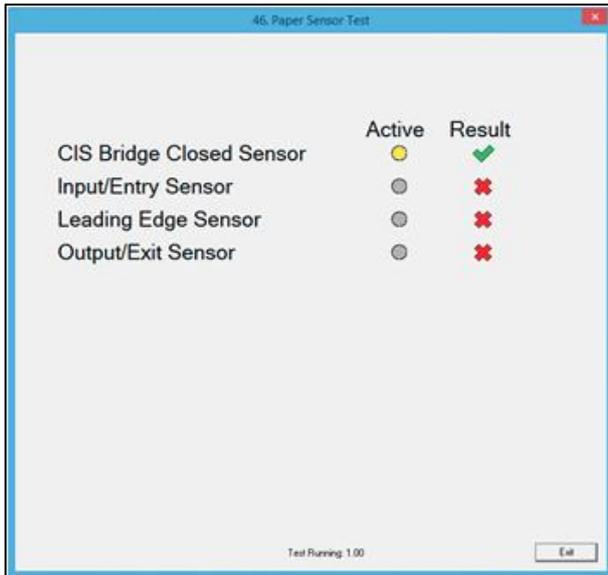

4. Test 46. Paper Sensor Test. Checking all the sensors in the paper path.

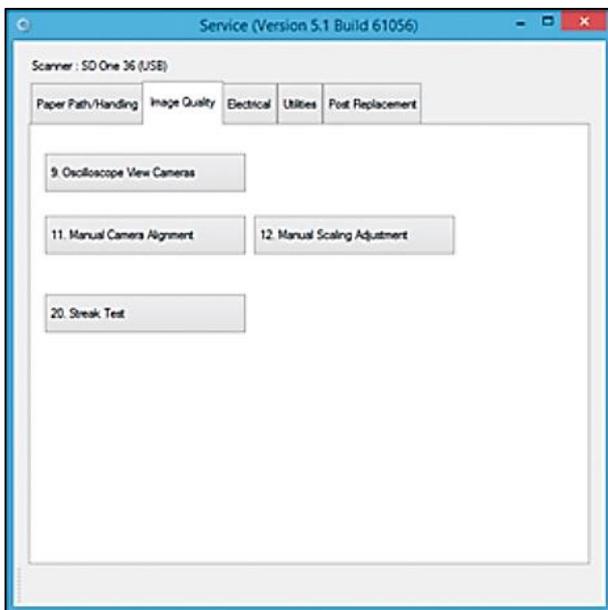


5. Tab for test related to Image Quality

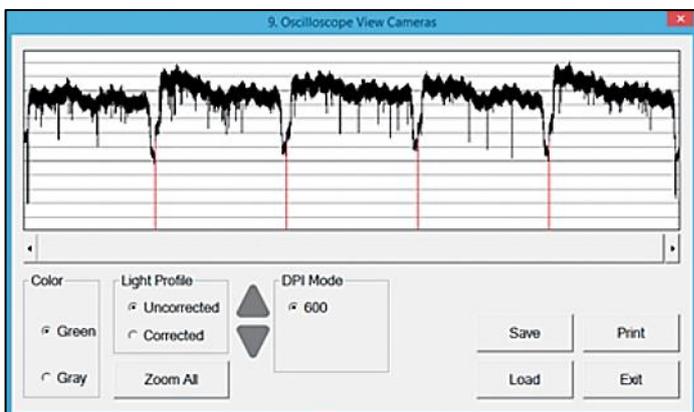

6. Test 9. Oscilloscope View Cameras.

Provides you with a live image of what the CIS elements are looking at.


- “Light Profile”.
- Uncorrected light profile shows the raw data from the CIS module. Corrected light profile shows the calibrated data.

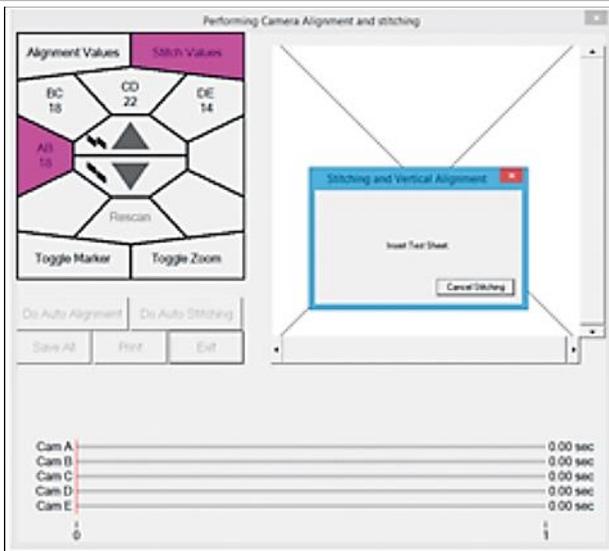

7. Test 11. Stitching & Vertical Align.

Allows you to adjust either Alignment or Stitching between two CIS modules.


- 1) Select Alignment or Stitching.
- 2) Select the transition area (AB, BC.....)
- 3) Use the arrows to either increase or decrease the value.

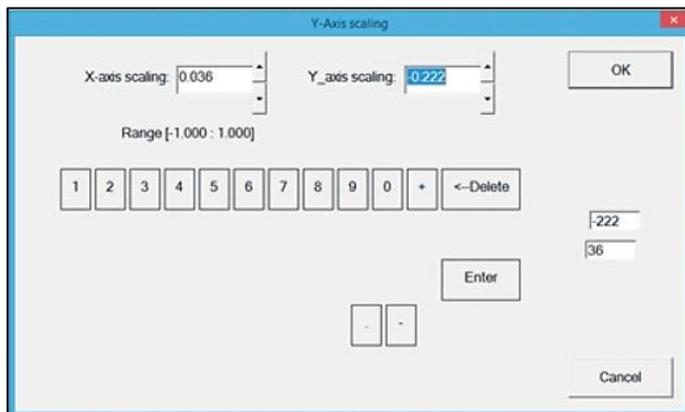

8. Test 12. Adjust Y-axis Scaling.

Here can you adjust the X and Y scaling.


- Scan a known size image, measure in Nextimage, compare and adjust. The correction is done in % of the deviation.

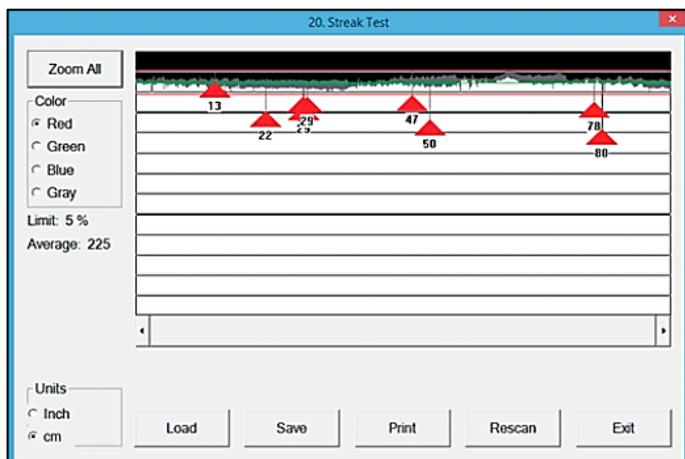


9. Test 20. Streak & Noise test.

This test is very useful if there are image quality issues such as streaks throughout the scan. (scan direction). It can be determined if the streaks are: dust that are:


- 1) Present in the scanner (Dark streak that goes below the average line).
 - 2) It has been present during Scanner Maintenance (White streak that goes above the average line).
- Insert SM calibration sheet when asked.

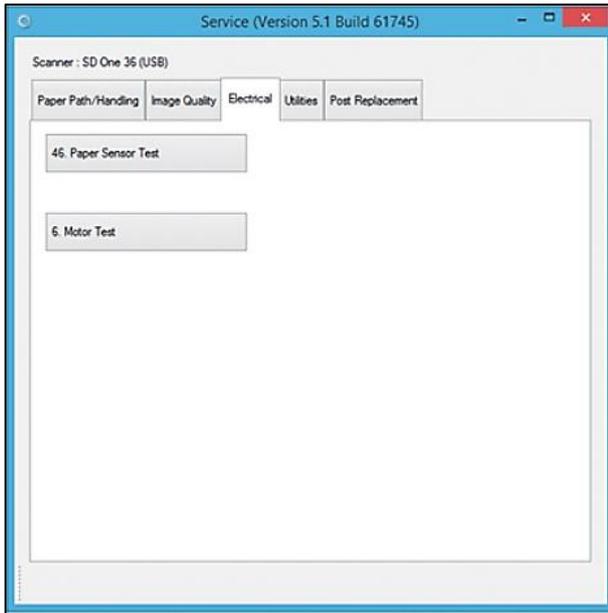


10. Tab for test related to electrical components.

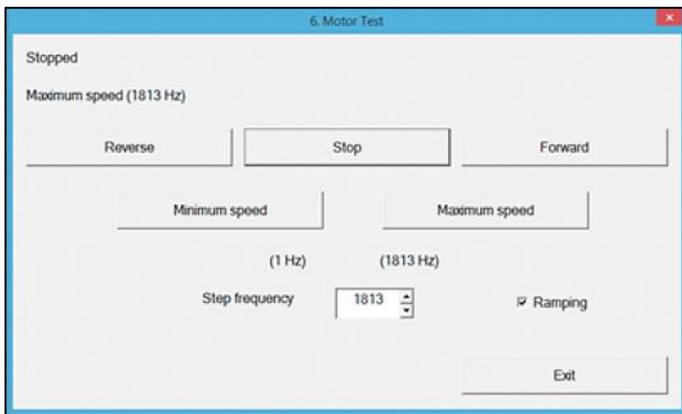


11. Test 6. Motor Test.
To control and test the movement of the motor.

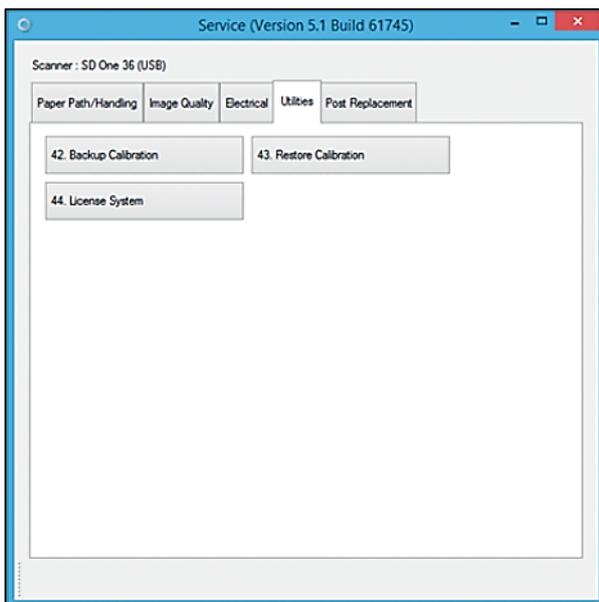


12. Tab for test related to the main board.

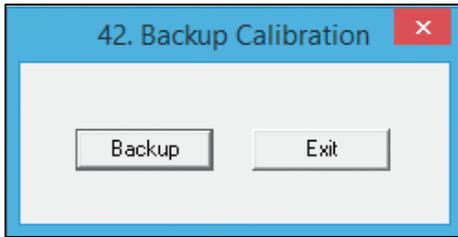


13. Test 42. Backup Calibration and Statistics.

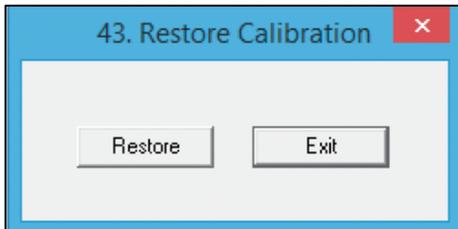


14. Test 43. Restore Calibration and Statistics.

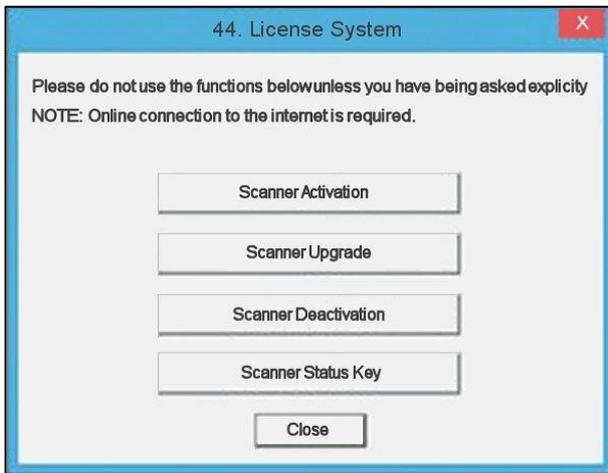

15. Test 44. License System.

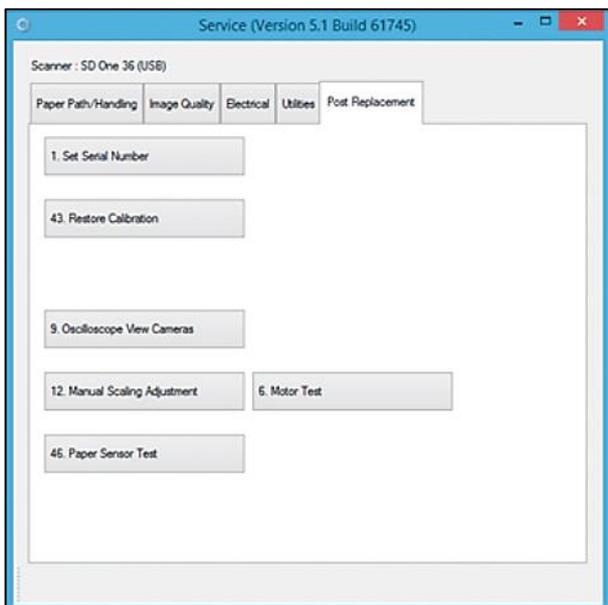


16. Tab for test related to Part replacement

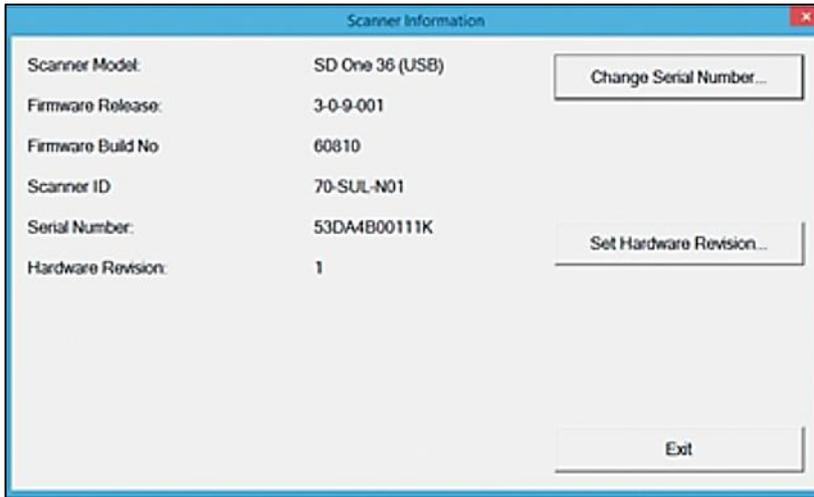


17. Test 1. Scanner Information.

Erase Parameter block


- The Parameter block in the scanner can be erased through the Calibration Dialog in WIDEsystem.
- Always Use the latest version of WIDEsystem and have the latest version of Firmware loaded in the scanner. Both can be downloaded from our web.

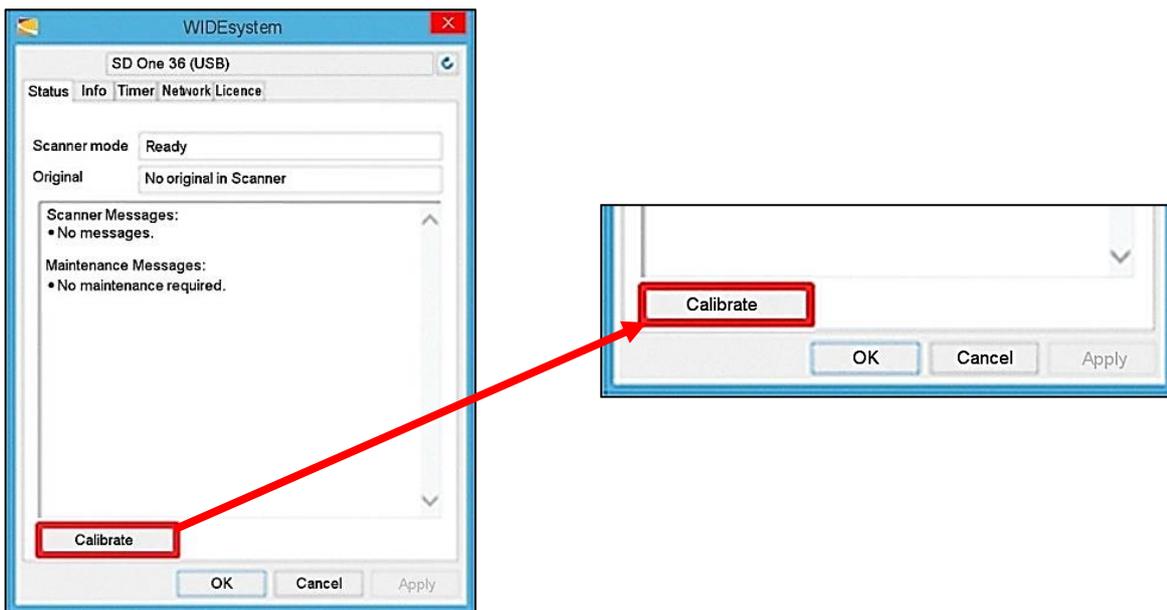

1. Open WIDEsystem on the Status tab.
2. Select Calibration



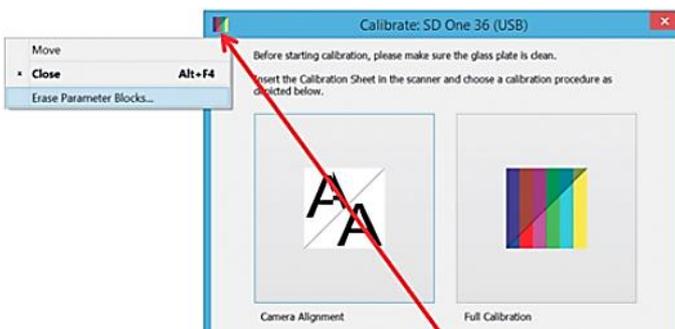


3. Click on the Calibration icon.
4. Select Erase Parameter Blocks

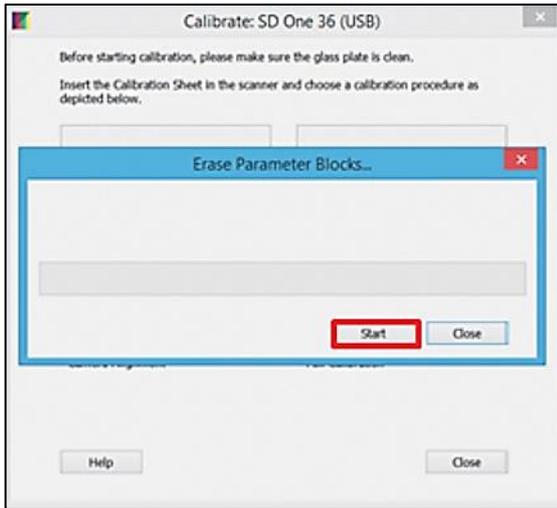

5. Click Start to continue with Erase the Parameter Block.

Only data that can be restored by a Calibration will be erased!

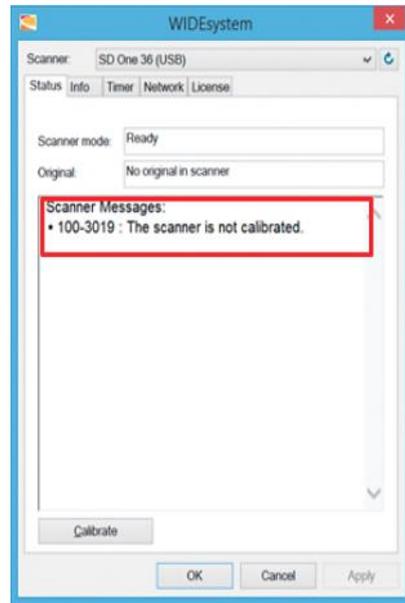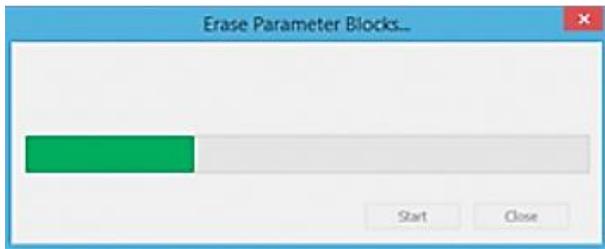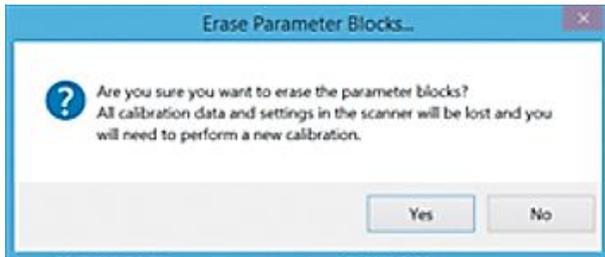

Once the scanner has rebooted, WIDsystem will report that “The scanner is not calibrated

Firmware Download, walk-through

- The latest Firmware can be obtained from www.contex.com.
- Identify the scanner model and download.
- The computer that will be used for the firmware download needs to have WIDEsystem installed!

Name	Date modified	Type	Size
 FW_ctx_3-0-9-002_b061644.exe	1/16/2015 2:39 AM	Application	1,565 KB


1. Execute the file.

Note:


The name on the downloaded file will change according to the Firmware version.




2. Follow the instructions in the Scanner Firmware Wizard.

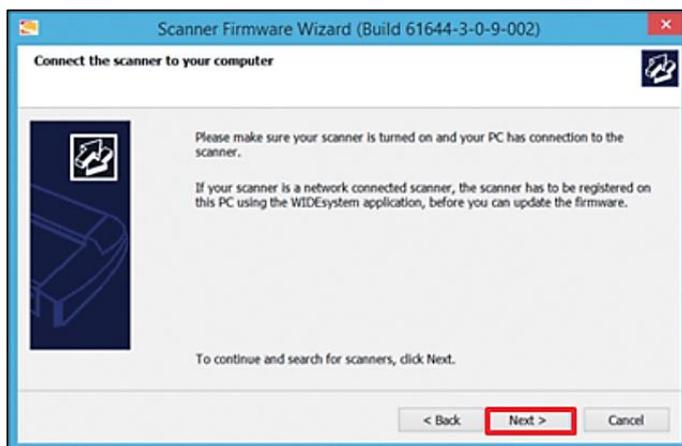


3. Do **not** turn power off to the scanner or the PC during Firmware upgrade process.

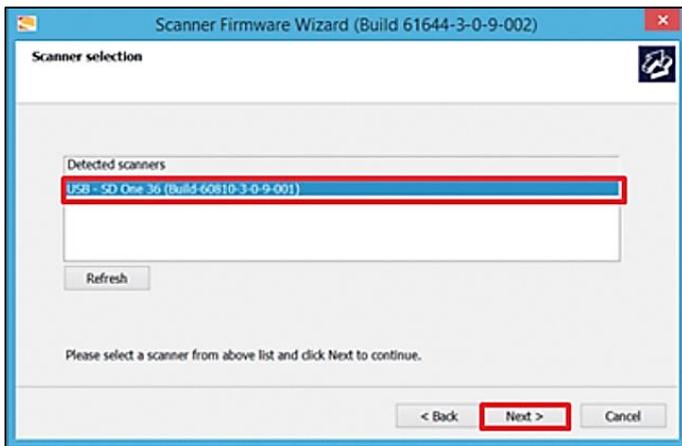


4. Select the scanner that you wish to upgrade and click next.

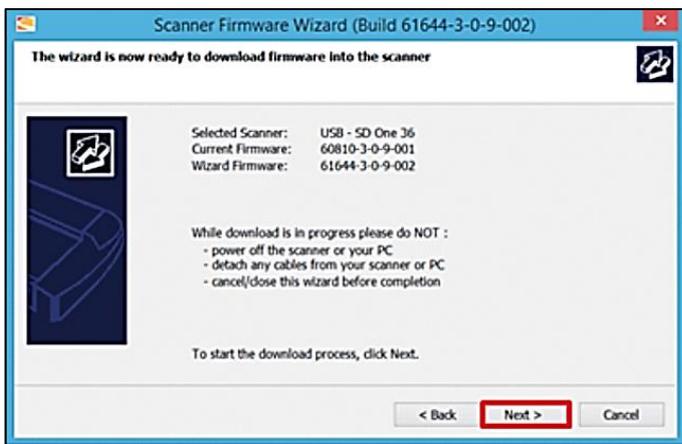


5. After validating the info, click next.

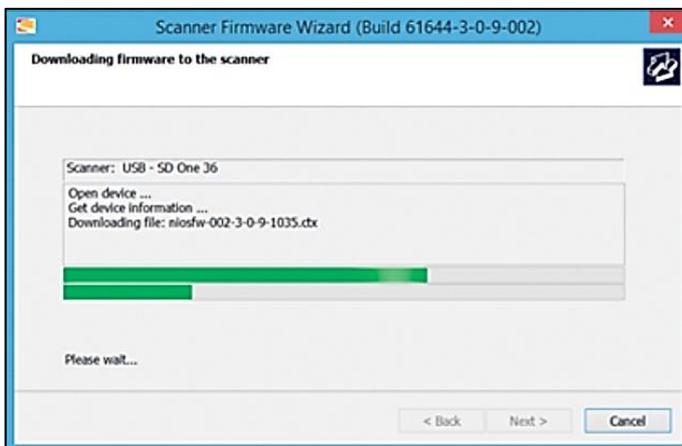

6. The Firmware program will now unpack, download, activate the firmware in the scanner and finish with rebooting the scanner.

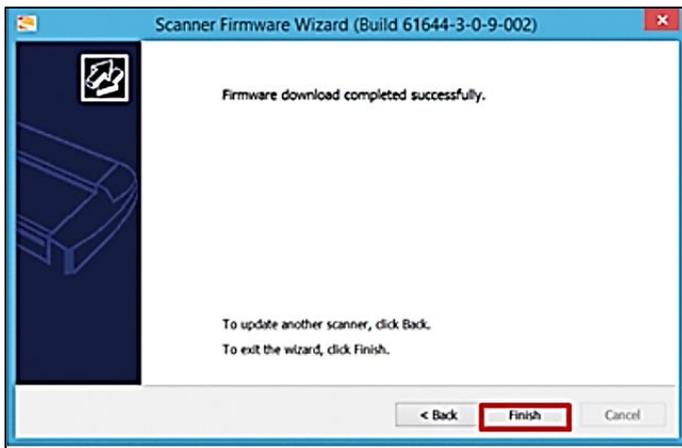

7. The scanners firmware has now been updated.
8. Calibrate the scanner

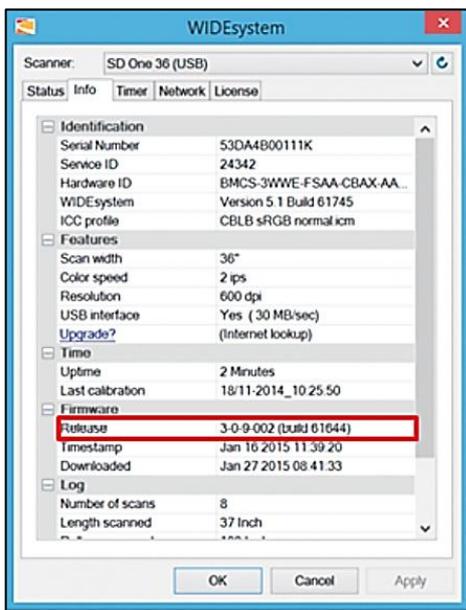

9. Once the scanner is back up and recognized by WIDEsystem, check that it has the new firmware.

5. Scanner Terms

<i>Activation Code:</i>	Is the when the product specific License code has been pared with a Scanner serial no.
<i>AdaptiveThresholding:</i>	Advanced 2-D Adaptive Thresholding estimates the background grey level in a window area around each pixel. The difference between the actual pixel value and the background is then compared to the adaptive settings to determine if a pixel is thresholded as a black or a white pixel.
<i>AdaptiveThresholding:</i>	Advanced 2-D Adaptive Thresholding estimates the background grey level in a window area around each pixel. The difference between the actual pixel value and the background is then compared to the adaptive settings to determine if a pixel is thresholded as a black or a white pixel.
<i>Additive Colors:</i>	The additive primary colors are red, green and blue. These additive primaries represent the three main components of white light. Used individually or together, these three colors of light can be mixed to create nearly all colors. When these three primary colors are mixed in equal parts they produce white. Additive color is used in scanners and computer displays.
<i>ADL+ Error Diffusion Halftoning:</i>	Image Processing that supports visibility of greytone in printed output by adding toned shades of grey in regions between black and white. Carried out as a segment of Dual 2D-Adaptive enhancement processing in copy modes.
<i>ALE - Accuracy Lens Enhancement:</i>	Accuracy Lens Enhancement (ALE) is an electronic correction of spherical errors in CCD based camera- scanning systems. When looking at pixels across the range of a camera, the pixels tend to be more elliptical at the outside edges of the lens and more round in the middle of the lens. This anomaly is known as a spherical lens error and can introduce inaccuracies in the scanning system that can vary quite substantially between different points along the scan line. Most manufactures typically state a $\pm 0.1\%$ accuracy of the scanner between the two outermost end-points of the scan line. However, when measuring between two points that do not fall across the entire scan line, it is not unusual to see variations of up to $\pm 0.5\%$ or even higher. This is naturally unacceptable in demanding environments and markets such as GIS, which need a stable and well-defined maximum error of 0.1% or less. ALE solves this problem by a process to electronically correct the spherical errors in the scanner and maintain a stable maximum error across any two points of less than $0.05\% \pm 1$ pixel.

- ATAC:** Automatic Thickness Adjustment Control - A special technology that allows the scanner pressure platen to be raised to accommodate thick originals and then lowered - both actions performed by pressing a key from the operators panel. Sensors in the platen detect when perfect pressure is applied to the the original and automatically stop the downwards motion of the platen so it rests on the original with an optimal grip.
- Bitmap:** An image format made from a matrix of individual pixels (.bmp).
- Bitmapped Image:** A bitmapped image is a computer file representing a line-art image that was scanned with a scanner. Refers to the pattern (map) of bits that are either black or white.
- Black Level:** The Black Level is a setting in scan programs used to change dark greytone colors to true black. For example, if one is copying a brochure with a mixture of text and pictures, the text will often be digitized to a color that we may see as black but really is a dark greytone. When the printer digests this greytone data, it will print the original's text with a halftone pattern, meaning scattered dots instead of solid black. By increasing the Black Level value, one can get the text to be copied in real black and it will therefore appear clearer.
- Black Point Adjustment:** An adjustment made that will determine the amount of shadow detail in an image. It is considered proper to set the black point so that the darkest part of an image will only just have zero detail.
- Blueprint:** A process of photographic printing used mainly for copying architectural and mechanical drawings; produces blue lines on a white/bluish background.
- Blur:** The averaging of pixel elements.
- Brightness Adjustment:** An adjustment on a scanner that allows the user to compensate for a light or dark original.

<i>Calibration:</i>	Adjusting a device so that it performs in accordance with an established standard. Scanner calibration is minimizing color deviation between scanned ANSI IT8 reference color patches and the known color reference values. Generally, Calibration is the process of setting a device to known color conditions - stabilizing the device to a known and quantifiable state. Calibration is commonly done with devices that change color frequently, such as monitors (phosphors lose brightness over time), scanners (light changes) and printers (proofers and other digital printing devices can change output when colorant or paper stock is changed).
<i>CALS:</i>	Computer-aided Acquisition and Logistics Support (CALS) standard, a U.S. Defence Department and industry initiative that addresses the design, manufacture, and support issues of generation, access, management, and use of technical data in digital form.
<i>CCD:</i>	Charge Coupled Device, CCD is the image sensor in the scanner that converts light to voltages. These voltages are converted by the scanner into the image.
<i>CCITT Group3:</i>	Standard run-length compression format used with FAX transmission. It utilizes modified Huffman coding to further compress the run-length numbers. Most scanner file formats are dialects of this format.
<i>CCITT Group4:</i>	Two-dimensional compression format, giving very compact image files. Standardized by CALS (MIL 28002) and ISO-ODA for Drawing Archival and Interchange.
<i>CIE LAB:</i>	A device-independent color space specified by CIE, used in modern color management software to facilitate conversion of data from a scanner to a display, or from a display to an output device.
<i>CIE:</i>	Centre Internationale d'Eclairage (CIE) is an international organization that establishes methods for measuring color. These color standards for colorimetric measurements are internationally accepted specifications that define color values mathematically. The first color space model, the CIE xyz, was developed in 1931. CIE defines color as a combination of three axes: x, y, and z. The two color spaces released in 1978 are CIE Lab and CIE Luv. The goal was to provide an accurate and uniform reference of visual perception.
<i>CMYK:</i>	The subtractive printing colors. Cyan, Magenta, Yellow, Black.
<i>Color Balance:</i>	The visual effect of an image when the amount of each color and the overall amount of color are balanced.

<i>Color bit depth:</i>	The simplest pixel has two options: black or white. (A pixel with two choices is known as a 1-bit image, or two raised to the power of one). Adding more bit information increases the number of color options. The number of potential color options for a pixel is called color bit depth. For example a 4-bit pixel would have 16 color options, and an 8-bit pixel would have 256 color options, while a 24-bit pixel would have 16,777,216 color options.
<i>Color Cast:</i>	An image is said to have a color cast if its colors are not true. A color cast will usually be described by stating the particular color predominant in the image, e.g., the grass appears to have a red color cast.
<i>Color Correction:</i>	To improve the color rendition. Correcting for, and eliminating an unwanted color cast.
<i>Color Management System:</i>	Color Management System (CMS) software increases the accuracy of color interchange between scanners, displays and printers based on profiles for each device. The CMS is a layer of software resident on the computer that negotiates color reproduction between the application and color devices. The CMS performs the color transformations necessary to exchange accurate color between diverse devices. The Color manager needs access to characterization data for the device. The format and content of such device profiles is standardized by the International Color Consortium (ICC.)
<i>Color Separation:</i>	Process of separating colors, in an image, into primary color components for printing. Converting an RGB color image into CMYK color image. Color separation is a technical function during which critical settings such as GCR, black ink limit and total ink limit are applied to the image.
<i>Color Space:</i>	A color space is a particular language used to describe color. Examples of color spaces are: RGB, CMYK, HSV, CIE LAB.
<i>Contrast:</i>	The difference between the lightest and darkest significant areas in a picture. A picture with high contrast has nearly white areas and nearly black areas with sharp changes in brightness between them. The picture seems dominated by stark light and dark tones.
<i>Density units:</i>	Photographers and printers measure transmission in base-10 logarithmic density units, where transmission of unity corresponds to a density of 0, transmission of 0.1 corresponds to a density of 1, transmission of 0.01 corresponds to a density of 2, and so on.
<i>Density:</i>	The light stopping ability of a film. Density is inversely proportional to the amount of light reflected or transmitted by an image.

<i>Device Dependent Color Space:</i>	For example RGB. A device dependent color space, e.g., the same scan file will appear different when viewed on different computer displays. For example CIE LAB. A device independent color space is one in which color values are absolute, e.g., defined by CIE standard. CIE LAB is the central color space in color management systems (CMS) and is used to translate between different device dependent color spaces such as scanner RGB and display RGB.
<i>Device Profile:</i>	A file used as part of a Color Management System (CMS). A device profile contains information about the characteristics of a scanner, computer display or printer. The format for device profiles (Win95, Colorsync. etc.) is standardized by ICC (International Color Consortium).
<i>DIP:</i>	Digital Image Processor. Hardware embedded function that does image enhancement in real-time while scanning.
<i>Dither:</i>	To use patterns of different colored pixels to create blended colors; or, to use dots of different sizes to simulate greyscale images. (see below).
<i>Dithering:</i>	A printing or display device may have only a small number of greyscale or color values for each device pixel. However, if the viewer is sufficiently distant from the printed page or display, the value of neighbouring pixels can be set so that the viewer's eye integrates several pixels to achieve an apparent improvement in the number of levels or colors that can be reproduced.
<i>Dots Per Inch (dpi):</i>	A measure of dots in a square inch where the individual element is a round dot on the printed page.
<i>DPI:</i>	Dots Per Inch, equivalent to Pixels Per Inch. An expression of resolution of a scanned image.
<i>DSP:</i>	Digital Signal Processor, does image enhancement in real-time while scanning.
<i>Dual 2D-Adaptive Enhancement:</i>	Enhancement processing on the foreground and background separately. Processing is performed on-the-fly. The separate enhancement processes are simultaneously performed on different drawing aspects.
<i>Dynamic Range:</i>	A measurement of scanner quality; the density difference between highlights and shadows.
<i>Edit:</i>	Modify an entry using standard Windows text-editing techniques.
<i>Emulsion:</i>	The light sensitive silver, coated on the clear acetate film base, that forms the photograph when a picture is taken and the film is developed.

<i>Equalizing:</i>	Distributing all color or tone equally along a density range.
<i>File Format (image):</i>	The format in which a scanned picture is saved. Many programs can insert or import a picture from a file, if it is saved in a file format that the program supports. Common file formats include TIFF (Tagged Image File Format), BMP (Windows bitmap), JPEG (Joint Photograph Expert Group), and FPX (FlashPix format).
<i>Flip Horizontal:</i>	To flip the picture left/right.
<i>Foreground:</i>	Foreground when scanning raster data (black and white, or monochrome data) refers to the pixels that represent data of interest (background refers to everything else). Typically, lines and shapes are represented by black pixels (foreground) and empty space is represented by white pixels (background). When scanning greyscale data, background means the grey level of a region of pixels that surrounds some desired foreground data.
<i>Gamma Adjustment:</i>	An adjustment that makes the tone distribution lighter or darker in an image.
<i>Gamut Transformation:</i>	Color Management System function, where out-of-gamut colors are converted to colors within the gamut of the targeted device, e.g., a printer.
<i>Gamut:</i>	The color range scannable, printable or displayable by a device; e.g., if some of the displayable colors are outside of the gamut of the printer they cannot be printed.
<i>GCR:</i>	Grey component replacement. A color separation setting used on color photographs where cyan, magenta and yellow inks are replaced by black ink (in a balance that would yield a grey value). The advantages are a reduction in overall ink usage and some increase in image detail.
<i>Greyscale:</i>	A term for a black and white photographic image or a scanner setting. Refers to the range of 256 greytone levels that make up the image.
<i>Halftoning:</i>	The processes of offset printing and laser printing are intrinsically bi-level. However, these devices can reproduce a range of tone levels by halftoning; e.g., an array of widely spaced dots produces the perception of light grey, and an array of tightly spaced dots produces dark grey. Halftone dots are usually placed in a regular grid. In color printing it is conventional to use cyan, magenta, yellow and black grids that have exactly the same dot pitch but different carefully-chosen screen angles.
<i>Hardware id:</i>	Is a unique ID no for the scanner, based on the scanners serial no and MAC address.

<i>Highlights:</i>	The lightest part of a picture reproduced as white on the screen or when printed.
<i>Histogram:</i>	A bar graph representing the statistical distribution of Greytones or colors in an image. Each column represents the number of pixels at that grey level or color.
<i>HLS:</i>	A color space with the three variables of Hue, Lightness, Saturation. See HSV.
<i>HSV:</i>	A color space with the three variables of Hue, Saturation, Value. Hue means color (as in the color wheel.) Saturation is an indication relating to the richness or vibrancy of the color. Value is a term best related to the intensity of light illuminating the object.
<i>Hue:</i>	A named color. In discussions of color that relate to photography, scanning, and printing, six hues are especially important: red, yellow, green, cyan, blue, and magenta. These hues make up every color we can see, and are the designated hues on color wheels. Hue is also a measurement of color that can be related by pointing towards a certain color on the color wheel. Hue indicates the relative redness, blueness, greenness, yellowness, etc, of a color.
<i>ICC:</i>	The International Color Consortium (ICC) was formed to address the need for a common color framework. The ICC has developed a standard device profile that contains information about how various devices render color. This concept is supported by Apple (Colorsync), Microsoft for Windows 95, Sun for Solaris, and by Silicon Graphics for Irix.
<i>Image Editor:</i>	A program used to edit pictures to change colors, increase detail, scale or otherwise alter the picture.
<i>Indexed color:</i>	Indexed color (or pseudo-color) is the provision of a relatively small number, say 256, of discrete colors in a colormap or palette. For each pixel in the image, the index number of a color is then stored. When retrieving the image, a lookup table uses the index to retrieve red, green and blue components that are then sent to the display. In graphic file formats such as PCX or TIFF, an indexed color image is accompanied by its colormap.
<i>Interpolation:</i>	Using the interpolation method of resampling generates values for points in between the actual pixels by looking at the surrounding colors or intensities. In a scanner resolution is increased beyond the actual number of CCD cells. As each line of pixel data arrives from the cameras, new interpolated pixels are added between original pixels. The added pixels enhance line edge definition.
<i>JPEG Compression:</i>	Joint Photographic Experts Group Compression. A method to save storage space by compressing files. JPEG achieves a high degree of compression by discarding non-important picture detail.

<i>JPEG:</i>	A compressed file format for images. Named after the Joint Photographic Expert Group, JPEG images feature small file size and speed, but lower quality than other formats.
<i>License Code:</i>	Is the product/model specific code that the Customer receives with his Scanner (base model).
<i>Lossless Compression:</i>	File compression and subsequent de-compression without any loss of data.
<i>Lossy Compression:</i>	File compression that will compress data to a high degree. When subsequently un-compressed, data will have been lost.
<i>LZW:</i>	Method of lossless compression used with many file formats; developed by Lempel, Zev and Welch.
<i>Midtones:</i>	The most important part of a picture between black (shadows) and white (highlights).
<i>Negative:</i>	A reversed photographic image used to produce a positive print or a scanned image.
<i>NET - NET Architecture:</i>	<p>NET Architecture is a solution for scanning across local networks.</p> <p>What does it do?</p> <p>Enables Sharing a scanner on a network.</p> <p>Enables scanning to a Designated Scan.</p> <p>Folder on another computer. NET Architecture allows a scanner to scan to a client PC in a single coherent and secure process. The client does not need to expose or share his local hard disk as the system can be set up for authorized transfer to the client. Example of usage - a company that</p> <p>needs to create digital documents of its drawing archive, can send the drawings to a service bureau that scans all the documents directly to the client (company) file server allowing immediate feedback from the client and prevents digital distribution of confidential documents outside the client company. NET Architecture also allows users in a company to use a scanner, from their own PC workstations although the scanner is physically placed elsewhere. It only need to be on the same LAN. In this way a single scanner is “shared” throughout the company.</p>
<i>Noise:</i>	A term used to describe the occurrence of pixels that contain random colors within an image.
<i>Original:</i>	The paper, negative, slide, or film to be scanned.

<i>Palette:</i>	The set of colors available for an image.
<i>PICT:</i>	A file format for pictures used primarily on the Macintosh.
<i>Pixels Per Inch (ppi):</i>	A measurement of resolution for scanners, where the individual element is a square picture element (pixel).
<i>Pixels:</i>	The word pixel is a combination of the two words picture and element. It is the smallest building block within a scanned line-art or photographic image. A pixel is the small square picture element that is filled with a color, black or white. The value of a pixel depends on the luminance of the area, and is either a single bit for a black and white image, or multi-bit for a color or grey-tone image. Pixels come in various sizes and their size is expressed in terms of resolution. Resolution is measured in pixels per inch (ppi) or the equivalent dots per inch (DPI.)
<i>PostScript:</i>	A computer language developed by Adobe (R) Systems, Inc. for printing text, graphics, and scanned images. PostScript (R) is a vector format that can include scanned bitmapped images.
<i>Raster File</i>	Also called Raster Image or Bitmapped Image. A picture composed of individual dots (picture elements, pixels) the way a scanner perceives it. The rows in a high-resolution raster file typically contain 200 or 300 dots per horizontal inch of the original drawing, and there are typically 200 or 300 rows per vertical inch. As each of these dots is defined by location, and by whether it is on or off, raster images generally result in large data files.
<i>Resolution of a Scanner:</i>	Expressed as DPI (dots per inch) or the equivalent ppi (pixels per inch). The higher the resolution of a scanner, the smoother the scanned images.

<i>Resolution:</i>	<p>A measure of how many pixels per inch are scanned. Generally, more pixels per inch means more detail in the picture and a larger file when saved. Defines the level of detail that can be captured or shown by a scanner, display, or output device. For scanners, the resolution is defined</p> <p>by the number of dots (pixels) per inch (DPI) that can be captured horizontally and vertically, e.g.</p> <p>300 DPI equals 90,000 pixels per square inch. Screen Resolutions are normally 72 pixels per inch</p> <p>of screen. Additional detail is thrown away by the screen display driver, anyway. For Printer Resolution scans, you need 150 dots per inch and above for good results on the printed output. One must find the level of detail that is still visible in printed output on the printer in question, and not dramatically increase the size of a saved file without bettering the result.</p>
<i>RGB:</i>	<p>Red, Green, Blue. These additive primary colors are the basic elements of white light. By mixing them on a computer monitor or in a scanned image file, other colors can be created. For instance, Red and Green produces Yellow, and equal amounts of all three produce grey.</p>
<i>RIP:</i>	<p>Raster Image Processor. A RIP is a special software that converts scanned images into a color dithered (halftone) image that can be output directly. An image must be 'ripped' before it can be output on a CMYK device, e.g., an inkjet printer.</p>
<i>Rotate:</i>	<p>To turn the picture left (clockwise) or right (counter-clockwise) from the orientation in which it was scanned.</p>
<i>Runlength Encoding:</i>	<p>A method of compressing raster or bitmap data by representing "runs" of white or black dots along a scanned line as the number of dots in each run. Many variations of this scheme exist, with varying compression efficiency. Typically, run length compression formats yield a file 20-25% the size of an uncompressed file.</p>
<i>Saturation:</i>	<p>The level of colorfulness of the picture. A picture with high saturation has vivid color. A black and white picture has zero saturation. The purity of a color or the degree to which it is diluted with white light. Red is a highly saturated color. Pink is a diluted red (has lower saturation). Saturation is one attribute of color in the color space called HSV (Hue Saturation, Value). Saturation is a characteristic indicating the vibrancy or intensity of a hue. A color with high saturation will appear more intense than the same color with less.</p>
<i>Scale:</i>	<p>To reduce or enlarge the size of a picture proportionally.</p>
<i>Scanner Calibration:</i>	<p>A program that helps adjust the scanner to achieve stable colors and work with a printer. Calibration gives better scanning results. The program should be run whenever changing printing equipment, toner, and inks, and whenever getting poor results when printing pictures.</p>

- Screen Calibration:* A program that helps adjust the computer screen to get the best display of scanned pictures and documents. This program is run during installation and should be used again any time that the computer screen or the lighting around the computer is changed.
- SCSI:* Small Computer System Interface. An interface that allows hard disks and other high performance peripherals to be attached to Macintosh and PC computer systems. Specification of interface to computer equipment like disks, printers, scanners etc.
- SCSI Card* The printed circuit card that came with the scanner. With its driver software, the card allows the computer to talk to the scanner. The card is ASPI compatible with a SCSI-II output connector.
- Shadow Detail:* The amount of detail contained in the dark parts of an image. It is desirable to maintain shadow detail, but there is a risk of decreasing overall contrast if one lightens the shadow too much in an attempt to expose additional detail. If an image is scanned without shadow detail, it will be impossible to regain detail using an image editing program.
- Shadow:* The darkest part of a picture; reproduced as black onscreen or when printed.
- Sharpness:* An attribute of a scanned image and also an attribute of scanner quality.
- sRGB:* Hewlett-Packard and Microsoft proposed the addition of support for a standard color space, sRGB, within the Microsoft operating systems, HP products, the Internet, and all other interested vendors. The aim of this color space is to complement the current color management strategies by enabling a third method of handling color in the operating systems, device drivers and the Internet that utilizes a simple and robust device independent color definition. This is to provide good quality and backward compatibility with minimum transmission and system overhead. Based on a calibrated colorimetric RGB color space well suited to Cathode Ray Tube (CRT) monitors, television, scanners, digital cameras, and printing systems, such a space can be supported with minimum cost to software and hardware vendors.
- Stitching:* In large format multiple CCD camera scanners, electronic stitching adjusts for overlap in the field of view of adjacent cameras. Automatic stitching at start of scan ensures that each camera captures the correct number of pixels independently of mechanical and thermal changes.

<i>Subtractive Colors:</i>	The subtractive primary colors: cyan, magenta, yellow. As ink applied to a piece of paper by a printer, these colors absorb light and alter the colors seen by looking at the printed paper. Cyan ink absorbs the red third of the spectrum, magenta ink absorbs the green third, and yellow ink absorbs the blue third. This should theoretically cause the viewer to see a black color, but due to unavoidable impurities in the inks, there is still light reflected and the viewer sees a muddy brown. The absence of CMY pigments results in white.
<i>TIFF:</i>	Tagged Image File Format. One of the most common graphic file formats for line-art and photographic images.
<i>Tonal Distribution:</i>	Tonal Distribution describes the distribution of various bright or dark tones within an image. During the scanning or image editing stage, tones can be redistributed, lightening a dark image or darkening a light one.
<i>Tone Compression:</i>	A term used in scanning and image editing that refers to compressing the broad range of tones and colors in an image down to the narrower range available on a printer.
<i>Tone Curves:</i>	The shape of the tone transfer curves can be adjusted by the user to alter color or tone correction. The lower left end of the curve typically represents the dark portions of a picture and an upward bend will typically lighten the shadows. Similar capabilities exist by working with the middle or highlight parts of the curve. In this way it is possible to alter only certain tonal ranges of an image without making un-wanted changes to other parts of the image.
<i>Tone:</i>	Any color or neutral that is denser than white.
<i>True color:</i>	True color systems provide eight bits for each of the three components (red, green and blue). Therefore true color is often referred to as 24-bit color.
<i>TWAIN:</i>	A standard method of communications that programs can use to send instructions to hardware (such as scanners) and receive data back from them (such as pictures).
<i>UCR:</i>	Under Color Removal. A color separation setting used on color photographs where cyan, magenta and yellow inks are removed from dark, neutral areas and substituted by black ink. The advantages are a reduction in overall ink usage. See also GCR.
<i>Vector Drawing:</i>	Also called Vector File. Consists of mathematically defined elements, such as "Line from A to B", "Circle with centre and radius", etc. CAD systems use vector drawings because of their accuracy, relatively low memory requirement and data-file sizes compared to raster images.

<i>Vector File:</i>	Also called Vector Drawing. Consists of mathematically defined elements such as: Line from A to B, Circle with centre and radius etc. CAD systems use vector drawings because of their accuracy and relatively low memory and data file sizes compared to raster images.
<i>Vectorization:</i>	Also called raster-to-vector conversion (RTV). The process of automatically converting a raster (bit-mapped) image into a vector (CAD) drawing.
<i>White Level:</i>	White Level is a setting in scan programs used if one has an original with a background that is not completely white. To get the background to appear as pure white one can set the White Level to a lower value.
<i>White Point Adjustment</i>	An adjustment made that will determine the amount of highlight detail in an image. The white point should be set so that the lightest part of an image will only just have zero detail.
<i>XYZ</i>	The CIE system is based on the description of color as a brightness (luminance) component Y (as described above), and two additional components X and Z. The spectral weighting curves of X and Z have been standardized by the CIE, based on statistics from experiments involving human observers. XYZ tri-stimulus values can describe any color.
<i>Zoom:</i>	The ability to enlarge or shrink the view of the picture in a window. Zoom does not alter the size of the final scanned picture; it only provides a better view while creating a selection border on the screen.

6. Error Codes

Software Related Errors

<i>System Error:</i>	262-51
<i>Description:</i>	Error closing file, corrupted image.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Image size and resolution exceeds file format limitations. Reduce resolution or image size
<i>System Error:</i>	55-101
<i>Description:</i>	No scanner found.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Check that the scanner is properly connected and turned on.• Reboot the system.
<i>System Error:</i>	55-121
<i>Description:</i>	Unknown error.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Restart the system.
<i>System Error:</i>	55-302
<i>Description:</i>	Failed to initialize Basic Calibration.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Check sheet, pressure rollers and glass plate.• Clean if needed.
<i>System Error:</i>	55-319
<i>Description:</i>	The calibration sheet was not recognized as the right sheet for this scanner.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Please check that the correct sheet is being used.• Inspect the sheet for scratches or wear, and replace it if the problem continues.
<i>System Error:</i>	55-351
<i>Description:</i>	CIS Alignment and Stitching Failed.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Please check sheet.
<i>System Error:</i>	55-503
<i>Description:</i>	Color calibration failed.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Please clean scanner.• Please run application again.• Inspect the sheet for scratches or wear, and replace it if the problem continues.

<i>System Error:</i>	55-509
<i>Description:</i>	IT8 file is not accessible.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• If you have received a new Calibration Sheet, please allow application to find reference file over the internet.• If problem persists reinstall the software to correct the issue.
<i>System Error:</i>	55-513
<i>Description:</i>	The IT8 reference file could not be found on the internet.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Browse to it manually www.contex.com and retrieve the correct IT8 file or use standard.
<i>System Error:</i>	55-523
<i>Description:</i>	Sheet not recognized.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Please clean scanner.• Please run application again.• Inspect the sheet for scratches or wear, and replace it if the problem continues.
<i>System Error:</i>	55-530
<i>Description:</i>	When checking new calibration the result was not within the limits.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Inspect the sheet for scratches or wear, and replace it if the problem continues.
<i>System Error:</i>	55-611
<i>Description:</i>	Unknown Scanner Status Error
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Reboot system.
<i>System Error:</i>	55-613
<i>Description:</i>	No paper was detected in the scanner.
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Place the correct sheet in the scanner.

Scanner Related Errors

Error Code: **100-50122**
Keypad Error Code: None
Level: RD Correctable
Description: Pop request failed, position unknown
Potential Failed Component: External, Firmware
Corrective Action:

- PC (cable, PC hardware/software etc.)
- Firmware.

Error Code: **100-50123**
Keypad Error Code: None
Level: RD Correctable
Description: Pop request failed, invalid command.
Potential Failed Component: External, Firmware
Corrective Action:

- PC (cable, PC hardware/software etc.)
- Firmware.

Error Code: **100-00119**
Keypad Error Code: None
Level: RD Correctable
Description: Invalid SCSI command
Potential Failed Component: External, Firmware
Corrective Action:

- PC (cable, PC hardware/software etc.)
- Firmware.

Error Code: **100-00120**
Keypad Error Code: None
Level: RD Correctable
Description: Invalid value in SCSI CDB
Potential Failed Component: External, Firmware
Corrective Action:

- PC (cable, PC hardware/software etc.)
- Firmware.

<i>Error Code:</i>	100-00121
<i>Keypad Error Code:</i>	None
<i>Level:</i>	RD Correctable
<i>Description:</i>	Invalid SCSI parameter list length.
<i>Potential Failed Component:</i>	External, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • PC (cable, PC hardware/software etc.) • Firmware.
<i>Error Code:</i>	100-00123
<i>Keypad Error Code:</i>	None
<i>Level:</i>	RD Correctable
<i>Description:</i>	Unsupported SCSI parameter
<i>Potential Failed Component:</i>	External, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • PC (cable, PC hardware/software etc.) • Firmware.
<i>Error Code:</i>	100-00124
<i>Keypad Error Code:</i>	None
<i>Level:</i>	RD Correctable
<i>Description:</i>	Invalid SCSI parameter value
<i>Potential Failed Component:</i>	External, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • PC (cable, PC hardware/software etc.) • Firmware.
<i>Error Code:</i>	100-00125
<i>Keypad Error Code:</i>	None
<i>Level:</i>	RD Correctable
<i>Description:</i>	Incorrect scanner status. Please check the paper path and reload the media.
<i>Potential Failed Component:</i>	External, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • PC (cable, PC hardware/software etc.) • Firmware.
<i>Error Code:</i>	100-00126
<i>Keypad Error Code:</i>	None
<i>Level:</i>	RD Correctable
<i>Description:</i>	SCSI time-out.
<i>Potential Failed Component:</i>	External, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • PC (cable, PC hardware/software etc.) • Firmware.

<i>Error Code:</i>	100-00127
<i>Keypad Error Code:</i>	None
<i>Level:</i>	User Correctable
<i>Description:</i>	The scanner keyboard was used during communication with the scanner.
<i>Potential Failed Component:</i>	User
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-00128
<i>Keypad Error Code:</i>	None
<i>Level:</i>	User Correctable
<i>Description:</i>	The scanner has paper jam. Please reload the media.
<i>Potential Failed Component:</i>	User, Mech, LMx, SMPS, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction. • Related mechanical parts. • Lamp and Motor driver board (LMx). • Switch Mode Power Supply (SMPS). • Main controller board (SUx).
<i>Error Code:</i>	100-00129
<i>Keypad Error Code:</i>	None
<i>Level:</i>	User Correctable
<i>Description:</i>	The scanner does not support this test command in normal mode. Please restart test program.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-00131
<i>Keypad Error Code:</i>	None
<i>Level:</i>	User Correctable
<i>Description:</i>	The scanner is initializing. Please retry the operation when the scanner has finished initializing.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.

<i>Error Code:</i>	100-00132
<i>Keypad Error Code:</i>	None
<i>Level:</i>	User Correctable
<i>Description:</i>	The scanner is warming up. Please retry the operation when the scanner has finished warming up.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-50231
<i>Keypad Error Code:</i>	BOOT (1)
<i>Level:</i>	RD Correctable
<i>Description:</i>	Firmware download is in progress
<i>Potential Failed Component:</i>	Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Firmware.
<i>Error Code:</i>	100-50232
<i>Keypad Error Code:</i>	ERR_GENERAL (3)
<i>Level:</i>	User Correctable
<i>Description:</i>	Firmware is incomplete. Please download new firmware.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-50234
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner is in safemode. Please reboot scanner or download new firmware.
<i>Potential Failed Component:</i>	User, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction. • Main controller board (SUx).
<i>Error Code:</i>	100-50237
<i>Keypad Error Code:</i>	ERR_GENERAL (3)
<i>Level:</i>	User Correctable
<i>Description:</i>	Host PC does not support SSE2 calculations.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.

Error Code: **100-20088**
Keypad Error Code: ERR_GENERAL (3)
Level: Support Correctable
Description: Motor system error, motor movement not detected.
Potential Failed Component: Mech, SUx, Cable, Motor
Corrective Action:

Error Code: **100-50259**
Keypad Error Code: ERR_SU (12)
Level: Support Correctable
Description: Firmware unable to identify SU-board id.
Potential Failed Component: SUx
Corrective Action:

- Main controller board (SUx).

Error Code: **100-50260**
Keypad Error Code: ERR_SU (12)
Level: Support Correctable
Description: Firmware unable to identify SU-board variant.
Potential Failed Component: SUx
Corrective Action:

- Main controller board (SUx).

Error Code: **100-50600**
Keypad Error Code: ERR_SU (12)
Level: Support Correctable
Description: SUx, Main controller board error
Potential Failed Component: SUx, SMPS
Corrective Action:

- Main controller board (SUx).
- Switch Mode Power Supply (SMPS).

Error Code: **100-50601**
Keypad Error Code: ERR_CB (13)
Level: Support Correctable
Description: CIS unit error
Potential Failed Component: CIS, SUx
Corrective Action:

- CIS Unit (CIS).
- Main controller board (SUx).

<i>Error Code:</i>	100-50602
<i>Keypad Error Code:</i>	ERR_GENERAL (3)
<i>Level:</i>	User Correctable
<i>Description:</i>	Firmware error. Please download latest firmware.
<i>Potential Failed Component:</i>	Firmware, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Firmware. • Main controller board (SUx).
<i>Error Code:</i>	100-50603
<i>Keypad Error Code:</i>	ERR_GENERAL (3)
<i>Level:</i>	User Correctable
<i>Description:</i>	Unrecoverable scanner state. Please reboot the scanner. Download of the latest firmware and PC application/driver may be required.
<i>Potential Failed Component:</i>	Reboot, Firmware, Software
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Reboot scanner. • Firmware. • PC driver/software.
<i>Error Code:</i>	100-50700
<i>Keypad Error Code:</i>	ERR_SMC (17)
<i>Level:</i>	User Correctable
<i>Description:</i>	The scanner needs to be activated.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-50701
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner serial does not match.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-50702
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner main board ID does not match.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.

<i>Error Code:</i>	100-50703
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner Activation code has expired (sac).
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-50704
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner firmware does not support one or more features.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.
<i>Error Code:</i>	100-50265
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, ETH internal DMA error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).
<i>Error Code:</i>	100-50266
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, ETH internal DMA error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).
<i>Error Code:</i>	100-50267
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, ETH PHY internal I/F error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).

<i>Error Code:</i>	100-50268
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	SUx, ETH PHY loopback error
<i>Potential Failed Component:</i>	SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Main controller board (SUx).
<i>Error Code:</i>	100-50269
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, Flash error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).
<i>Error Code:</i>	100-50270
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, RAM error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).
<i>Error Code:</i>	100-50271
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	SUx, Scanner has no MAC address
<i>Potential Failed Component:</i>	SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Main controller board (SUx).
<i>Error Code:</i>	100-50705
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner serial cannot be changed while activated.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.

<i>Error Code:</i>	100-50218
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	RD Correctable
<i>Description:</i>	Data never arrives in the Image
<i>Potential Failed Component:</i>	Buffer, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Firmware.
<i>Error Code:</i>	100-50269
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, Flash error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).
<i>Error Code:</i>	100-50270
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	IMx, RAM error
<i>Potential Failed Component:</i>	IMx, SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Interface board (IMx). • Main controller board (SUx).
<i>Error Code:</i>	100-50271
<i>Keypad Error Code:</i>	ERR_SU (12)
<i>Level:</i>	Support Correctable
<i>Description:</i>	SUx, Scanner has no MAC address
<i>Potential Failed Component:</i>	SUx
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • Main controller board (SUx).
<i>Error Code:</i>	100-50705
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	User Correctable
<i>Description:</i>	Scanner serial cannot be changed while activated.
<i>Potential Failed Component:</i>	User.
<i>Corrective Action:</i>	<ul style="list-style-type: none"> • User interaction.

<i>Error Code:</i>	100-50218
<i>Keypad Error Code:</i>	None.
<i>Level:</i>	RD Correctable
<i>Description:</i>	Data never arrives in the Image
<i>Potential Failed Component:</i>	Buffer, Firmware
<i>Corrective Action:</i>	<ul style="list-style-type: none">• Firmware.

7. Scanner License

Scanner License System, General


Brief description of how the Scanner License works.

- Replacing Main Board
- Temporary Board Swap
- Problem with Activation


Main Board Replacement

Prerequisites:


- After the Main Board has been replaced and it has been verified that the scanner is now working correct, the scanner needs to be reactivated.

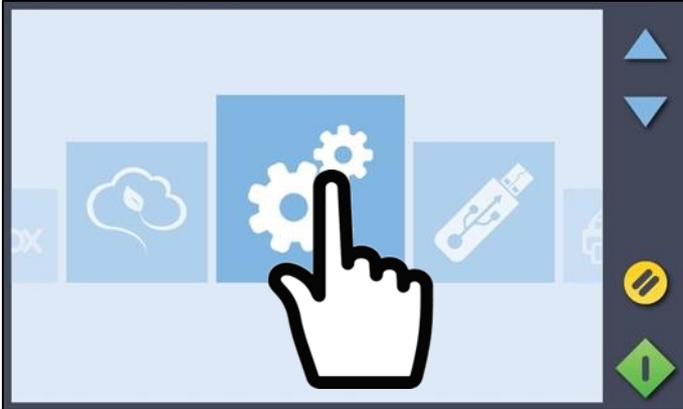


1. When the scanner boots up and the scanner is recognized by the PC. Scroll to the Tools Icon.

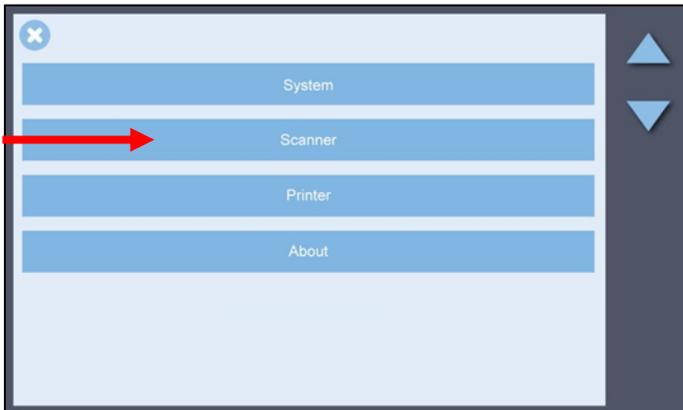

2. Click 'Scanner'.

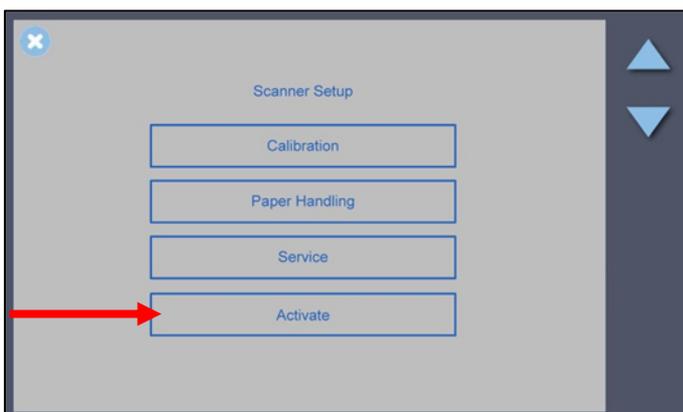

3. Click 'Activate'.

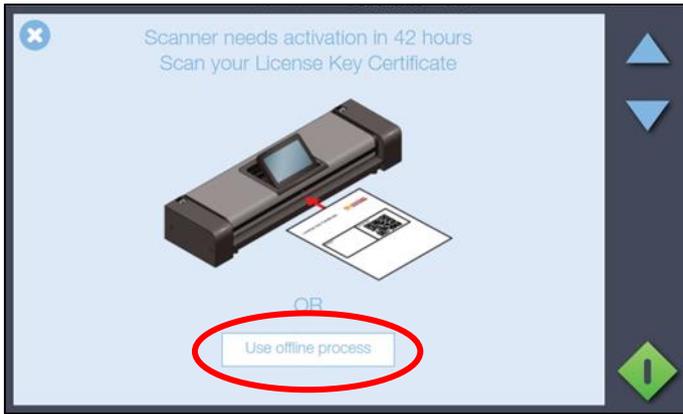

4. Manually active, use the 'offline process' button



5. Type in the serial no. from the back of the scanner.



6. Take a note of the ID code, and go to www.license.contex.com and use the 'reactivation' tab, following all instructions.

License Activation

Please complete the form below

Activation information

(*) marks required fields

Serial Number or Hardware ID *

License Key*

Contact Information

Company Name

First Name

Last Name

Email

City

Postal Code

Country

State

I would like to receive product news and technical information

[Click here to help us learn more about your needs](#)

[Privacy Policy Statement](#)

Support
[Need to deactivate your scanner?](#)
[Replaced board in your scanner?](#)

By filling in this form you accept that Global Scan

[Privacy Policy Statement](#)

Support
[Need to deactivate your scanner?](#)
[Replaced board in your scanner?](#)

7. Click "Replaced board in your scanner"

Scanner Reactivation

Reactivation after board replacement

Reactivation information

(*) marks required fields

Hardware ID*

Contact Information

Company Name

First Name

Last Name

Email

City

Postal Code

Country

State

I would like to receive product news and technical information

[Click here to help us learn more about your needs](#)

[Privacy Policy Statement](#)

- 8. Paste in the HW id.
- 9. Fill in the Company info.
- 10. Click Reactivate.

Enter activation code

1	2	3	4	5	6	7	8	9	0	-	=	←	
Tab	q	w	e	r	t	y	u	i	o	p	[]	\
Caps	a	s	d	f	g	h	j	k	l	;	'	Enter	
Shift	z	x	c	v	b	n	m	,	.	/	@	Shift	
←	△	Eng							AltGr	▽	→		


OK

11. Copy the Activation code.


Setting the Serial Number

Prerequisites:


- If a Controller Board wasn't new on install, the serial number of the scanner needs to be set before activation.
- The scanner needs to be connected to a PC, with WIDEsystem running to carry to this instruction

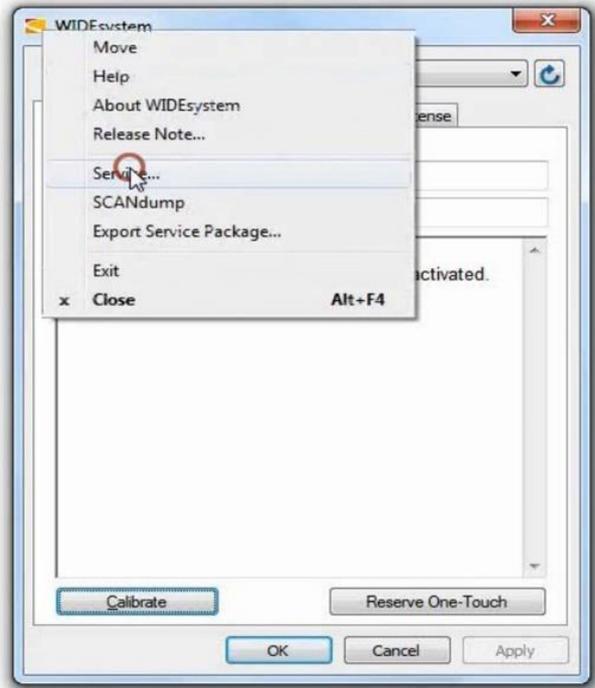



1. Right click in the top left corner of WIDEsystem to open the engineering menu.

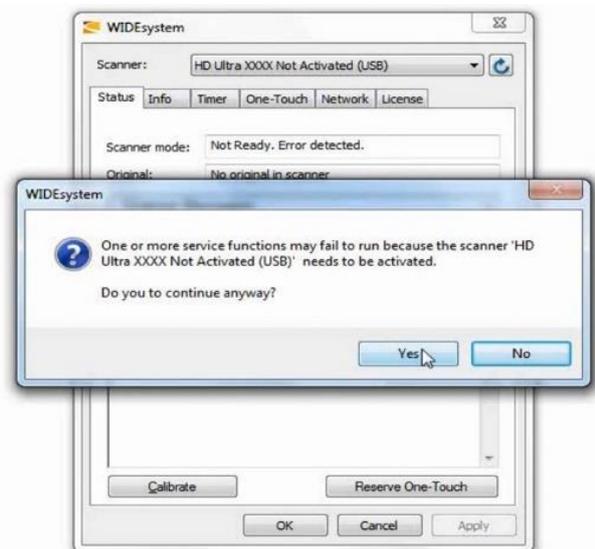


2. Acknowledge that the scanner isn't activated if necessary.

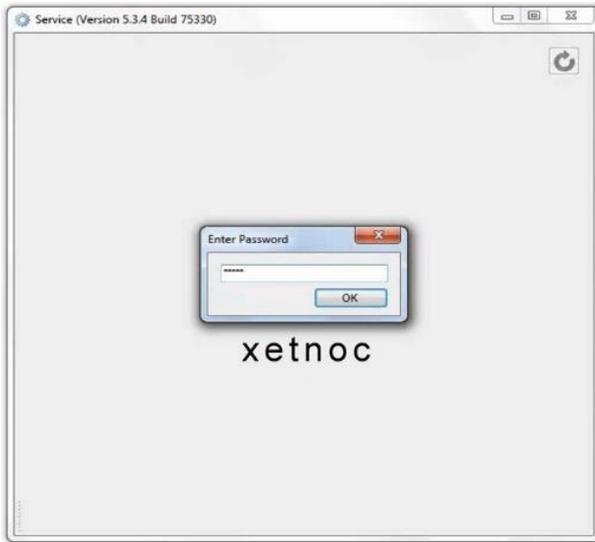

3. Enter the password to access the engineering menu.

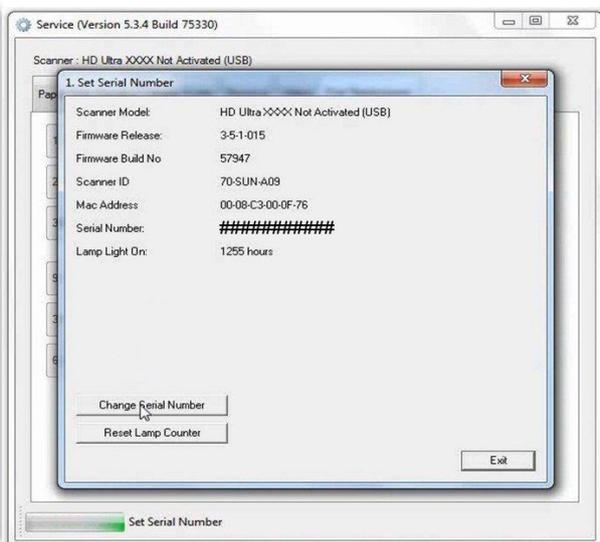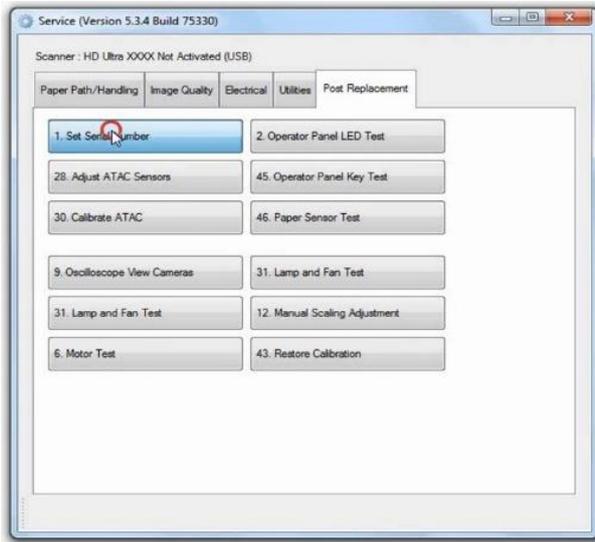

4. Enter the 'Set Serial Number' option.

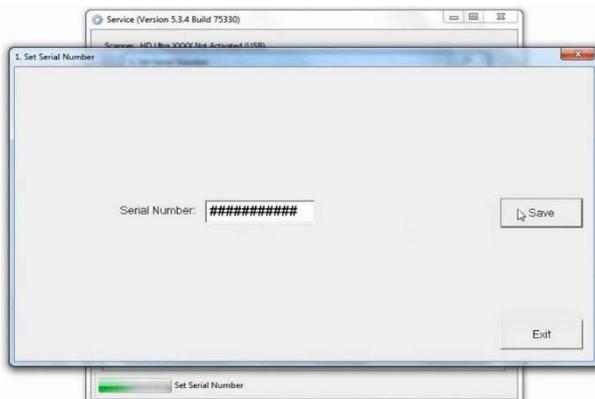

5. Enter the serial number, found on the rear of the scanner, and press save

6. Activate the scanner, if necessary.

Temporary Board Swap

If you do not have a spare board to fix the scanner or you just want to make sure that a new main board will fix the issue, you can temporarily use a main board from another scanner of the same scanner type, without changing model or serial number. However, once you confirm the main board needs to be replaced and you have ordered a new spare part, you will then be required to go through the Activation Wizard.

Problem with Activation

If the wrong License key has been accidentally merged with a new scanner, you will have to contact Support to solve the problem.

Please contact support@contex.com with the following info.

Customer Name:

Customer email:

Scanner Serial no:

License key:

Activation code: