

# HOFTRONIC™

## DATASHEET LED T8 ALU TUBES 150CM

140 LM/WATT



### Specifications

	SKU 416406	SKU 415492	SKU 415485
Input power	100-240V AC	100-240V AC	100-240V AC
Watts	25 Watt	25 Watt	25 Watt
Equivalent watts	90 Watt	90 Watt	90 Watt
Luminous flux	3500 Lumen	3500 Lumen	3500 Lumen
Light color	Daylight white	Neutral white	Warm white
Color temperature	6000K	4000K	3000K
Color rendering index (CRI)	>80	>80	>80
Beam angle	140°	140°	140°
Powerfactor	>0.95	>0.95	>0.95
Energy label	A++	A++	A++
IP-rate	IP20	IP20	IP20
Dimmable	No	No	No
Material	Aluminum, Polycarbonate	Aluminum, Polycarbonate	Aluminum, Polycarbonate
Dimensions	1498 x 26 mm	1498 x 26 mm	1498 x 26 mm
Operation temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
Switching cycles	100.000 cycles	100.000 cycles	100.000 cycles
Life span	50.000 hours	50.000 hours	50.000 hours
Certification	CE, EMC, RoHS, TÜV, LM80	CE, EMC, RoHS, LM80	CE, EMC, RoHS, LM80
Warranty	5 years	5 years	5 years
EAN	7439628416406	7439628415492	7439628415485




# HOFTRONIC™

## DATASHEET LED T8 ALU TUBES 150CM

140 LM/WATT




### Specification

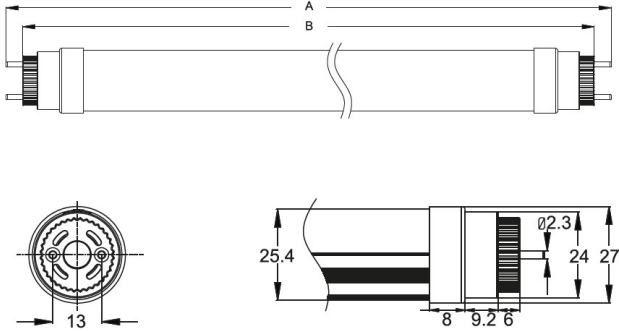

	2feet	3feet	4feet	5feet
	588	892	1198	1498
	Dimension	Dimension	Dimension	Dimension
A:	602mm	906mm	1213mm	1513mm
B:	588mm	892mm	1198mm	1498mm

### Beam angle

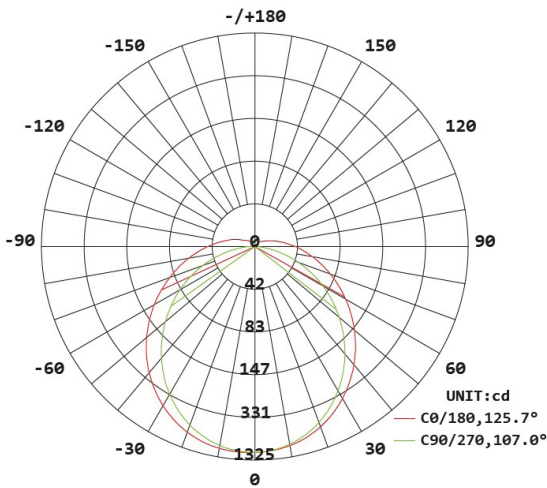

### Illumination Distribution Drawing

