

HOFTRONIC™

DATASHEET LED T8 ALU TUBES 60CM

160 LM/WATT



Specifications

	SKU 416468	SKU 416451	SKU 416444
Input power	100-240V AC	100-240V AC	100-240V AC
Watts	9 Watt	9 Watt	9 Watt
Equivalent watts	36 Watt	36 Watt	36 Watt
Luminous flux	1440 Lumen	1440 Lumen	1440 Lumen
Light color	Daylight white	Neutral white	Warm white
Color temperature	6000K	4000K	3000K
Color rendering index (CRI)	>80	>80	>80
Beam angle	140°	140°	140°
Powerfactor	>0.95	>0.95	>0.95
Energy label	A++	A++	A++
IP-rate	IP20	IP20	IP20
Dimmable	No	No	No
Material	Aluminum, Polycarbonate	Aluminum, Polycarbonate	Aluminum, Polycarbonate
Dimensions	588 x 26 mm	588 x 26 mm	588 x 26 mm
Operation temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
Switching cycles	100.000 cycles	100.000 cycles	100.000 cycles
Life span	50.000 hours	50.000 hours	50.000 hours
Certification	CE, EMC, RoHS, TÜV, LM80	CE, EMC, RoHS, TÜV, LM80	CE, EMC, RoHS, TÜV, LM80
Warranty	5 years	5 years	5 years
EAN	7439628416468	7439628416451	7439628416444




HOFTRONIC™

DATASHEET LED T8 ALU TUBES 60CM

160 LM/WATT




Specification

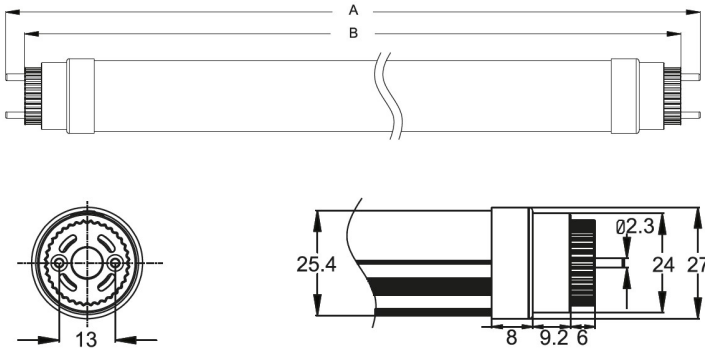


	2feet	3feet	4feet	5feet
	588	892	1198	1498
	Dimension	Dimension	Dimension	Dimension
A:	602mm	906mm	1213mm	1513mm
B:	588mm	892mm	1198mm	1498mm

Beam angle

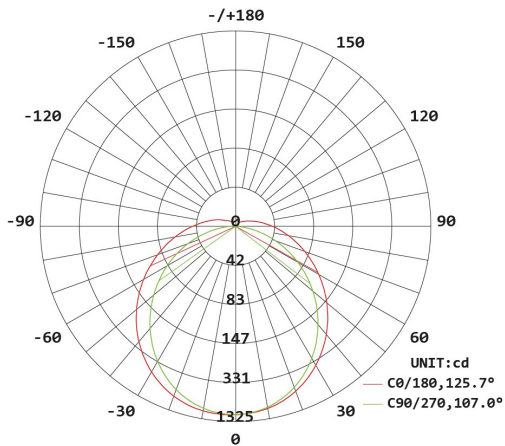

Illumination Distribution Drawing

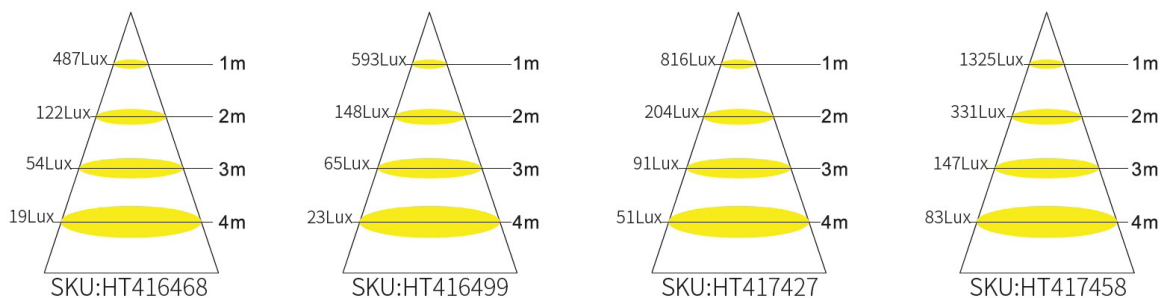

V.01

10052021

Subject to changes without notice and errors. Please ensure that you always use the latest version.

©2021 HOF Trading B.V. | Fahrenheitstraat 11, 6003 DC Weert | The Netherlands. All rights reserved.

