

# VT2000



## VT2000

### FORWARD-FACING VEHICLE CCTV

The **VT2000** is a full HD 1080p connected vehicle telematics camera, featuring instant remote Cloud upload, live view snapshots, health-checking, built-in GPS/GLONASS and G-shock sensor, designed to deliver high-quality videos of incidents instantly to our data platform.



### Key features:

Industry-leading, connected and HD-quality vehicle camera and telematics system



Provides First Notification of Loss (FNOL) alerts

High-quality super-wide viewing angle



Accurate G-shock sensor measures impact force and driving style

Provides HD images before, during and after an incident



Built-in GPS and GLONASS receiver with self-checking notifications


Monitor driver behaviour from anywhere using the VisionTrack IoT platform



Fully lockable tamper-proof case



**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com

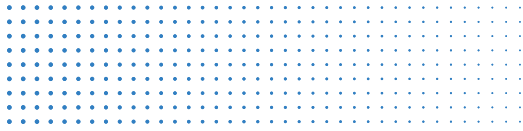

## VT2000

### Specifications:

<b>Image sensor</b>	1/3" 3-megapixel CMOS sensor
<b>DSP</b>	Standard DSP
<b>Angle of view</b>	170° (H: 139.5, V: 71.5, +5%)
<b>Band support</b>	WCDMA Band1 (2,100MHz)/ Band8 (900MHz)
<b>Max data rate</b>	UL: 5.76Mbps, DL: 7.2Mbps
<b>Video resolution</b>	1080P HD (1920x1080) 720P (1280x720), VGA (640x480)
<b>Recording speed</b>	Up to 30 fps
<b>Recording mode</b>	Continuous , Event, Dual-mode Supports cards (Class 10) up to 128GB (codec encrypted)
<b>Memory</b>	Cloud Storage – Microsoft Azure - ISO 27001, HIPAA, FedRAMP, SOC 1 and SOC 2 accredited
<b>GPS/GLONASS</b>	Internal GPS /GLONASS
<b>G-sensor</b>	Internal 3-axis G-sensor
<b>Gyro</b>	3-axis (X,Y,Z), output rate: 100 Hz,
<b>RTC</b>	Internal battery
<b>Speaker</b>	Recording start, error
<b>Alarm In/Out</b>	2 x Alarm In, 1 x Alarm Out
<b>LED</b>	Record (Blue LED), Communication (Red LED)
<b>Super capacitor</b>	Enable recording of last file and shut down
<b>Power input</b>	12V to 24V DC permanent wiring kit input voltage: DC 5V, 3A
<b>Delayed power shutdown</b>	Supports delayed power shutdown
<b>Power consumption</b>	15W
<b>Size / weight</b>	91mm x 56mm x 56mm (w/o bracket) , 150g
<b>Operation temp.</b>	-10C~55C

**t** +44 (0) 1246 225 745

**e** info@visiontrack.com

**W** visiontrack.com

**S** support.visiontrack.com