

Product Technical Data Sheet:

Metal Barbed Cable Ties


Description

Partex Metal barbed cable ties have a stainless steel tooth which retains the tie securely at the desired position. The smooth tie strap remains flexible and resistant at low temperatures and in humidity free conditions.

Specification

Material:	Nylon 6.6 Polyamide
Flammability:	Self-extinguishing to UL 94-V2
Work Temperature:	-40°C to +85°C
Recommended storage conditions:	+15°C to +30°C 50% Relative Humidity.
Shock indent Impact:	16 Kj/m ²
Flexural Modulus:	2750 Mpa
Elongation at break:	70%
Water absorption:	2.5% at 23°C and 50% Relative Humidity

Good resistance to solvents and reagents, oil, petrol and hydrocarbons.
Not resistant to mineral acids or oxidising agents.

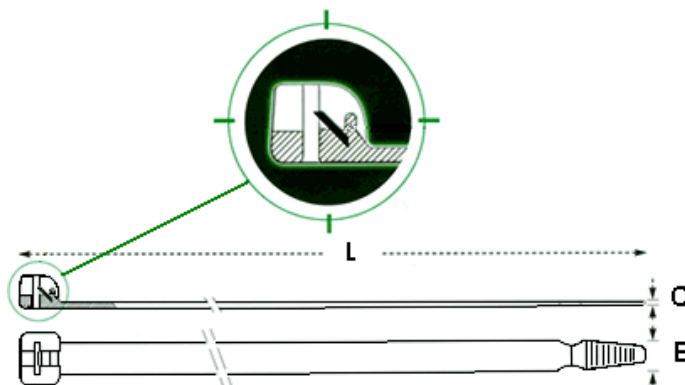

Partex Part No	Length (mm) L	Width (mm) B	Thickness (mm) C	Max Bundle Diameter (mm)	Min Tensile Strength (kg)	Colour	Pack Qty
MB100 B	100	2.5	0.9	24	18	Black	1000
MB100 N	100	2.5	0.9	24	18	Natural	1000
MB140 B	140	3.5	1.0	36	28	Black	1000
MB140 N	140	3.5	1.0	36	28	Natural	1000
MB200I B	200	3.5	1.0	55	28	Black	100
MB200I N	200	3.5	1.0	55	28	Natural	100
MB200 B	186	4.5	1.1	51	40	Black	100
MB200 N	186	4.5	1.1	51	40	Natural	100
MB300 B	290	4.5	1.1	76	40	Black	100
MB300 N	290	4.5	1.1	76	40	Natural	100
MB365 B	360	4.5	1.1	101	40	Black	100
MB365 N	360	4.5	1.1	101	40	Natural	100

Partex Marking Systems (UK) LTD

61-64 Station Road, Coleshill, Birmingham B46 1JT

Tel: 01675 463670 Fax: 01675 463520 Email: sales@partex.co.uk