

## NYLON CABLE TIES



### + INFORMATION

- + Self-locking with high fixing strength.
- + Available for indoor and outdoor installation.
- + Manufactured in accordance with MIL standard M20693B and in conformity with UL94V-2.
- + An extensive range of products to suit many applications.

### + PROPERTIES

#### Temperature range

-40°C to +85°C

#### Material

Nylon 6.6, in accordance with UL94-V2  
UV resistant ties are also available.

#### Standard colour


Black and Natural.

#### Chemical resistance

high resistance to brake fluids, lubricants, power steering fluids, oil, grease, paints, lacquers, detergents, animal and vegetable fats, gasoline and alkalis up to 40%.



Items marked # are pending approval.

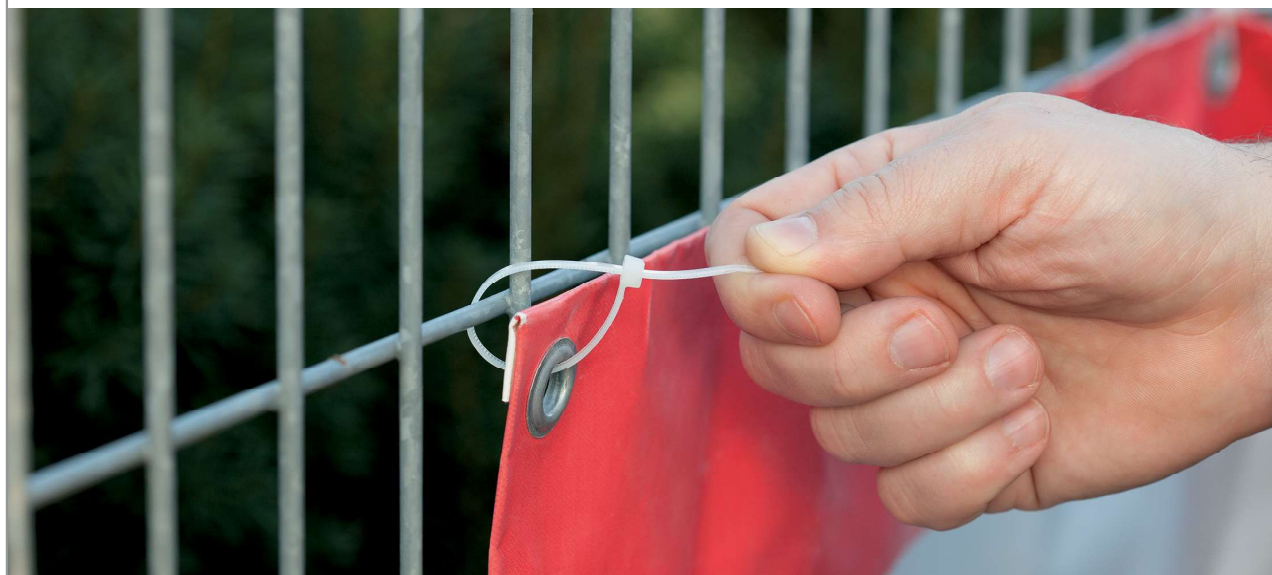

+ DIMENSIONS AND PACKAGING

Non-Releaseable Nylon 6.6 Cable Ties

| TYPE        | LENGTH (mm) | WIDTH (mm) | MAX BUNDLE DIAMETER (mm) | MIN. TENSILE STRENGTH (kg) | PACKAGING   |
|-------------|-------------|------------|--------------------------|----------------------------|-------------|
| HFC 80      | 80          | 2.5        | 15                       | 8                          | 100 or 1000 |
| HFC 100     | 100         | 2.5        | 18                       | 8                          | 100 or 1000 |
| HFC 120     | 120         | 4.8        | 24                       | 22                         | 100 or 1000 |
| HFC 140     | 140         | 3.6        | 33                       | 18                         | 100 or 1000 |
| HFC 160     | 160         | 4.8        | 38                       | 22                         | 100 or 1000 |
| HFC 200     | 200         | 4.8        | 50                       | 22                         | 100 or 1000 |
| HFC 250     | 250         | 4.8        | 63                       | 22                         | 100         |
| HFC 300     | 300         | 4.8        | 76                       | 22                         | 100         |
| HFC 365     | 365         | 4.8        | 102                      | 22                         | 100         |
| HFC 430     | 430         | 4.8        | 110                      | 22                         | 100         |
| HFC 530     | 530         | 4.8        | 140                      | 22                         | 100         |
| HFC 160L    | 160         | 2.5        | 40                       | 8                          | 100 or 1000 |
| HFC 200L    | 200         | 2.5        | 50                       | 8                          | 100 or 1000 |
| HFC 200I    | 200         | 3.6        | 50                       | 18                         | 100 or 1000 |
| HFC 300L    | 300         | 3.6        | 76                       | 18                         | 100         |
| HFC 150H    | 150         | 7.6        | 36                       | 55                         | 100         |
| HFC 200H    | 200         | 7.6        | 50                       | 55                         | 100         |
| HFC 240H #  | 240         | 7.6        | 66                       | 55                         | 100         |
| HFC 300H    | 300         | 7.6        | 76                       | 55                         | 100         |
| HFC 370H    | 370         | 7.6        | 100                      | 55                         | 100         |
| HFC 430H    | 430         | 9.0        | 110                      | 75                         | 100         |
| HFC 530H    | 530         | 9.0        | 140                      | 75                         | 100         |
| HFC 710H    | 710         | 9.0        | 190                      | 75                         | 100         |
| HFC 940H    | 940         | 9.0        | 280                      | 75                         | 100         |
| HFC 1220H # | 1220        | 9.0        | 365                      | 75                         | 100         |
| HFC 580EH   | 580         | 12.7       | 152                      | 113                        | 100         |

Available in both black and natural, please specify required colour when ordering.

