


Blade Terminals

Terminal Material: C1100 Copper

Insulation Material: Polyvinyl Chloride (PVC)

Plating: Electro-Tinned

Maximum Temperature: 167° F

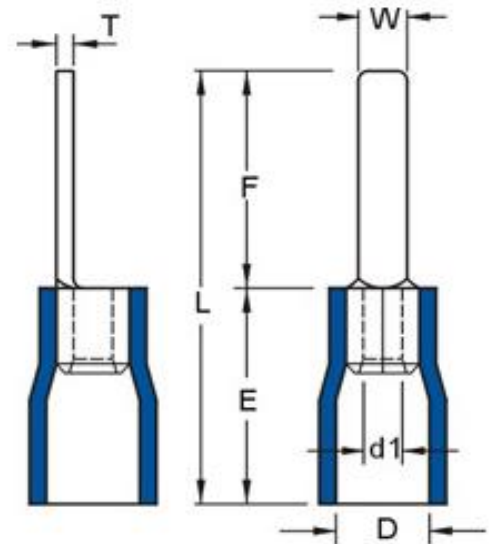

Color	Wire Size	PARTEX Part No.	Dimensions (in)							Current	Voltage
			T	L	W	F	E	D	d1		
RED	22-16 AWG 0.5-1.5mm ²	RB11	0.030	0.846	0.118	0.433	0.413	0.169	0.067	12 AMPS	600V
		RB14		0.984	0.118	0.551					
		RB18		1.122	0.096	0.709					
Color	Wire Size	PARTEX Part No.	Dimensions (in)							Current	Voltage
			T	L	W	F	E	D	d1		
BLUE	16-14 AWG 1.5-2.5mm ²	BB9	0.031	0.787	0.110	0.354	0.433	0.185	0.091	16 AMPS	600V
		BB18		1.142	0.096	0.709					
Color	Wire Size	PARTEX Part No.	Dimensions (in)							Current	Voltage
			T	L	W	F	E	D	d1		
YELLOW	12-10 AWG 4.0-6.0mm ²	YB10	0.039	0.945	0.110	0.394	0.551	0.264	0.134	24 AMPS	600V
		YB18		1.260	0.118	0.709					



Approvals:
E163810
E318463

Partex Marking Systems, Inc. | 1155 N. Main Street | Lombard, IL 60148
P: 630-516-0400 | F: 630-833-7631 | E-mail: Sales@partexmarker.com

