

Female Bullet


Fully Insulated

Terminal Material: C2680 Brass

Insulation Material: Polyvinyl Chloride (PVC)

Plating: Electro-Tinned

Maximum Temperature: 167° F

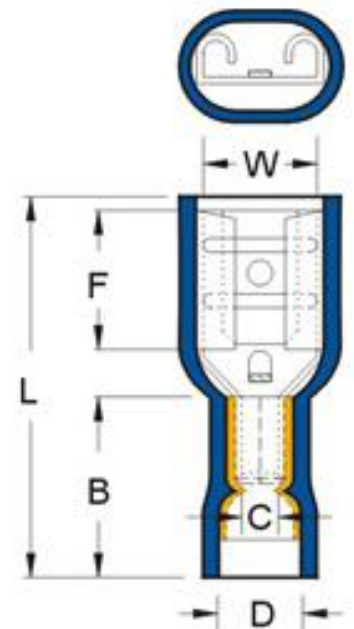

Color	Wire Size	PARTEX Part No.	Bullet Receptacle (in)	Dimensions (in)						Current	Voltage
				L	W	F	B	D	C		
RED	22-16 AWG 0.5-1.5mm ²	RFB40/VR	.157 FQC	0.965	0.154	0.276	0.413	0.169	0.067	12 AMPS	300V
Color	Wire Size	PARTEX Part No.	Bullet Receptacle (in)	Dimensions (in)						Current	Voltage
				L	W	F	B	D	C		
BLUE	16-14 AWG 1.5-2.5mm ²	BFB50/VR	.195 FQC	0.984	0.193	0.276	0.433	0.185	0.091	16 AMPS	300V
Color	Wire Size	PARTEX Part No.	Bullet Receptacle (in)	Dimensions (in)						Current	Voltage
				L	W	F	B	D	C		
YELLOW	12-10 AWG 4.0-6.0mm ²	YFB50/VR	.195 FQC	1.024	0.193	0.276	0.551	0.256	0.134	24 AMPS	300V



Approvals:
E163810
E318463

Partex Marking Systems, Inc. | 1155 N. Main Street | Lombard, IL 60148
P: 630-516-0400 | F: 630-833-7631 | E-mail: Sales@partexmarker.com



RoHS