


Male Tabs

Terminal Material: C2680 Brass

Insulation Material: Polyvinyl Chloride (PVC)

Plating: Electro-Tinned

Maximum Temperature: 167° F

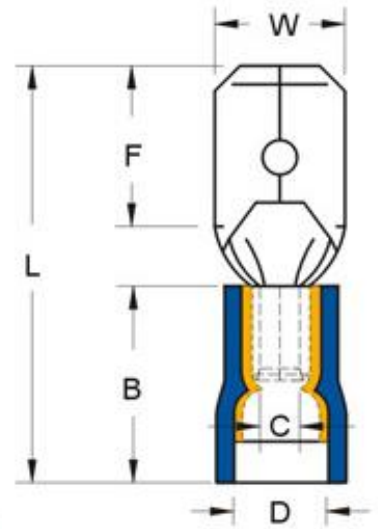

Color	Wire Size	PARTEX Part No.	Tab Size (in)	Dimensions (in)							Current	Voltage
				Thickness	L	W	F	B	D	C		
RED	22-16 AWG 0.5 - 1.5 mm ²	RM50/VR	.189 x .032	0.0315	0.866	0.189	0.354	0.413	0.161	0.067	10 AMPS	300V
		RM63/VR	.252 x .032			0.252					20 AMPS	
Color	Wire Size	PARTEX Part No.	Tab Size (in)	Dimensions (in)							Current	Voltage
				Thickness	L	W	F	B	D	C		
BLUE	16-14 AWG 1.5 - 2.5 mm ²	BM50/VR	.189 x .032	0.0315	0.886	0.189	0.354	0.433	0.185	0.091	16 AMPS	300V
		BM63/VR	.252 x .032			0.252					20 AMPS	
Color	Wire Size	PARTEX Part No.	Tab Size (in)	Dimensions (in)							Current	Voltage
				Thickness	L	W	F	B	D	C		
YELLOW	12-10 AWG 4.0 - 6.0 mm ²	YM63/VR	.252 x .032	0.0315	0.965	0.252	0.354	0.551	0.256	0.134	20 AMPS	300V



Approvals:
E163810
E318463

Partex Marking Systems, Inc. | 1155 N. Main Street | Lombard, IL 60148
P: 630-516-0400 | F: 630-833-7631 | E-mail: Sales@partexmarker.com

