



INFORMATION

- + Flat, thin-walled heat shrink made of halogen-free material.
- + High resistance to low and high temperature.
- + Very low gas emission in the event of fire.
- + Flame resistant.
- + 2:1 shrink ratio.
- + Ideal for heavy-duty industrial applications.
- + Fast and cheap marking on site with a printer from ParTex.



PROPERTIES

Temperature range

-55°C do +125°C

Material

Halogen free, self-extinguishing in accordance with ASTM D2671

Print


thermal transfer

Standard colours

yellow and white, other colours available on request


According to standard

AMS-DTL-23053 Class 1

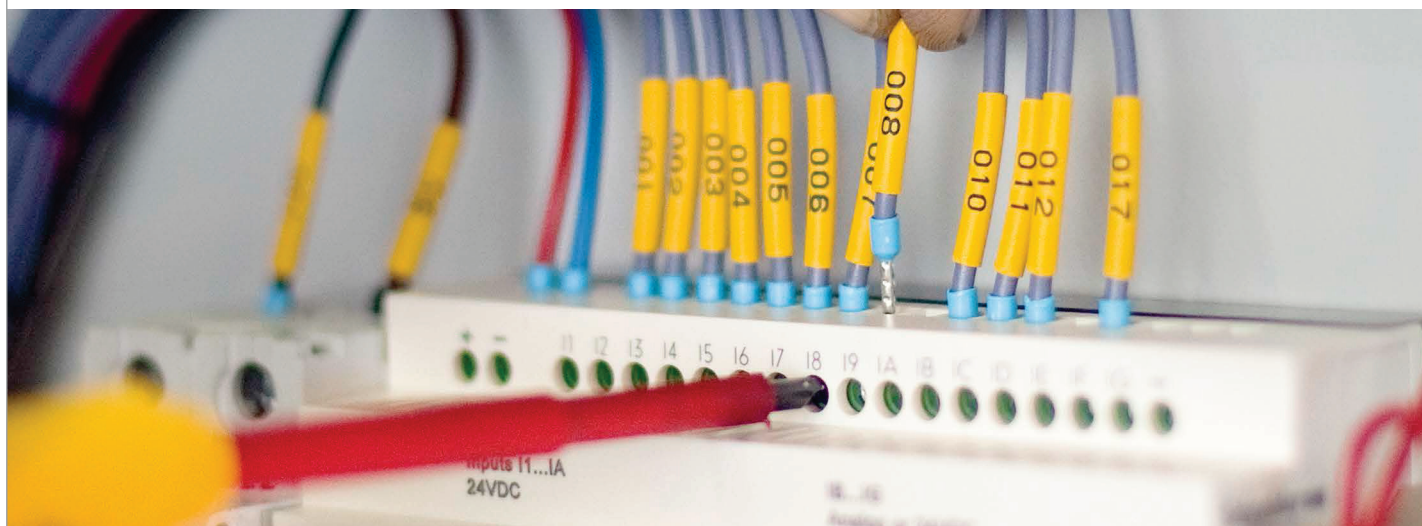

PHZF20127BN4

+ DIMENSIONS AND PACKAGING

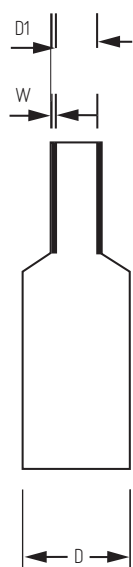

TYPE	DIAMETER [D mm]	DIAMETER [D1 mm]	THICKNESS [W mm]	PACKAGING	COMPATIBLE PRINTERS
PHZF20024	2.4	1.2	0.51	 25 m or 100 m	PROMARK-T1000 MK-10, MK10-DH
PHZF20032	3.2	1.6	0.51	 25 m or 100 m	
PHZF20048	4.8	2.4	0.51	 25 m or 100 m	
PHZF20064	6.4	3.2	0.64	 25 m or 100 m	
PHZF20095	9.5	4.8	0.64	 75 m	
PHZF20127	12.7	6.4	0.64	 50 m	
PHZF20191	19.1	9.5	0.77	 50 m	
PHZF20254	25.4	12.7	0.89	 50 m	
PHZF20381	38.1	19.1	1.02	 25 m	

+ RELATED PRODUCTS



PROMARK-T1000

▶ PAGE 102



MK10

▶ PAGE 108



MK10-DH

▶ PAGE 110

+ APPLICATION

