




INFORMATION

- + Closed, permanent grip and adjustable marking sleeves.
- + For applications including electrical engineering, pneumatics and hydraulics.
- + Twist-protection for secure combination marking
- + Excellent legibility

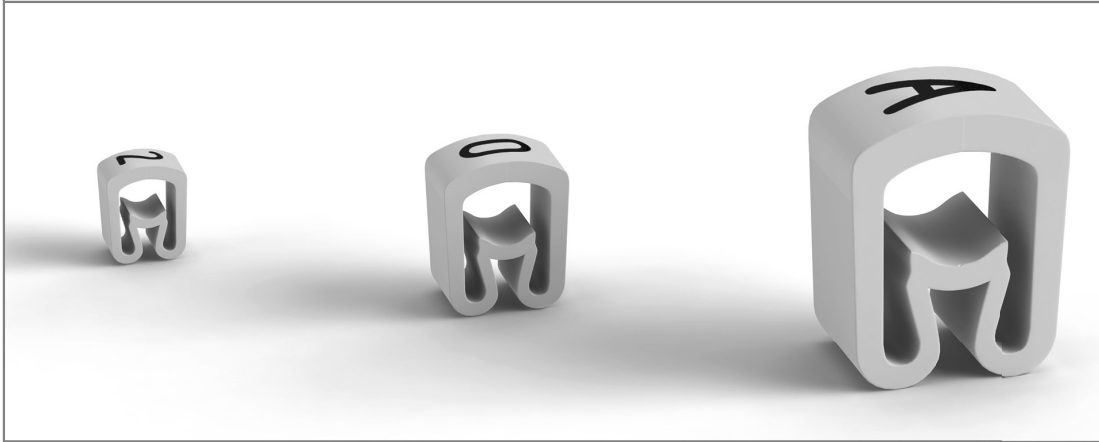

PROPERTIES

Temperature range
-30°C to +60°C

Material
PVC

Print
hot stamped


Standard colours
yellow and white
international colour code for 0-9

Text
0-9, A-Z, +, -, /, ., ~, ⚡





+ DIMENSIONS



TYPE	HEIGHT (H mm)	WIDTH (B mm)	TEXT HEIGHT (mm)
PZ-02	3.6	3.5	2.6
PZ-1	5.5	4.2	2.6
PZ-2	9.5	6.6	4.0

+ SIZES AND PACKAGING

TYPE	DIAMETER / AREA*	LENGTH	NUMBER OF CHARACTERS	PACKAGING		
PZ-02	~1.3 - 3.0 mm 0.5 to 0.75 mm ²	3 mm	1		bag of 5x200 pcs - cut bag of 250 pcs - strips	 roll of 1000 pcs disc of 500 pcs
PZ-1	~2.5 - 5.0 mm 0.75 to 4.0 mm ²	3 mm	1		bag of 5x200 pcs - cut bag of 250 pcs - strips	 roll of 1000 pcs disc of 500 pcs
PZ-2	~4.0 - 10.0 mm 2.5 to 10.0 mm ²	4 mm	1		bag of 5x100 pcs - cut bag of 250 pcs - strips	 disc of 250 pcs

* Size shown refers to BS6231 tri-rated cable.

+ RELATED PRODUCTS



MD/MDH
PAGE 89



CAS
PAGE 88



PUJ/MD10
PAGE 91

+ APPLICATION

