


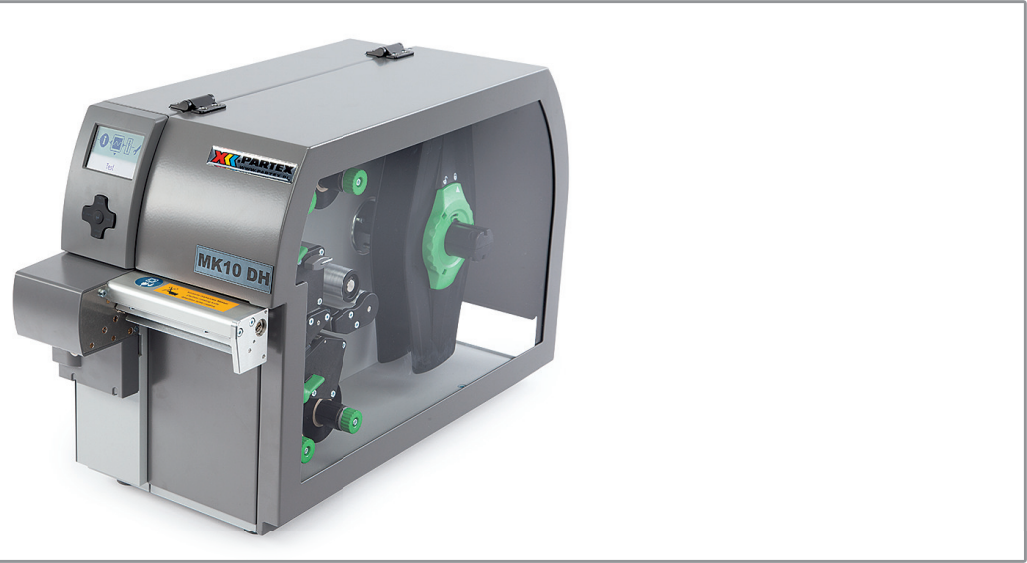

* pictured with optional cutting unit

+ INFORMATION

- + Prints on both sides of the profile. (Dual printing heads)
- + Compact heavy duty printer for high demand production of wire, cable and component markings.
- + Feeds, prints and cuts bulk Partex profiles.
- + USB connection, controlled by Partex WinSign software.

+ PROPERTIES

Temperature range

Operating temperature: +10°C to +35°C

To obtain the best printing result, the temperature of the profile shouldn't be lower then: +25 °C

Working conditions:

Humidity: 30 - 85 %

Thermal transfer printing

300 dpi print resolution

Width of printing head

105 mm

PC connection

USB and Partex software WinSign

Power supply

100 ~ 240V (50-60Hz)

Power consumption: Max 300 W

CE-certified

Dimensions

(L x W x H): 554 x 248 x 395 mm

Weight

21 kg


+ KIT CONTENTS

- + MK10-DH,
- + power cord,
- + Starting ribbon black 360 m,
- + USB cable
- + WinSign software.

+ ACCESSORIES



MK-STV
Reel stand



MK-RS3
Small reel stand



MK10-CU
Cutting



RIBBONS
PAGE 81



+ SPECIFICATION

- + MK10-DH is a modern thermal transfer printer with a high production speed (up to 125mm/sec).
- + MK10-DH can be connected directly to a computer with a USB cable and is controlled by Partex Winsign software. It prints onto both sides of the profile, direct from the reel, and can cut the markers to the required length.



+ PO-PROFILE

TYPE	HALOGEN FREE VERSION	DIAMETER [mm] [min/max]	CROSS SECTIONAL [mm²]	PACKAGING
P0-01	P0Z01	1.3/1.8	0.25	6 m / 250 m
P0-02	P0Z02	1.7/2.2	0.5	5 m / 60 m / 250 m
P0-03	P0Z03	2.0/2.5	0.75	4.5 m / 50 m / 250 m
P0-04	P0Z04	2.2/2.8	1.0	4.5 m / 50 m / 200 m
P0-05	P0Z05	2.7/3.5	1.5	4 m / 40 m / 200 m
P0-06	P0Z06	3.2/4.0	2.5	3.5 m / 40 m / 200 m
P0-06Q**	-	-	-	3.5 m / 40 m
P0-068Q**	PKZ20Q	-	-	25 m / 50 m
P0-068TW	PKZ20	6.8/7.0	-	4.5 m / 50 m
P0-07	P0Z07	3.8/4.7	4.0	3.5 m / 30 m / 100 m
P0-08	P0Z08	4.6/5.5	6.0	3 m / 30 m / 100 m
P0-09	P0Z09	5.6/7.0	10.0	50 m
P0-10	P0Z10	6.5/8.0	16.0	50 m



P0/P0Z
▶ PAGE 28



P0-068
▶ PAGE 28

STANDARD COLOUR: yellow, white. Others on request. * Mounting with marker holder POH or PKH ** Mounting with cable tie

+ FLAT HEATSHRINKABLE TUBES PHZF

TYPE	DESCRIPTION	PACKAGING
PHZF20024	flat heat shrink 2.4 / 1.2 mm	100 m / 25 m
PHZF20032	flat heat shrink 3.2 / 1.6 mm	100 m / 25 m
PHZF20048	flat heat shrink 4.8 / 2.4 mm	100 m / 25 m
PHZF20064	flat heat shrink 6.4 / 3.2 mm	100 m / 25 m
PHZF20095	flat heat shrink 9.5 / 4.8 mm	75 m
PHZF20127	flat heat shrink 12.7 / 6.4 mm	50 m
PHZF20190	flat heat shrink 19.0 / 9.5 mm	50 m
PHZF20254	flat heat shrink 25.4 / 12.7 mm	50 m
PHZF20380	flat heat shrink 38.0 / 19.1 mm	50 m



PHZF
▶ PAGE 34

STANDARD COLOUR: yellow, white. Others on request.



+

PP+ PROFILE

TYPE	HEIGHT [mm]	FIT FOR	PACKAGING
PP+046	4.6	PT+, PTC, PTZ, PM-10	50 m / 17 m
PP+10	10.2	terminals Phoenix Contact *	50 m / 17 m
PP+063	6.3	PM-20, PS	50 m / 17 m
PP+09	9.0	terminals ABB Entreclec	50 m / 17 m
PP+110	11.0	terminals Wago (TopJobs)	50 m / 17 m
PPA+09	9.0	components	20 m / 10 m

STANDARD COLOUR: yellow, white. * UT2.5, UTTB2.5, ST4, DT2.5, QTC, DTI2.5



PP+
▶ PAGE 84



PT+
▶ PAGE 48



PTC
▶ PAGE 50



PM
▶ PAGE 52



PTM
▶ PAGE 54



PS
▶ PAGE 82

+

PPQ+

TYPE	HEIGHT [mm]	LENGTH [mm]	PACKAGING
PPQ+10040	10	40	500 pcs.
PPQ+10060	10	60	333 pcs.
PPQ+10080	10	80	250 pcs.
PPQ+19040	19	40	500 pcs.
PPQ+19060	19	60	333 pcs.
PPQ+19080	19	80	250 pcs.
PPQ+38060	38	60	333pcs.
PPQ+38080	38	80	250 pcs.
PPQ+38100	38	100	200 pcs.

STANDARD COLOUR: yellow, white. MOUNTED with cable tie.



PPQ+
▶ PAGE 56

