

NEW



+

INFORMATION

- + Compact heavy duty printer for high demand production for wire, cable and component marking.
- + Feeds, prints and cuts bulk Partex profiles.
- + MK10 is a very cost effective identification system for use in panel building and electrical installations.
- + USB connection, controlled by Partex software.
- + Quick and simple handling thanks to the touch screen.
- + The built-in Wi-Fi module allows for wireless data transmission.

+

PROPERTIES

Temperature range

Operating temperature: 0°C - 40°C

Storage temperature: 0°C - 60°C

To obtain the best printing result, the temperature of the profile shouldn't be lower than: 20 - 25°C

Thermal transfer printing

300 dpi print resolution

Printing speed

300mm/sec

Width of printing head

105,7 mm

PC connection

USB and Partex software

Operating System

Windows: 2000, 2003, XP, Vista, Windows 7, Windows 10

Memory

256 MB RAM, 50 MB IFFS

Power

110~240 V AC, (50~60 Hz), FCC class A, CB, CCC, cUL

Certified with CE mark

Dimensions

(W x D x H): 252 x 288 x 460 mm

Weight

10 kg

+

KIT CONTENTS

- + Printer MK10-SQUIX
- + Cutter (optional)
- + Power cord
- + Starting ribbon black 360m
- + USB cable
- + Software
- + Wi-Fi module 



SPECIFICATION

- + MK10-SQUIX is a modern thermal transfer printer with a high production speed (up to 300mm/sec).
- + MK10-SQUIX can be connected to your computer with a USB cable or WI-Fi module and controlled by Partex software.
- + The profiles are introduced to the printer from outside or unrolled from rolls and discs placed inside the device, then they are printed and perforated to the specified length selected by the user.
- + Numerous features, the touch screen, and broad printer head with 300 dpi resolution make that this is an excellent device for industrial applications.



PROFILES TO PRINT

- + PO and POZ profiles with diameters of 1.3 - 8.0mm (POZ is the halogen-free version).
- + PHZF - Flat, halogen-free, heat shrinkable tubes with diameters 2.4 - 38.0mm before shrinking.
- + PP+ profile - Height of 4.6 and 9.0mm compatible with profiles: PT+/PTC/PTZ and PM, PTM, PS.
- + PP+ profile - Height of 6.3, 10.0 and 11.0mm compatible with Wago connectors (TopJobs), Phoenix Contact, Etrelec.
- + PPA+ - Self-adhesive profile.
- + PO-068 profile - Used for marking cables with PKH and POH holders.
- + Labels.
- + Prosleeve:
 - The series of specialised markers with increased resistance
 - ladder format printable heat-shrink tubing SG,MS,HF,NF,EF,ET
 - cable markers CMZ,CMM,CMD,CML,CMT
 - panel label EPL,EPF.




ACCESSORIES



MK-STV

Reel stand



MK-RS3

Small reel stand



MK10-CU

Cutting unit



RIBBONS



PO-PROFILE

TYPE	HALOGEN FREE VERSION	DIAMETER [mm] [min/max]	CROSS SECTIONAL [mm²]	PACKAGING
PO-01	POZ01	1.3/1.8	0.25	6 m / 250 m
PO-02	POZ02	1.7/2.2	0.5	5 m / 60 m / 250 m
PO-03	POZ03	2.0/2.5	0.75	4.5 m / 50 m / 250 m
PO-04	POZ04	2.2/2.8	1.0	4.5 m / 50 m / 200 m
PO-05	POZ05	2.7/3.5	1.5	4 m / 40 m / 200 m
PO-06	POZ06	3.2/4.0	2.5	3.5 m / 40 m / 200 m
PO-06Q**	-	-	-	3.5 m / 40 m
PO-068Q**	PKZ20Q	-	-	25 m / 50 m
PO-068TW	PKZ20	6.8/7.0	-	4.5 m / 50 m
PO-07	POZ07	3.8/4.7	4.0	3.5 m / 30 m / 100 m
PO-08	POZ08	4.6/5.5	6.0	3 m / 30 m / 100 m
PO-09	POZ09	5.6/7.0	10.0	50 m
PO-10	POZ10	6.5/8.0	16.0	50 m

STANDARD COLOUR: yellow, white. Others on request.

* Mounting with marker holder POH or PKH

** Mounting with cable tie



PO/POZ



PO-068



FLAT HEATSHRINKABLE TUBES PHZF

TYPE	DESCRIPTION	PACKAGING
PHZF20024	Flat heat shrink 2.4 / 1.2 mm	100 m / 25 m
PHZF20032	Flat heat shrink 3.2 / 1.6 mm	100 m / 25 m
PHZF20048	Flat heat shrink 4.8 / 2.4 mm	100 m / 25 m
PHZF20064	Flat heat shrink 6.4 / 3.2 mm	100 m / 25 m
PHZF20095	Flat heat shrink 9.5 / 4.8 mm	75 m
PHZF20127	Flat heat shrink 12.7 / 6.4 mm	50 m
PHZF20190	Flat heat shrink 19.0 / 9.5 mm	50 m
PHZF20254	Flat heat shrink 25.4 / 12.7 mm	50 m
PHZF20380	Flat heat shrink 38.0 / 19.1 mm	50 m

STANDARD COLOUR: yellow, white. Others on request.



PHZF





PP+ PROFILE

TYPE	HEIGHT [mm]	FIT FOR	PACKAGING
PP+046	4.6	PT+, PTC, PTZ, PM-10	17 m
PP+10	10.2	Phoenix Contact terminal blocks*	17 m
PP+063	6.3	PM-20, PS	17 m
PP+09	9.0	ABB Entrellec terminal blocks and PM sleeves	17 m
PP+110	11.0	Wago (Top Jobs) terminal blocks	17 m
PPA+09	9.0	Components	10 m

STANDARD COLOUR: yellow, white. * UT2.5, UTTB2.5, ST4, DT2.5, QTC, DTI2.5

PP+046

PP+



PT+



PTC



PM



PTM



PS




PPQ+

TYPE	HEIGHT [mm]	LENGTH [mm]	PACKAGING
PPQ+10040	10	40	500 pcs.
PPQ+10060	10	60	333 pcs.
PPQ+10080	10	80	250 pcs.
PPQ+19040	19	40	500 pcs.
PPQ+19060	19	60	333 pcs.
PPQ+19080	19	80	250 pcs.
PPQ+38060	38	60	333 pcs.
PPQ+38080	38	80	250 pcs.
PPQ+38100	38	100	200 pcs.

STANDARD COLOUR: yellow, white. MOUNTED: by cable tie.



PPQ+

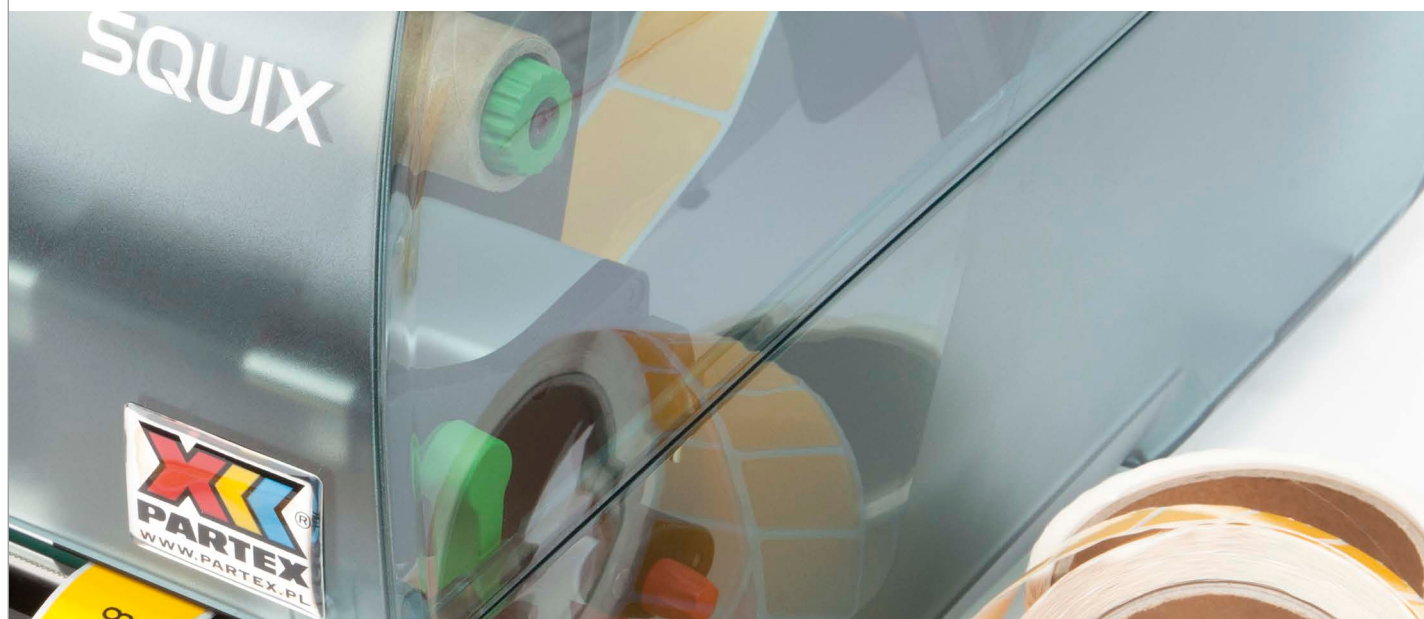

MARKING MACHINE