



INFORMATION

- + Open marker sleeve with label pocket for snap on mounting on cables and wires.
- + Flexible mounting of holder sleeve before or after connection of wire or cable.
- + Fast insertion of marker tag by light pressure on top of pocket.
- + The marker sleeve is secured by stiff barbs but is still readjustable.



PROPERTIES

Temperature range
-30°C to +60°C


Material
PVC non-flammable, self-extinguishing according to UL94-V0



RELATED PRODUCTS




APPLICATION

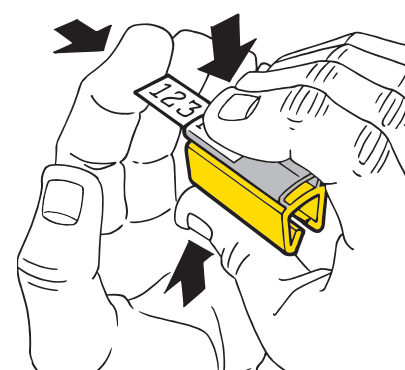

PTC10021A4

+ DIMENSIONS



TYPE	HEIGHT (H mm)	WIDTH (W mm)	WIDTH (W2 mm)
PTC-10	5.4	3.7	4.6
PTC-20	6.5	4.5	4.6
PTC-30	7.8	5.7	4.6
PTC-40	9.3	6.9	4.6
PTC-50	10.8	8.2	4.6

+ SIZES AND PACKAGING

TYPE	DIAMETER / AREA	LENGTH	SUITABLE TAG	PACKAGING
PTC10	~2.4 - 3.0 mm ~0.5 - 1.5 mm ²	15 mm 21 mm 30 mm	PFC042 or PP+046	 pack of 200 pcs.
PTC20	~3.0 - 4.0 mm ~1.5 - 2.5 mm ²	15 mm 21 mm 30 mm	PFC042 or PP+046	 pack of 200 pcs.
PTC30	~4.0 - 5.0 mm ~2.5 - 4.0 mm ²	15 mm 21 mm 30 mm	PFC042 or PP+046	 pack of 200 pcs.
PTC40	~5.0 - 6.2 mm ~4.0 - 6.0 mm ²	15 mm 21 mm 30 mm	PFC042 or PP+046	 pack of 100 pcs.
PTC50	~6.0 - 7.2 mm ~6.0 - 10.0 mm ²	15 mm 21 mm 30 mm	PFC042 or PP+046	 pack of 100 pcs.

* Size shown refers to BS6231 tri-rated cable.

