




#### INFORMATION

- + Complete marking system for cables, pipes and components.
- + Single-character and multi-character markers which can be combined on site.
- + Enhanced durability and top quality for use in extreme conditions.
- + Easy to install with steel cable ties.

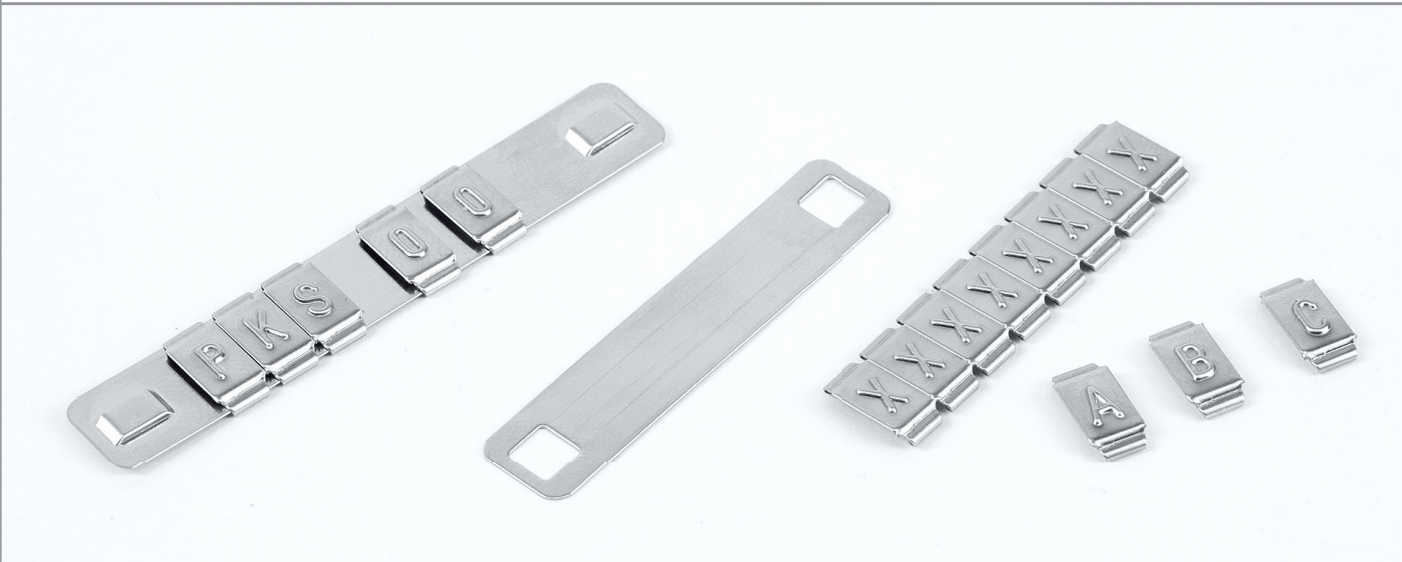


#### PROPERTIES

**Temperature range**  
Extreme conditions

**Material**  
Stainless steel equivalent to AISI 316

**Print**  
embossed



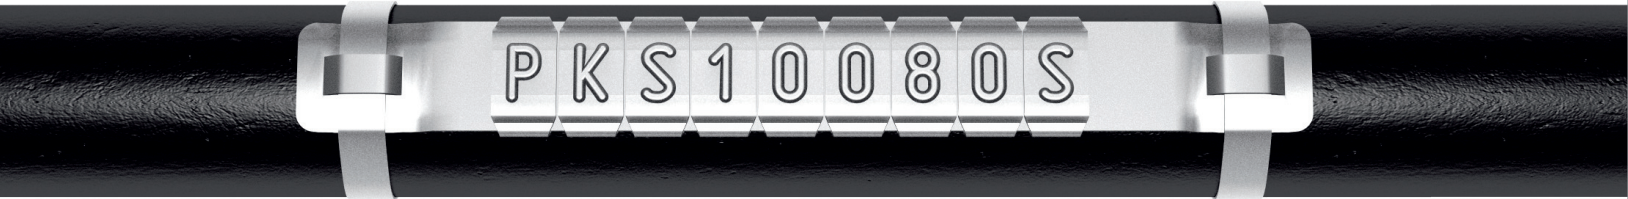

+ DIMENSIONS AND PACKAGING

| TYPE       | DESCRIPTION                                      | NUMBER OF CHARACTERS | LENGTH (Lmm) | HEIGHT (W mm) | SLOT WIDTH (SW mm) | QUANTITY IN PACK                                                                              |
|------------|--------------------------------------------------|----------------------|--------------|---------------|--------------------|-----------------------------------------------------------------------------------------------|
| PKS10006PP | single character:<br>A-Z, and 0-9, + - / . : ~ ↓ | -                    | 5.5          | 10.9          | 4.8                |  50 pcs. |
| PKS10040*  | 47 mm carrier strip                              | 6                    | 47.0         | 10.3          | 4.8                |  50 pcs. |
| PKS10060*  | 65 mm carrier strip                              | 9                    | 65.0         | 10.3          | 4.8                |  50 pcs. |
| PKS10080*  | 87 mm carrier strip                              | 13                   | 87.0         | 10.3          | 4.8                |  50 pcs. |
| PKS10100*  | 107 mm carrier strip                             | 17                   | 109.0        | 10.3          | 4.8                |  50 pcs. |
| PKS10120*  | 128 mm carrier strip                             | 20                   | 128.0        | 10.3          | 4.8                |  50 pcs. |

\* S = slot, H = hole (e.g. PKS10040S or PKS10040H)



+ RELATED PRODUCTS





SST  
PAGE 100



SSTC  
PAGE 101

+ APPLICATION

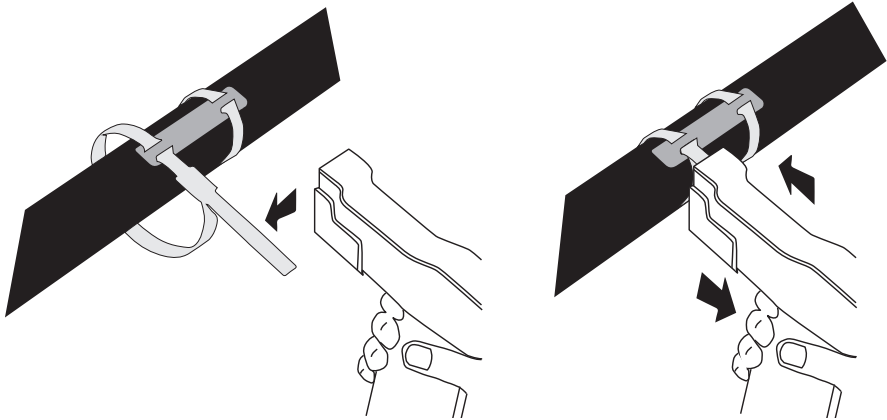

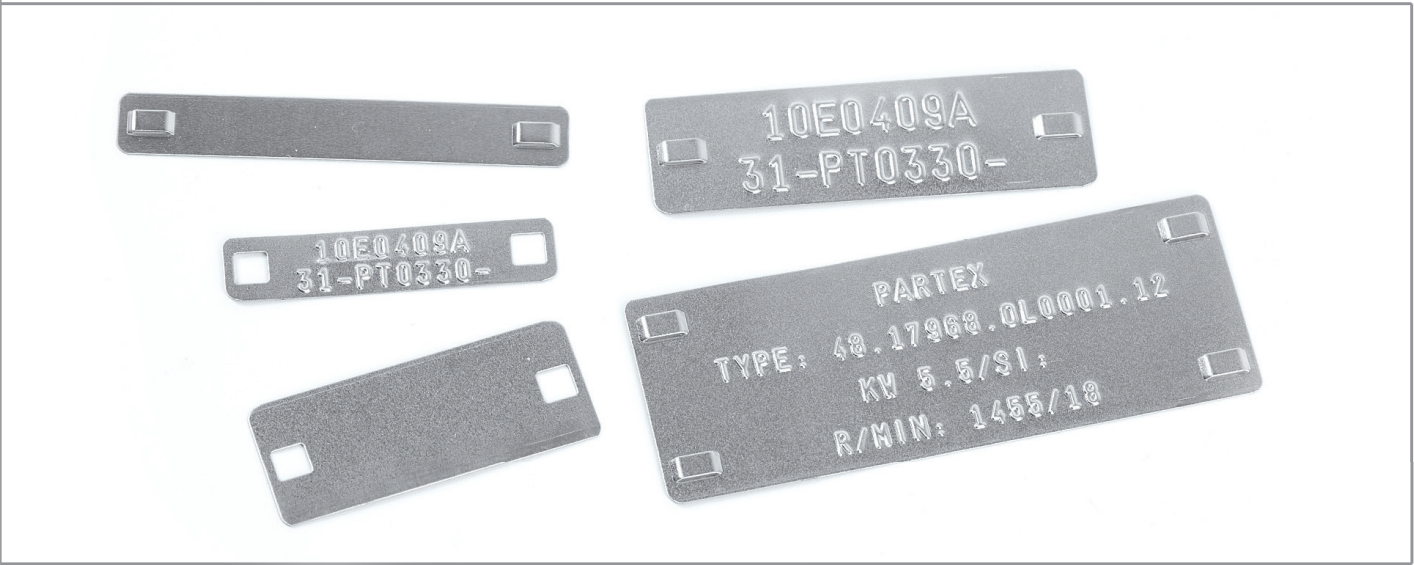

+ INFORMATION

- + Brushed stainless steel equivalent to AISI 316
- + Works in extreme conditions
- + Resistant to fire, water, moisture and corrosion
- + Brushed surface reduces light reflection (torch effect)
- + Mounted with cable ties, screws or rivets

+ PROPERTIES

**Temperature range**  
extreme conditions

**Material**  
AISI 316 stainless steel

**Print**  
embossed

**Packaging**  
sorted on adhesive tape





+ DIMENSIONS


| TYPE  | HEIGHT [mm] | LENGTH [L mm]        | SLOT WIDTH [SW mm] | NUMBER OF FITTINGS | TEXT HEIGHT | MAX NO OF LINES * |
|-------|-------------|----------------------|--------------------|--------------------|-------------|-------------------|
| PKS10 | 10          | 50, 70, 90, 110, 130 | 4,8                | single 2 x 1       | 3,2 / 5,5   | 2                 |
| PKS19 | 19          | 50, 70, 90, 110, 130 | 4,8                | single 2 x 1       | 3,2 / 5,5   | 3                 |
| PKS25 | 25,4        | 50, 70, 90, 110, 130 | 4,8                | single 2 x 1       | 3,2 / 5,5   | 4                 |
| PKS32 | 32          | 50, 70, 90, 110, 130 | 4,8                | double 2 x 2       | 3,2 / 5,5   | 4                 |
| PKS38 | 38          | 50, 70, 90, 110, 130 | 4,8                | double 2 x 2       | 3,2 / 5,5   | 4                 |

\* depending on the size of the font

SINGLE (2x1)



DOUBLE (2x2)

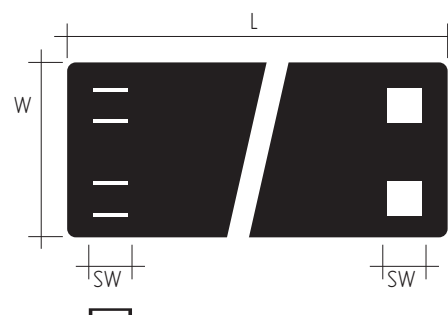

+ MAXIMUM NUMBER OF CHARACTERS PER LINE

| LENGTH | TEXT HEIGHT [5,5 mm] | TEXT HEIGHT [3,2 mm] |
|--------|----------------------|----------------------|
| 50     | 8                    | 11                   |
| 70     | 13                   | 18                   |
| 90     | 18                   | 26                   |
| 110    | 23                   | 33                   |
| 130    | 28                   | 41                   |



+ RELATED PRODUCTS




SST  
PAGE 100



SSTC  
PAGE 101

+ APPLICATION

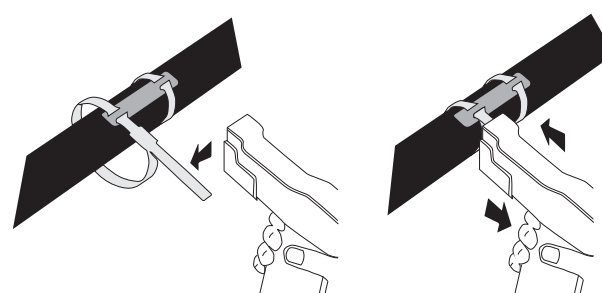



+ INFORMATION

- + Brushed stainless steel equivalent to AISI 316
- + Works in extreme conditions
- + Resistant to fire, water, moisture and corrosion
- + Brushed surface reduces light reflection (torch effect)
- + Mounted with cable ties, screws or rivets
- + Bar codes, symbols and logos can be engraved

+ PROPERTIES

**Temperature range**  
extreme conditions

**Material**  
AISI 316 stainless steel

**Print**  
laser engraved

**Packaging**  
sorted into bags





+ DIMENSIONS


| TYPE  | HEIGHT [mm] | LENGTH [L mm]        | SLOT WIDTH [SW mm] | NUMBER OF FITTINGS* |
|-------|-------------|----------------------|--------------------|---------------------|
| PKS10 | 10          | 50, 70, 90, 110, 130 | 4,8                | single 2 x 1        |
| PKS19 | 19          | 50, 70, 90, 110, 130 | 4,8                | single 2 x 1        |
| PKS25 | 25,4        | 50, 70, 90, 110, 130 | 4,8                | single 2 x 1        |
| PKS32 | 32          | 50, 70, 90, 110, 130 | 4,8                | double 2 x 2        |
| PKS38 | 38          | 50, 70, 90, 110, 130 | 4,8                | double 2 x 2        |

\* deep slots for nylon ties, or square holes for screws/rivets. Please specify when ordering.

SINGLE (2x1)



DOUBLE (2x2)

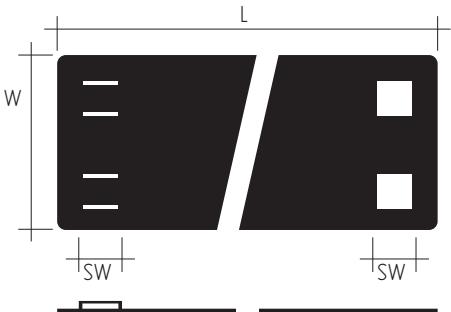

+ RELATED PRODUCTS



SST  
PAGE 100



SSTC  
PAGE 101

+ APPLICATION

