


PPQZ cable marker

- Flat cable halogen free marker with pre punched holes
- Easy mounted on the cable with cable ties
- Print markers in Partex MK10 thermal transfer printers
- Fullfills requirements according to EN45545-2 HL3

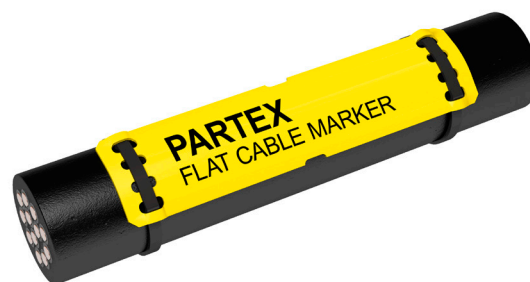

BENEFITS

PPQZ is a flat profile with pre punched holes. The profile is delivered semi cut on reels for printing in Partex MK10 system or as a ready printed marker.

PPQZ is easily mounted on a cable with cable ties.

The markers are printed on MK10 thermal transfer printers and designed in the Promark Creator software. They can also be ordered as customized, pre-printed markers.

TECHNICAL INFORMATION

Material

Flexible and halogen free polyolefin

Temperature range

-55°C to +105°C

Resistance properties

Reach and RoHS

EN 45545-2 class HL3

Flammability resistance according to UL94-HB

LUL S1085 Att. B.5

NF F16-101

Colours

Standard: Yellow (4), white (9).

Non-standard colour: Brown (1), red (2), green (5), blue (6).

Printing

Printable in recommended standard MK10 thermal transfer printers. Use Promark Creator software for design and production management.

Ribbons

Black: MK10-RB-PX6 and MK10-RB-PR8

White: MK10-RW01



PRODUCT SIZE AND PACKAGING

Article number	Size W x L [mm]	Markers/reel [pcs]	Type
PPQZ06012SDN*	12 x 60	1000	Frame style
PPQZ07515SDN*	15 x 75	1000	Frame style
PPQZ07525SDN*	25 x 75	500	Frame style



Frame

Article number	Size W x L [mm]	Markers/reel [pcs]	Type
PPQZ06010DN*	10 x 60	1000	Ladder style
PPQZ08010DN*	10 x 80	1000	Ladder style
PPQZ06019DN*	19 x 60	500	Ladder style
PPQZ08019DN*	19 x 80	500	Ladder style
PPQZ08038DN*	38 x 80	250	Ladder style



Ladder

Article number	Size W x L [mm]	Markers/reel [pcs]	Type
PPQZ10040DN*	10 x 40	500	Continuous style
PPQZ10060DN*	10 x 60	330	Continuous style
PPQZ10080DN*	10 x 80	250	Continuous style
PPQZ10100DN*	10 x 100	200	Continuous style
PPQZ19040DN*	19 x 40	500	Continuous style
PPQZ19060DN*	19 x 60	330	Continuous style
PPQZ19080DN*	19 x 80	250	Continuous style
PPQZ19100DN*	19 x 100	200	Continuous style
PPQZ38060DN*	38 x 60	330	Continuous style
PPQZ38080DN*	38 x 80	250	Continuous style
PPQZ38100DN*	38 x 100	200	Continuous style
PPQZ50080DN*	50 x 80	250	Continuous style
PPQZ50100DN*	50 x 100	200	Continuous style



Continuous

*) Colour code Standard: Yellow (4), white (9).
Non-standard colour: Brown (1), red (2), green (5), blue (6).

TECHNICAL DATA

Properties	Unit	Value	Test method
Density	g/cm ³	1.40	ASTM D-792
Thickness	mm	0,60	
Hardness	Shore A	93	
Tensile strength	N/mm ²	10	ASTM D-638
Elongation at break	%	200	ASTM D-638

RELATED PRODUCTS



MK10 printers

