

MULTI-TRACK BUFFER SYSTEM



TECHNICAL DATA

Type of conveyor	TTBD30 tandem conveyor, 12 tracks
Drive	2 belt sections each driven by 1 center drive
Conveyor width	105 mm
Usable conveyor width	93 mm
Conveyor length	1880 mm / 2080 mm
Max. transport weight	60 kg
Speed	4.6 m/min
Belt type endless	ENI-5EE
Substructure	Quick-Set profile framing system

INDUSTRY


Automotive supplier

SPECIAL FEATURES

- 1 drive for 2 belt sections via a drive shaft
- minimal monitoring required

PROJECT DESCRIPTION

This custom-designed multi-track buffer system allows molded glass parts to cool before moving onto the next workstation. The system features 12 tracks, with one drive powering every two belt sections linked by a drive shaft. The entire buffer system requires minimal monitoring by employees.

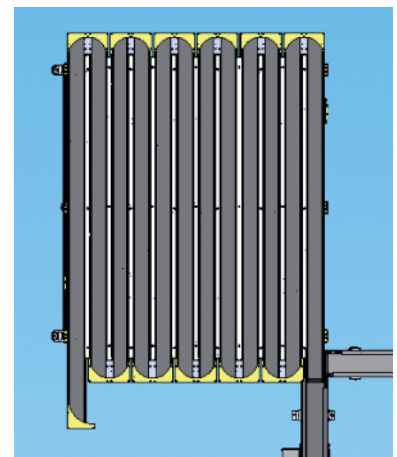

MONTECH[®]
more than technology

MONTECH AG
Gewerbstrasse 12
CH-4552 Derendingen
Fon +41 32 681 55 00
info@montech.com
www.montech.com