

Hornet-100

Product Features

Hitch-up system for CPT & UXO

Two main configurations: automatic and manual

Continuous drive penetration and retraction rates up to 25 cm/s

System utilizes Geomil's Continuous Drive System (CDS) for penetration and high productivity

Weight of 3 tons makes the system easily transportable

Unparalleled productivity rates on large jobsites

Safer UXO detection works with remote operation


Automatic leveling frame capable of correcting slopes of up to 10 degrees

UXO key features include inclinometer and an option to predefine a targeted depth

Can be fully remotely operated or fitted with a working platform for traditional operations

Digital CPT equipment or high sensitivity magnetometer cones

Designed to push 36 mm, 44 mm or 55 mm tubes

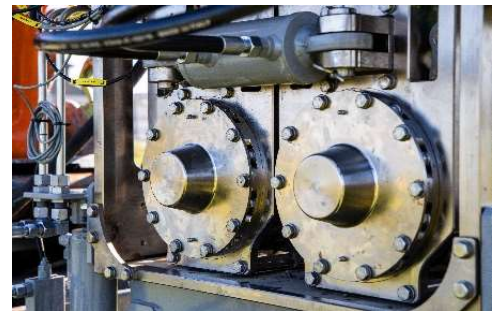

For more information please view our website: www.geomil.com/products/hornet. To request a quotation please contact sales@geomil.com or call us at +31 172 427 800.