


Voordat u verder gaat:

Sluit het modem aan volgens het schema (gevouwen poster) dat met de modem is meegeleverd. Een online versie van het schema evenals al onze handleidingen zijn beschikbaar op <http://www.internl.net/handleidingen/>.

Open een browser zoals Internet Explorer, Firefox, Chrome of Safari. Toets in de adresbalk het adres <http://192.168.178.1>.

Kies met onderstaand scherm voor **Annex A** (PSTN/ Analoog) of **Annex B** (ISDN).

Mocht u niet weten wat u hier moet kiezen, neem dan contact op met onze servicedesk.

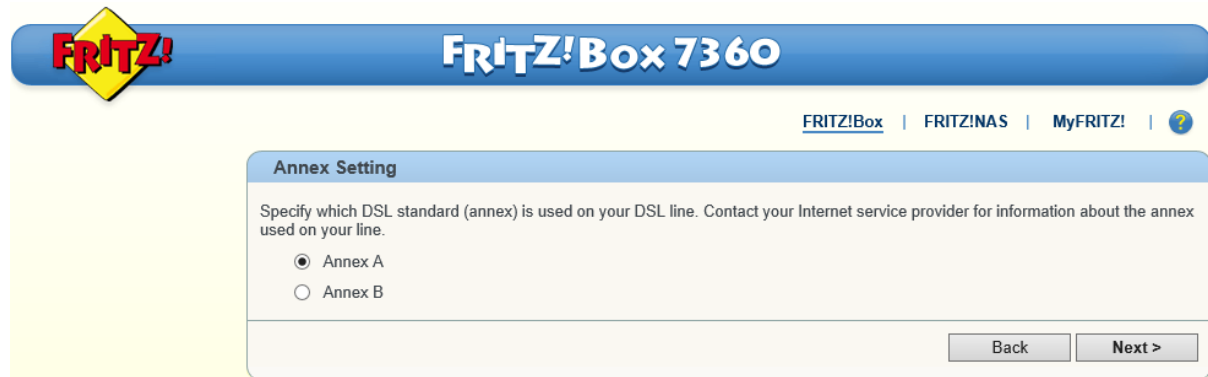

FRITZ! **FRITZ!Box 7360**


[FRITZ!Box](#) | [FRITZ!NAS](#) | [MyFRITZ!](#) | ?

Annex Setting

Specify which DSL standard (annex) is used on your DSL line. Contact your Internet service provider for information about the annex used on your line.

Annex A
 Annex B

[Back](#) [Next >](#)

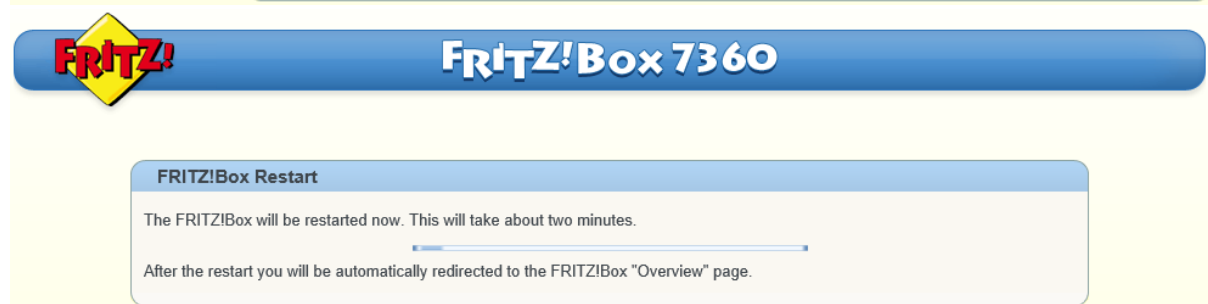


FRITZ! **FRITZ!Box 7360**

FRITZ!Box Restart

The FRITZ!Box will be restarted now. This will take about two minutes.

After the restart you will be automatically redirected to the FRITZ!Box "Overview" page.

Na uw keuze herstart het modem zich. Selecteer in de volgende schermen voor **Netherlands** als land en vervolgens **English** als taal.

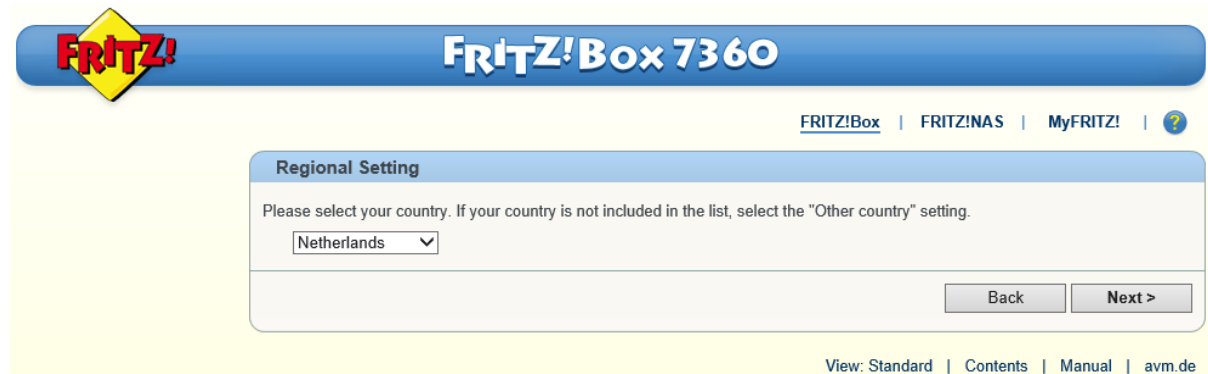

FRITZ! **FRITZ!Box 7360**

[FRITZ!Box](#) | [FRITZ!NAS](#) | [MyFRITZ!](#) | ?

Regional Setting

Please select your country. If your country is not included in the list, select the "Other country" setting.

Netherlands

[Back](#) [Next >](#)

[View: Standard](#) | [Contents](#) | [Manual](#) | [avm.de](#)



FRITZ! **FRITZ!Box 7360**

[FRITZ!Box](#) | [FRITZ!NAS](#) | [MyFRITZ!](#) | ?

Language Selection


Please select your language.

German
 English
 Spanish
 French
 Italian

[Next >](#)

[View: Standard](#) | [Contents](#) | [Manual](#) | [avm.de](#)

Voor toegang tot de modem is een wachtwoord vereist. Wanneer u het modem voor het eerst configureert dient u een nieuw wachtwoord aan te maken met dit scherm.

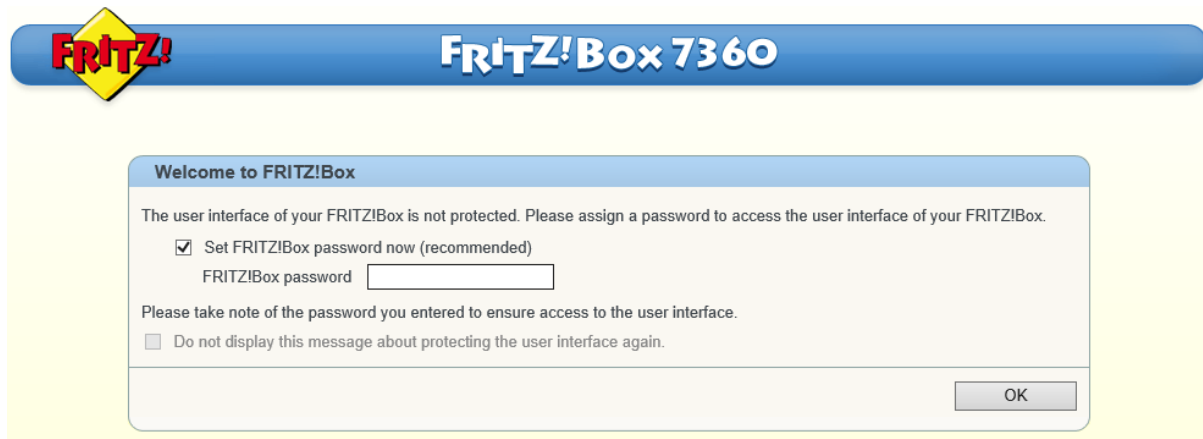

The screenshot shows the FRITZ!Box 7360 configuration interface. At the top, there is a blue header with the FRITZ! logo and the text "FRITZ!Box 7360". Below the header is a light blue box titled "Welcome to FRITZ!Box". Inside this box, the text reads: "The user interface of your FRITZ!Box is not protected. Please assign a password to access the user interface of your FRITZ!Box." There are two checkboxes: the first is checked and labeled "Set FRITZ!Box password now (recommended)", with a text input field for the password below it; the second is unchecked and labeled "Do not display this message about protecting the user interface again." An "OK" button is located at the bottom right of the box.

Het instelling van uw Flits ADSL verbinding op het netwerk van BBNed is niet mogelijk middels de Wizard. Klik daarom in het hier op **Cancel** en vervolgens **OK**.



The screenshot shows the FRITZ!Box 7360 configuration interface. At the top, there is a blue header with the FRITZ! logo and the text "FRITZ!Box 7360". Below the header, there is a navigation bar with "Logged in" and several links: "FRITZ!Box", "FRITZ!NAS", "MyFRITZ!", and a help icon. The main content area is a light blue box titled "Welcome". The text inside reads: "This Wizard assists you in configuring your FRITZ!Box. All of the necessary basic settings are performed in just a few steps. You can cancel the Wizard at any time and continue configuration at a later point in time. If you would like to apply settings to your FRITZ!Box that were saved before in another FRITZ!Box or in a compatible Speedport device, click here: [Apply settings](#)". At the bottom right of the box are "Next >" and "Cancel" buttons. In the foreground, there is a small dialog box titled "Bericht van webpagina" with a question mark icon. The text inside the dialog box reads: "If you exit the Wizard now, your entries will be lost. Select 'OK' to end the Wizard. Select 'Cancel' to return to the Wizard." There are "OK" and "Annuleren" buttons at the bottom of the dialog box.

The screenshot shows the 'Standard View' of the FRITZ!Box 7360 web interface. At the top, there is a blue header with the 'FRITZ!' logo and 'FRITZ!Box 7360'. Below the header, a navigation bar includes 'Logged in', 'FRITZ!Box', 'FRITZ!NAS', 'MyFRITZ!', and a help icon. On the left, a vertical menu lists 'Overview', 'Internet', 'Telephony', 'Home Network', 'WLAN', 'DECT', and 'System'. The 'Wizards' section is highlighted, showing a list of configuration steps: 'Manage Telephony Devices', 'Manage Telephone Numbers', 'Set Up Internet Connection', 'Check the status of the FRITZ!Box', 'Saving and Restoring Settings', 'Update', and 'Set Up Push Service'. Each step includes a brief description of its function. At the bottom right, there are links for 'View: Standard', 'Contents', 'Manual', and 'avm.de'.

Dit is de *Standard View* van het hoofdmenu van de AVM FRITZ!Box 7360.

Klik onderin het scherm op *View: Standard* zodat dit wijzigt naar *Advanced* en u het modem verder kan instellen.

Klik links in het menu op *Internet*, daarna *Account Information*.

The screenshot shows the 'Advanced View' of the FRITZ!Box 7360 web interface, specifically the 'Account Information' page. The header and navigation bar are identical to the Standard View. The left menu is also the same, but 'Account Information' is now highlighted. The main content area has a title 'Account Information' and three tabs: 'Internet Connection', 'LISP', and 'DNS Server'. Below the tabs, there is a text box stating: 'On this page you enter the data of your Internet connection, and can adjust the connection to special circumstances if needed.' Underneath, there is a section for 'Internet Service Provider' with the instruction 'Select your Internet service provider:'. This is followed by a dropdown menu labeled 'Internet service provider' with the text 'Please select...'. At the bottom right of the form area, there are three buttons: 'Apply', 'Cancel', and 'Help'. At the bottom right of the page, there are links for 'View: Advanced', 'Contents', 'Manual', and 'avm.de'.

Account Information

Internet Connection | LISP | DNS Server

On this page you enter the data of your Internet connection, and can adjust the connection to special circumstances if needed.

Internet Service Provider

Select your Internet service provider:

Internet service provider: ▼

Name:

Connection

Specify how the Internet connection should be established.

Connecting to a DSL Line
FRITZ!Box is connected to your DSL line using the DSL cable. The DSL modem integrated in the FRITZ!Box is used for the Internet connection.

Connecting to a Cable Modem (Cable Connection)
Select this kind of connection if the "LAN 1" port of the FRITZ!Box is connected to a cable modem that establishes the Internet connection.

External Modem or Router
Select this kind of connection if the "LAN 1" port of the FRITZ!Box is connected to an already existing external modem or router.

Account Information

Is account information required?

Yes

No

Connection Settings

The connection settings are already set to the values used most often. You can change these values if needed.

[Change connection settings](#) ▼

Check the Internet connection after "Apply" has been clicked

Apply Cancel Help

Selecteer bij **Internet service provider** voor **Other Internet service provider**.

Selecteer bij **Connection** voor **Connecting to a DSL Line**.

Selecteer bij **Account Information** de optie **No**.

Klik nu op de blauwe link **Change connection settings**.

Account Information

Is account information required?

Yes

No

Connection Settings

The connection settings are already set to the values used most often. You can change these values if needed.

[Change connection settings ▲](#)

VLAN Settings

Please note that a VLAN ID is required only in special cases. The required ID was supplied by your Internet service provider.

Use VLAN for Internet access

VLAN ID

DSL ATM Settings

VPI

VCI

Encapsulation

Bridged (Routed Bridge Encapsulation)

Obtain the IP address automatically (DHCP)

DHCP host name

Routed IP LLC NLPID (ISO)

Routed IP LLC Snap

Routed IP Raw

IP Address - - -

Subnet mask - - -

Default gateway - - -

Primary DNS server - - -


Secondary DNS server - - -

Check the Internet connection after "Apply" has been clicked

Laat de checkbox voor Vlan leeg. In het veld achter **VPI** het getal **0** in. Achter **VCI** moet **35** worden ingevuld. Klik op **Apply** en het volgende scherm laad voor het controleren van uw instellingen.

Saving of the Settings

The procedure was concluded successfully. The Internet connection will be checked soon.



Uw modem is nu klaar voor gebruik.

Mocht er onverhoopt geen werkende internetverbinding zijn, neemt u dan a.u.b. contact op met onze servicedesk, servicedesk@internl.net of 024-7070707.