

Intuition | Innovation | Perfection



MOUNTS • OPTICS • ELECTRONICS

MAKhellfire Owner's Manual



www.mak.ag




Made in Germany



MOUNTS • OPTICS • ELECTRONICS

Parts of MAKhellfire

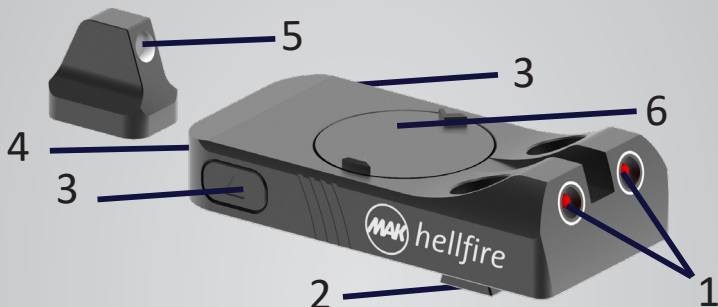

1	Rear actively lit up aiming marks
2	Dovetail rail (steel)
3	Two tactile Push-Buttons
4	High intensity Micro projector
5	Front aiming mark, illuminated
6	Battery CR1632



Please Read This Entire Handbook Before Attaching Your MAKhellfire



Always check and be certain that the firearm is unloaded before undertaking any work upon it.

1. Remove your pistols front sight with the remover tool.
2. Place your MAKhellfire front sight in the front notch and firmly tighten the screw (or fit it in the front notch) until the system is locked and secure.
3. Remove the stock rear sight with a remover tool.
4. Install your MAKhellfire rear sight onto pistol slide and firmly tighten the screws (or fit it in the rear notch)
5. Make sure every part of MAKhellfire is tight and secure.




DANGER

If a bore sighting collimator or any other bore obstructing device was used, it must be removed before proceeding. An obstruction can cause serious damage to the gun and possible injury to yourself and others nearby.



MOUNTS • OPTICS • ELECTRONICS

How to Attach Your MAKhellfire

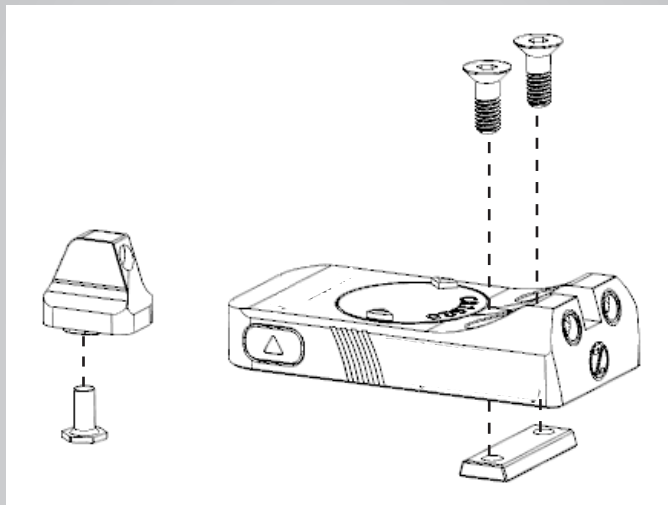

**IMPORTANT
NOTICE**

Your MAKhellfire sight is custom-designed for specific gun types as specified on the unique serial number sticker on the packaging. In case the packaging is not in hand, you may contact MAK Customer Service with the serial number marked on the product to receive information on the matching gun types: kilic@mak.ag



Features of MAKhellfire

**IMPORTANT
NOTICE**

Before attaching to weapons, check the regional legal regulations in the area of application.

The attachment to a weapon is always the sole responsibility of the user



Select color:

Push both buttons simultaneously 3 times to change between Red and Green color



Adjust illumination: Push up/down buttons to select one of 7 intensity levels.



MAKhellfire's rear sight can be mounted before or after assembly of your pistol



Make sure that no section of MAKhellfire blocks the operation of the action. Avoid over-tightening the screws. This can damage the MAKhellfire, affecting performance or rendering it inoperable.

Manual-Mode (default after battery change)

- **Press any button to turn your MAKhellfire ON**
- **Press any button 3 seconds to turn your MAKhellfire OFF**
- **Press left (up) button to INCREASE INTENSITY**
- **Press right (down) button to DECREASE INTENSITY**

Your MAKhellfire comes in Manual-mode as factory preset.



**In Auto-Mode, MAKhellfire falls asleep after 2 minutes if no motion is detected
In Manual-Mode MAKhellfire switches off after 20 minutes if no motion is detected.**



Auto-Mode (needs activation)

- Auto-Mode can be activated by holding both buttons until LED indicators **are starting to blink**.
- **Blinking 5 times** indicates that the system is on Auto-Mode.
- **Blinking 2 times** indicates that the system is on Manual-Mode.
- In Auto-Mode, the system falls asleep after 2 minutes and wakes up by movement.
- While asleep, the system does not draw energy from the battery (Zero-Energy consumption technology)

Emergency-OFF mode

- Press and hold one button, and press the other **button at the same time** to force-switch OFF the illumination when in Auto-Mode.
- Press any button to switch your MAKhellfire back ON in Auto-Mode.



MOUNTS • OPTICS • ELECTRONICS

CONTACT OUR CUSTOMER SERVICE DEPARTMENT:



Tel.: +49 9723 93805-0

Fax: +49 9723 93805-129

CONTACT OUR CUSTOMER SERVICE DEPARTMENT VIA
THE INTERNET:



kilic@mak.ag


<https://www.mak.ag>


Customer Satisfaction Survey

Your opinion matters for us.



<https://www.surveymonkey.de/r/VF38TB9>

Environmental notice The symbol  represents the need of separate disposal of the product and accessories. They should not be dumped with regular household waste but must be returned to a recycling collection point for electrical devices. Recycling helps reduce the consumption of raw materials.

All parts labelled with symbol  are valuable for recovery. For more information regarding this matter, contact our company or nearest recycling center. Please also dispose packaging with regarding to your area's environmental regulations



MOUNTS • OPTICS • ELECTRONICS

Warranty Form

If you experience any problems with our products return it with this document enclose an explanation of the problem

Item Number: _____

Product name: _____

Purchased Date: _____

Dealer/Distributor: _____

Your Name: _____

Your Address: _____

City: _____

Phone: _____

E-mail: _____

Brief Remark/Description of problem: _____



MOUNTS • OPTICS • ELECTRONICS

Additional Notes:

[illegible]