


UV RESISTANT NYLON CABLE TIES

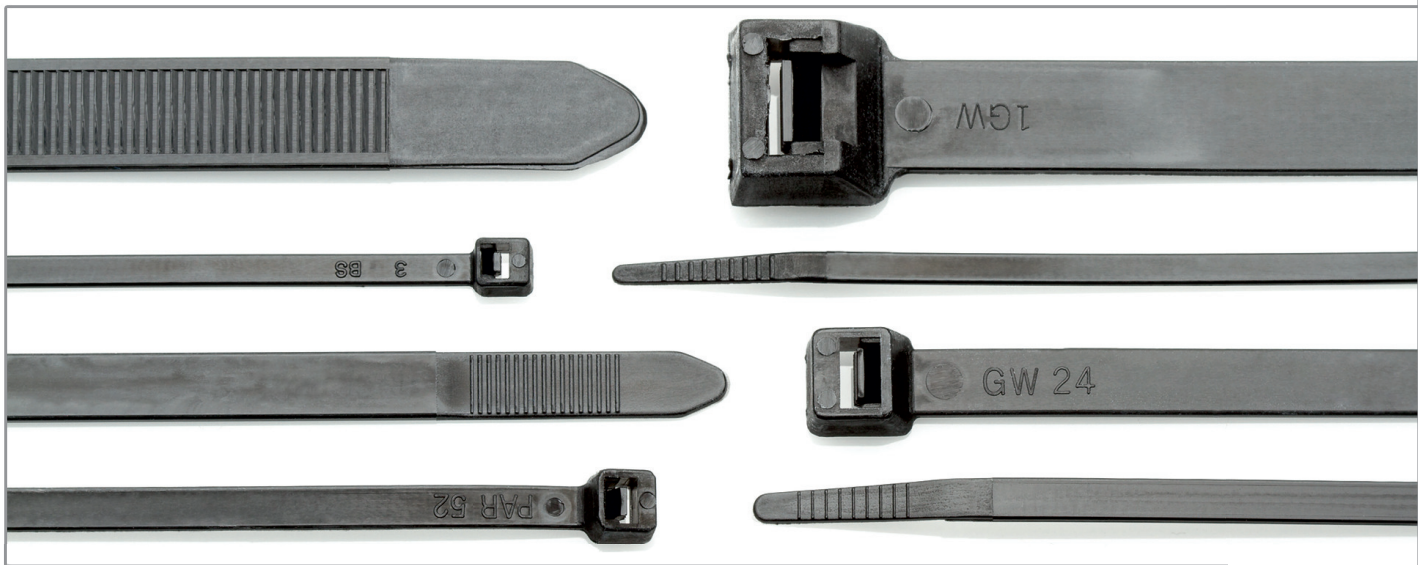

+ INFORMATION

- + Self Locking with high fixing strength.
- + UV and weather resistant ties, suitable for use outdoors.
- + Manufactured in accordance with MIL standard M20693B and in conformity with UL94V-2.
- + Only available in black.

+ PROPERTIES

**Temperature range**  
-40°C to +85°C

**Material**  
Nylon 6.6, in accordance with UL94-V2

**Standard colour**  
Black only

**Chemical resistance**  
high resistance to brake fluids, lubricants, power steering fluids, oil, grease, paints, lacquers, detergents, animal and vegetable fats, gasoline and alkalis up to 40%.



File No  
E475484



Items marked # are pending approval

+ DIMENSIONS AND PACKAGING

Ultra-violet Resistant Black Nylon 6.6 Cable Ties

| TYPE             | LENGTH (mm) | WIDTH (mm) | MAX BUNDLE DIAMETER (mm) | MIN. TENSILE STRENGTH (kg) | PACKAGING |
|------------------|-------------|------------|--------------------------|----------------------------|-----------|
| HFC 100 UVB      | 100         | 2.5        | 18                       | 8                          | 100       |
| HFC 140 UVB      | 140         | 3.6        | 33                       | 18                         | 100       |
| HFC 200 UVB      | 200         | 4.8        | 50                       | 22                         | 100       |
| HFC 300 UVB      | 300         | 4.8        | 76                       | 22                         | 100       |
| HFC 365 UVB      | 365         | 4.8        | 102                      | 22                         | 100       |
| HFC 530 UVB #    | 530         | 4.8        | 140                      | 22                         | 100       |
| HFC 160L UVB     | 160         | 2.5        | 40                       | 8                          | 100       |
| HFC 200L UVB     | 200         | 2.5        | 50                       | 8                          | 100       |
| HFC 200I UVB     | 200         | 3.6        | 50                       | 18                         | 100       |
| HFC 300L UVB #   | 300         | 3.6        | 76                       | 18                         | 100       |
| HFC 300H UVB #   | 300         | 7.6        | 76                       | 55                         | 100       |
| HFC 370H UVB     | 370         | 7.6        | 100                      | 55                         | 100       |
| HFC 530H UVB     | 530         | 9.0        | 140                      | 75                         | 100       |
| HFC 710H UVB     | 710         | 9.0        | 190                      | 75                         | 100       |
| HFC 1030EH UVB # | 1030        | 12.7       | 302                      | 113                        | 50        |

Only available in black.