

Product Technical Data Sheet - Heat Shrink Solder Butt Connectors

Description


Heat Shrink Solder Butt Connectors are ideal for joining cables without the need for crimping. When properly shrunk the solder within the butt flows connecting your wires together, whilst the melted adhesive rings in combination with heat-shrink tube provide a seal resistant to water and other contaminants (IP 67). The translucent tubing allows visual inspection ensuring the cables are inserted safely and correctly as well as providing excellent abrasion and strain resistance.



Specification

Insulation: Heat shrinkable polyolefin with integrated meltable thermoplastic adhesive rings.

Solder: Lead-free tin.

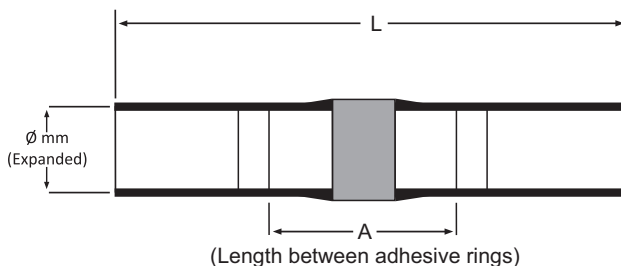

Part Number	Wire Range		L mm	Ø mm	A mm	Colour	Pack Quantity
	AWG	mm ²					
SHSB-1	38-28	0.1 - 0.5	26	1.5	15	White	10
SHSB-2	22-18	0.5 - 1.5	42	3.0	15	Red	25
SHSB-3	16-14	1.5 - 2.5	42	4.5	15	Blue	25
SHSB-4	12-10	3.2 - 6.0	42	6.0	15	Yellow	10

Partex Marking Systems (UK) Ltd
 61-64 Station Road, Coleshill, Birmingham B46 1JT
 Tel: 01675 463670 Fax: 01675 463520 Email: sales@partex.co.uk