


Soldered Heatshrink Butt Connectors

Heat Shrink Solder Butt Connectors are ideal for joining cables without the need for crimping. When properly shrunk the solder within the butt flows connecting your wires together, while the melted adhesive rings in combination with heat-shrink tube provide a seal resistant to water and other contaminants. The translucent tubing allows visual inspection ensuring the cables are inserted safely and correctly as well as providing excellent abrasion and strain resistance.

Insulation: Heat shrinkable polyolefin with integrated meltable thermoplastic adhesive rings.

Solder: Lead-free tin.

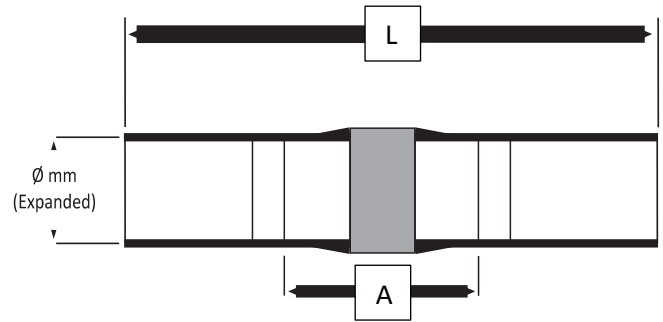

Color	Wire Size	PARTEX Part No.	Dimensions (in)		
			L	Ø	A
WHITE	38 - 28 AWG 0.1 - 0.5 mm ²	SHSB-1	1.024	0.059	0.591
Color	Wire Size	PARTEX Part No.	Dimensions (in)		
			L	Ø	A
RED	22-18 AWG 0.5 - 1.5 mm ²	SHSB-2	1.654	0.118	0.591
Color	Wire Size	PARTEX Part No.	Dimensions (in)		
			L	Ø	A
BLUE	16 - 14 AWG 1.5-2.5mm ²	SHSB-3	1.654	0.177	0.591
Color	Wire Size	PARTEX Part No.	Dimensions (in)		
			L	Ø	A
YELLOW	12-10 AWG 3.2 - 6.0 mm ²	SHSB-4	1.654	0.236	0.591